



METRIC
DIMENSIONS LISTED IN mm [INCHES]

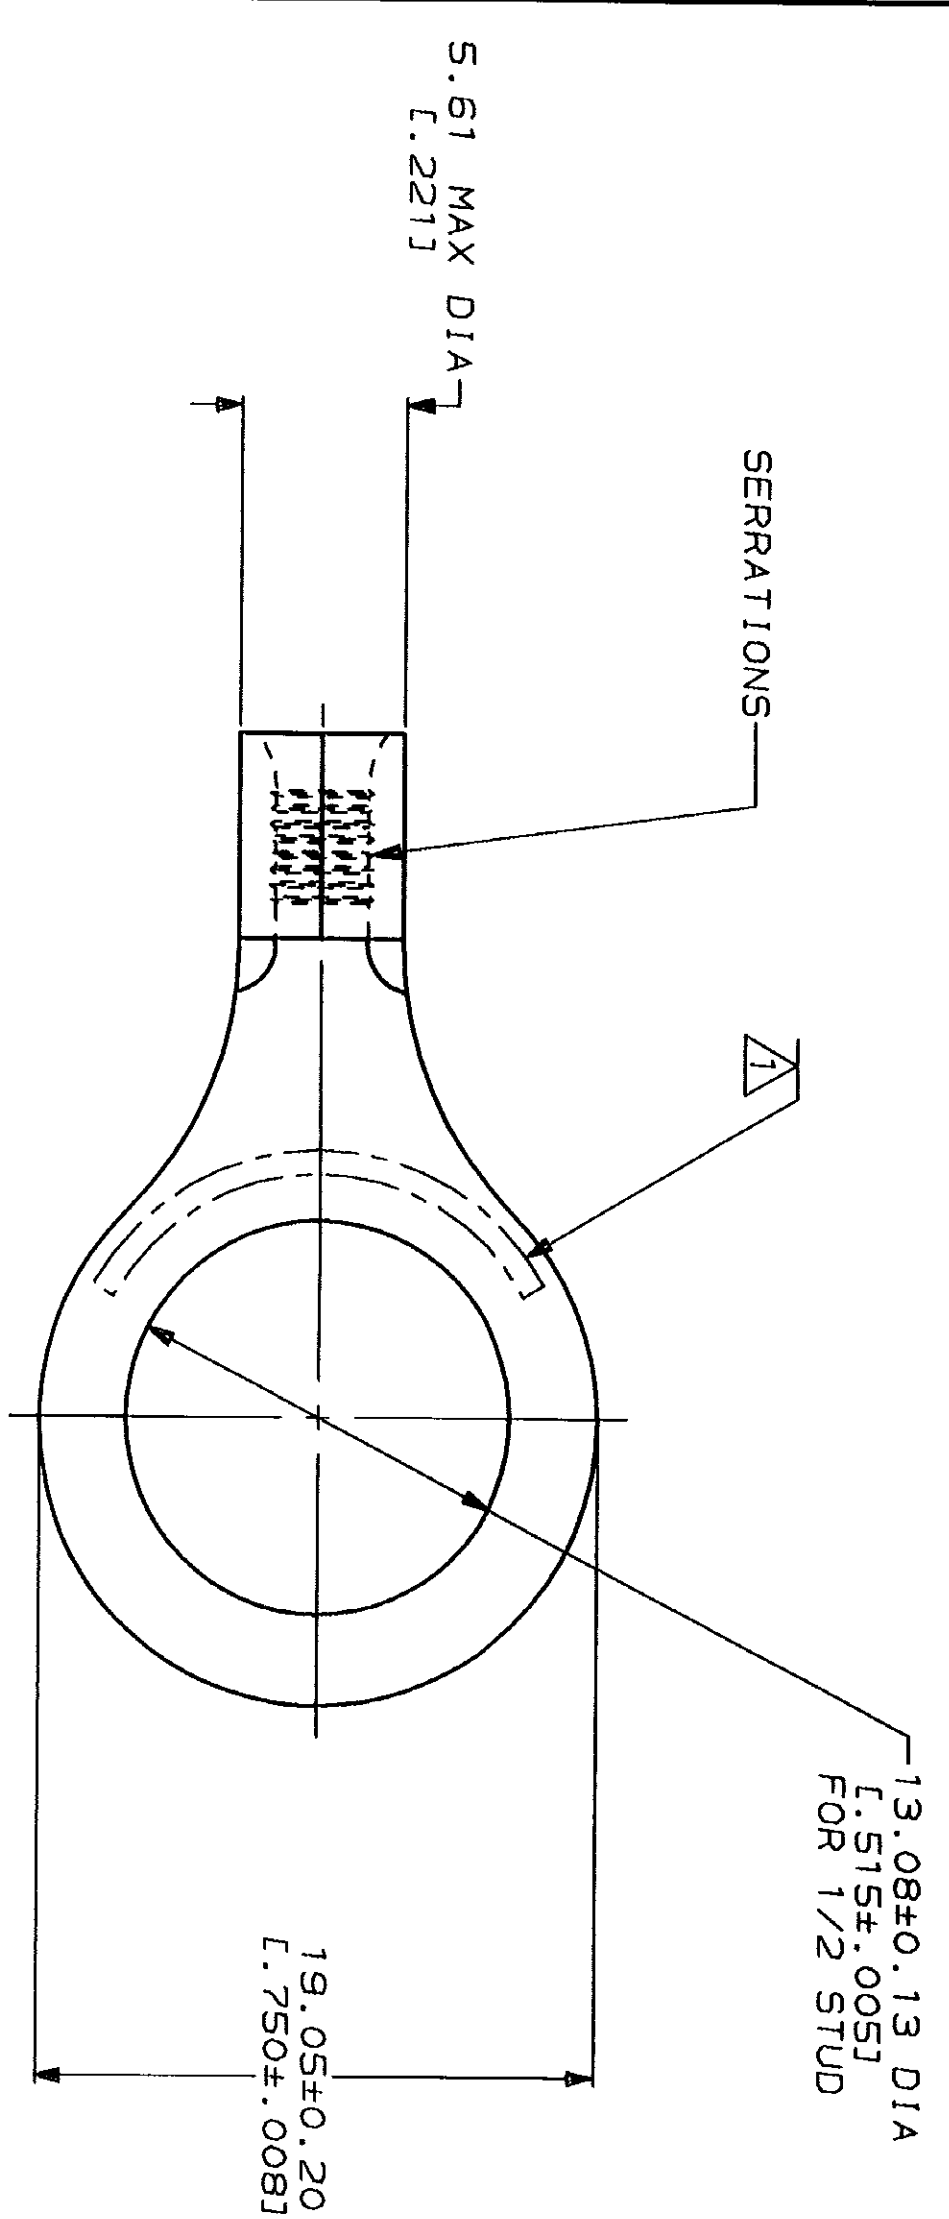

AMP WIRE RANGE		UL Listed
16-14HD AWG STRANDED		16-14HD AWG STRANDED
LR7189 Certified		MILITARY P/N AND CLASS
NOT CERTIFIED		NOT APPLICABLE

1 STAMP AMP 16-14HD* APPROX AS SHOWN

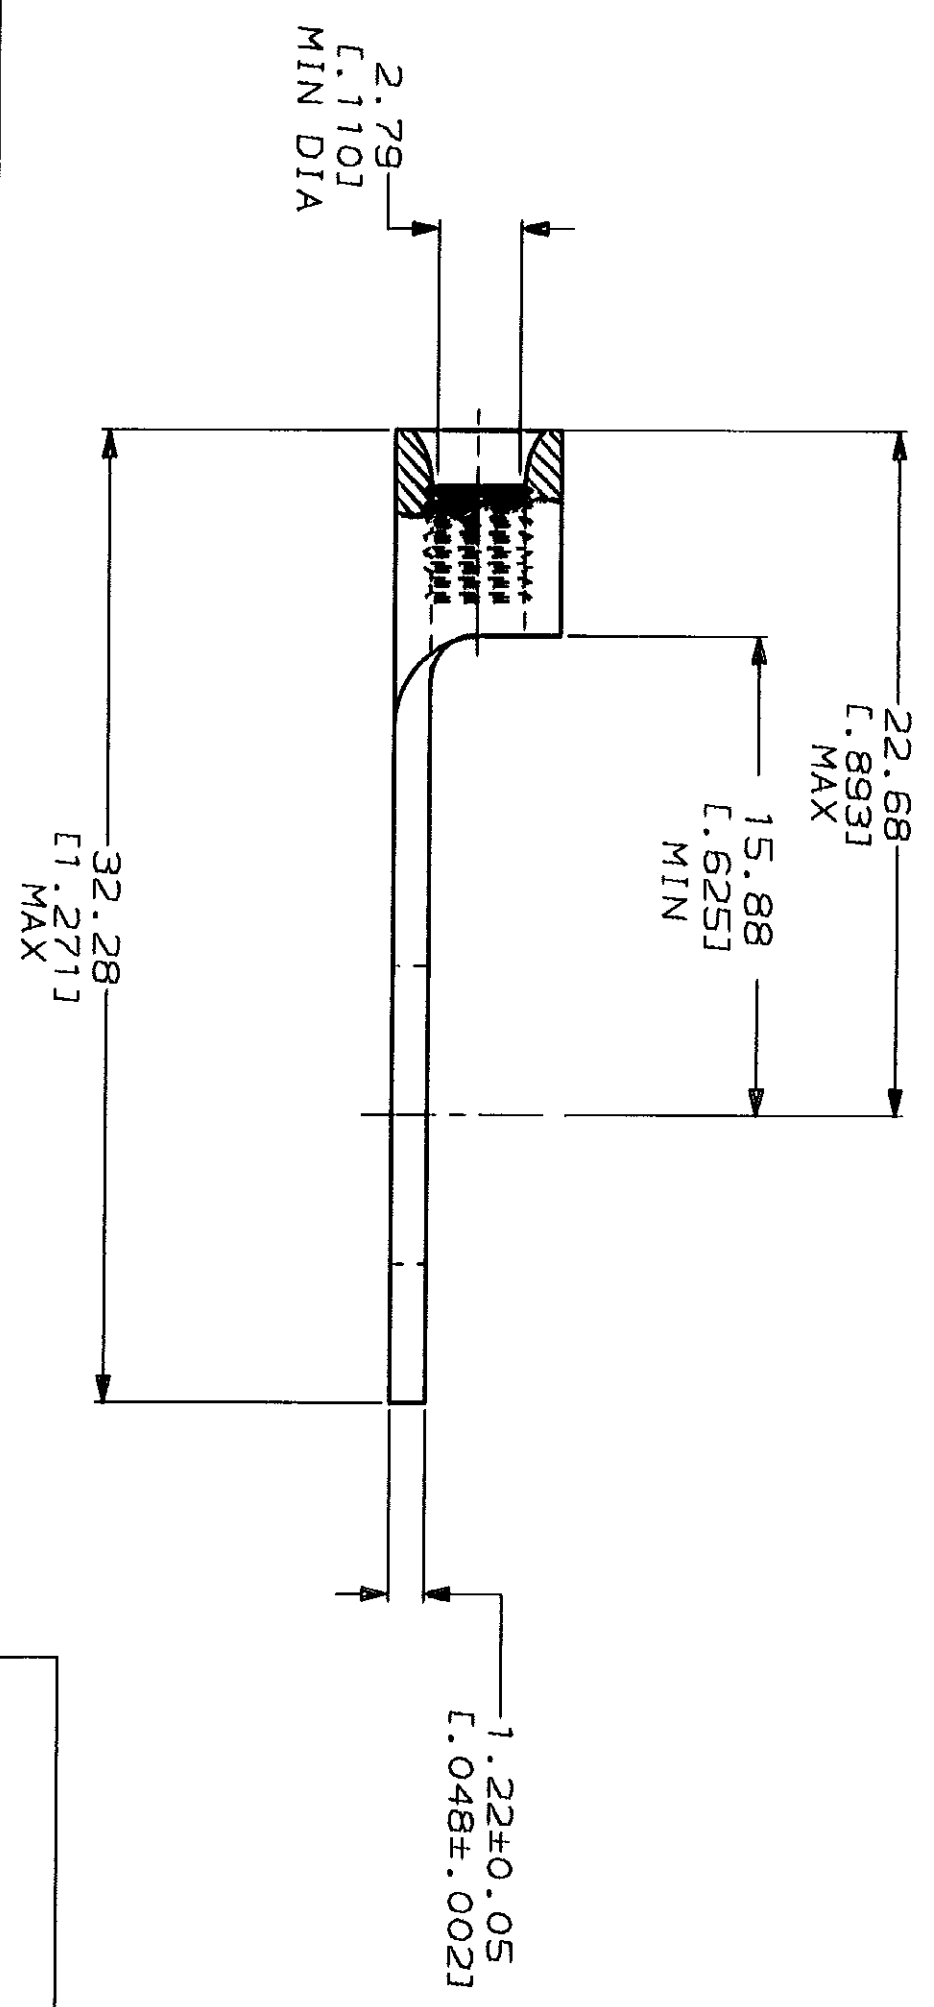

AMP INCORPORATED CUSTOMER SERVICE SYSTEMS		MAX RECOMMENDED OPERATING TEMPERATURE: 170°C MAX	
FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS 1-800-522-6752		VOLTAGE RATING: NOT APPLICABLE	
FOR APPLICATION TOOLING INFORMATION 1-800-722-1111		WIRE CROSS SECTIONAL AREA RANGE: 1.04-2.62mm² [2.050-5.180] CIR MILS STRANDED	
FOR ORDER ENTRY 1-800-526-5142		THIS DRAWING IS A CONTROLLED DOCUMENT FOR AND THE COMPANY IS SUBJECT TO CHANGE WITHOUT NOTICE. FOR THE LATEST REVISION, SHOULD BE CONTACTED FOR THE LATEST REVISION.	

DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN mm [INCHES] TOLERANCES ON: 2 PLC DEC ± 3 PLC DEC ± ANGLES		DR 2-1-93 TA BRINKMAN CHK 2-1-93 DA PATTERSON	NAME AMP AMP Incorporated Harrisburg, PA 17105-3608
MATERIAL COPPER PER ASTM B-152 ANNEALED		APPD 2-1-93 DE MILLER	
FINISH TIN PLATE 0.00254 [0.00100] MIN THK PER MIL-T-10727		APPD 2-1-93 JL MECKLEY	
APPLICATION SPEC		SIZE CAGE CODE 00779	DRAWING NO G-34830
WEIGHT		SCALE 4:1	SHEET 1 OF 1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[34830](#)