


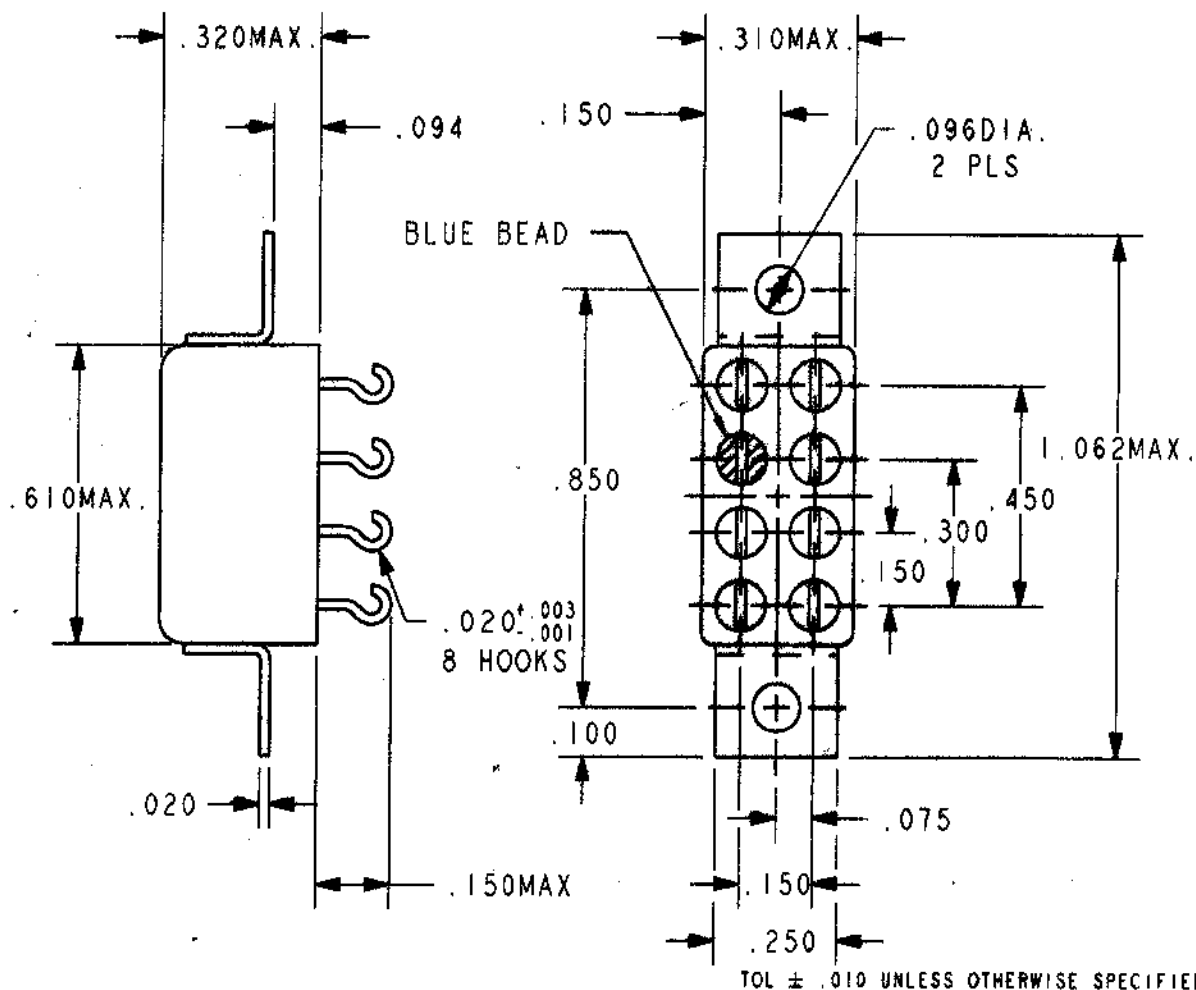

REV. 0

DCO 143268

COIL: @ 25°C

RESISTANCE 1350 OHMS ± 10%

NOMINAL VOLTAGE 26.5 VDC

MUST OPERATE 13.5 VDC

MUST RELEASE 8.1 VDC MAX, 1.5 VDC MIN.

ENVIRONMENT:

VIBRATION 10 CPS TO 3000 CPS @ 30 g's


SHOCK 75 g's 6 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE & RELEASE 4 MS MAX.

BOUNCE 2 MS MAX.

CUSTOMER DATA SHEET



TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO

2 AMPS 28 VDC RESISTIVE

50,000 OPERATIONS

DR. BSH 10/17/01

CK. TLA 10-18-01

CII Technologies
advanced control electronic solutions

CUST. GPL

CUST. NO. M39016/13-066L REV.

"3SBC" RELAY

3SBC1512A2

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[3SBC1512A2](#)