
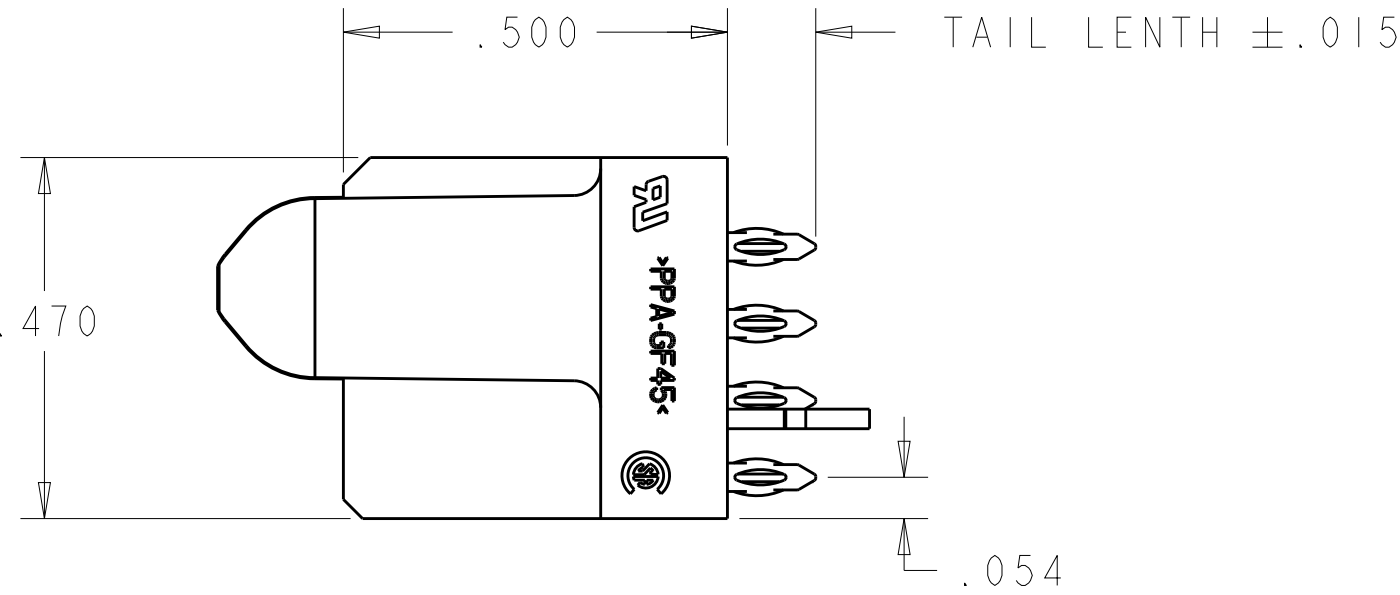
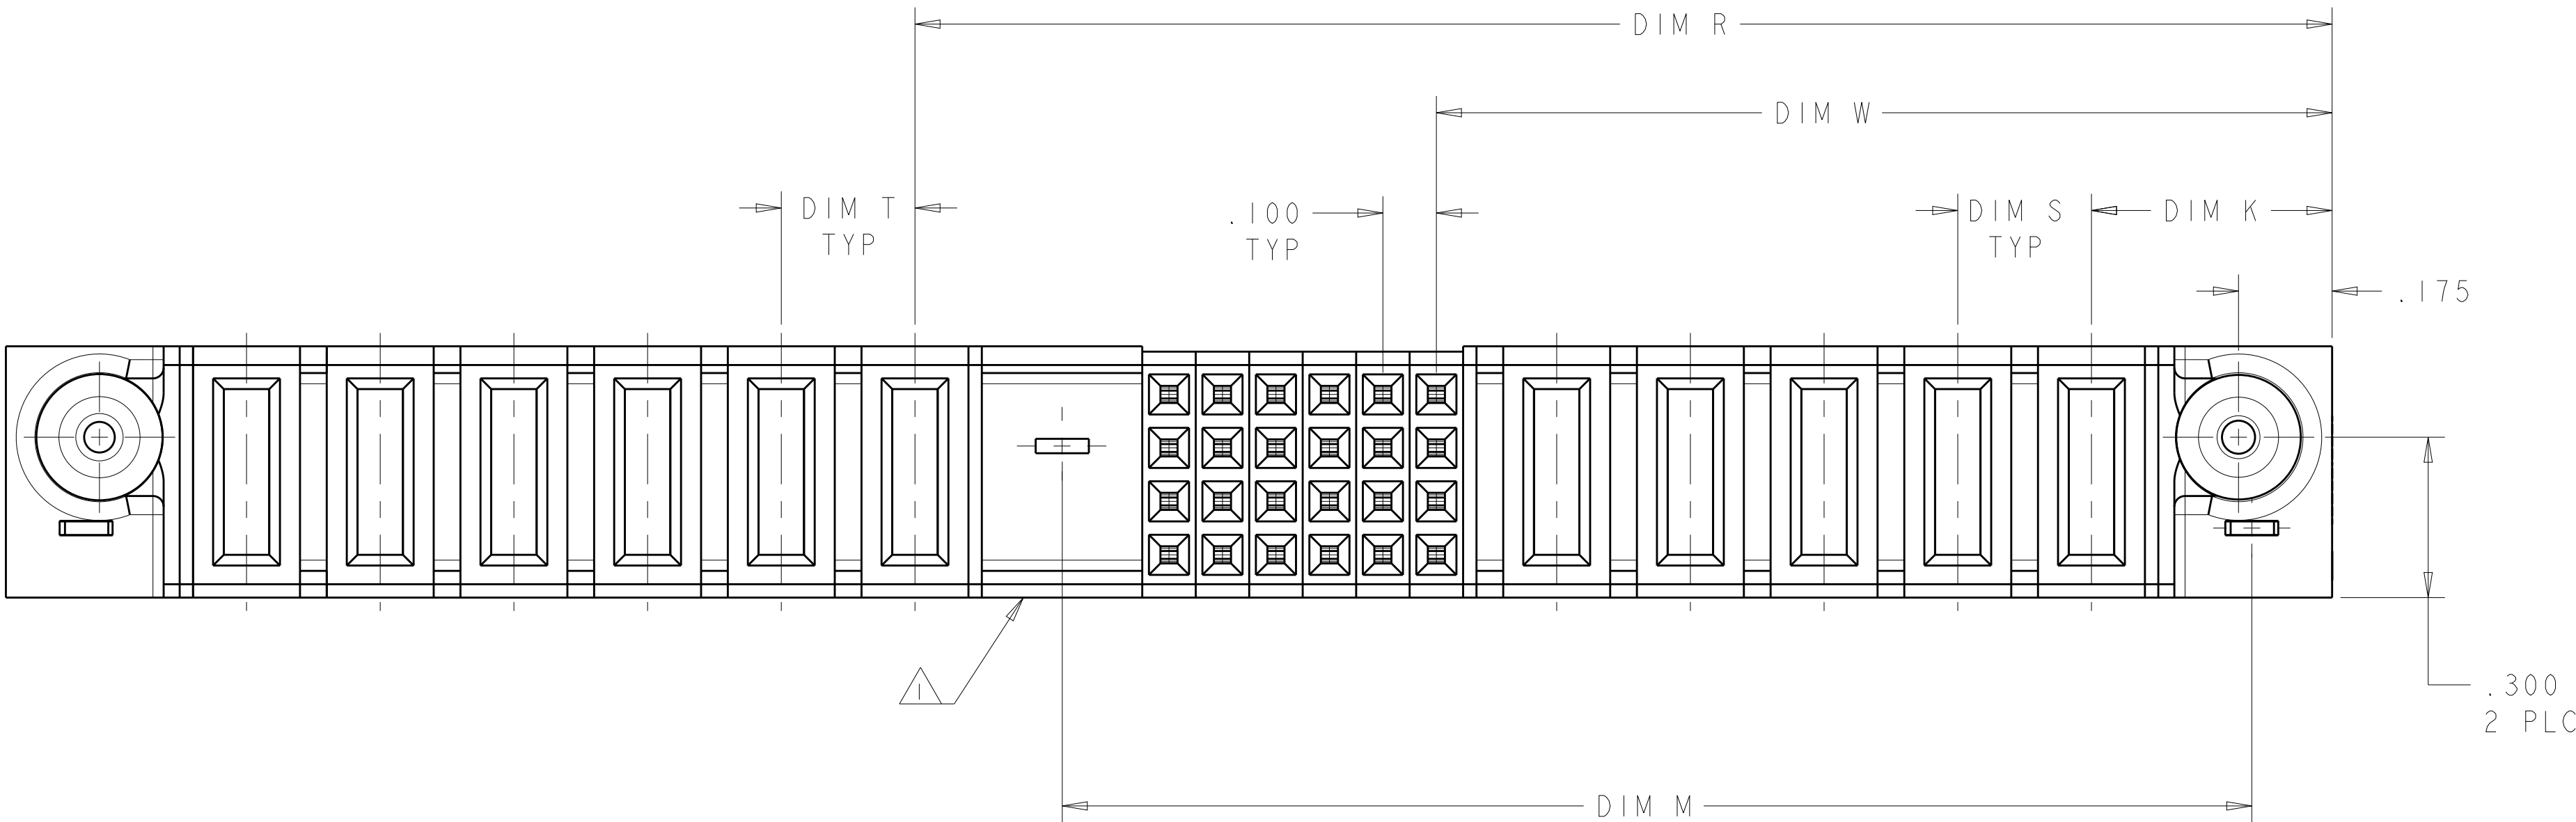
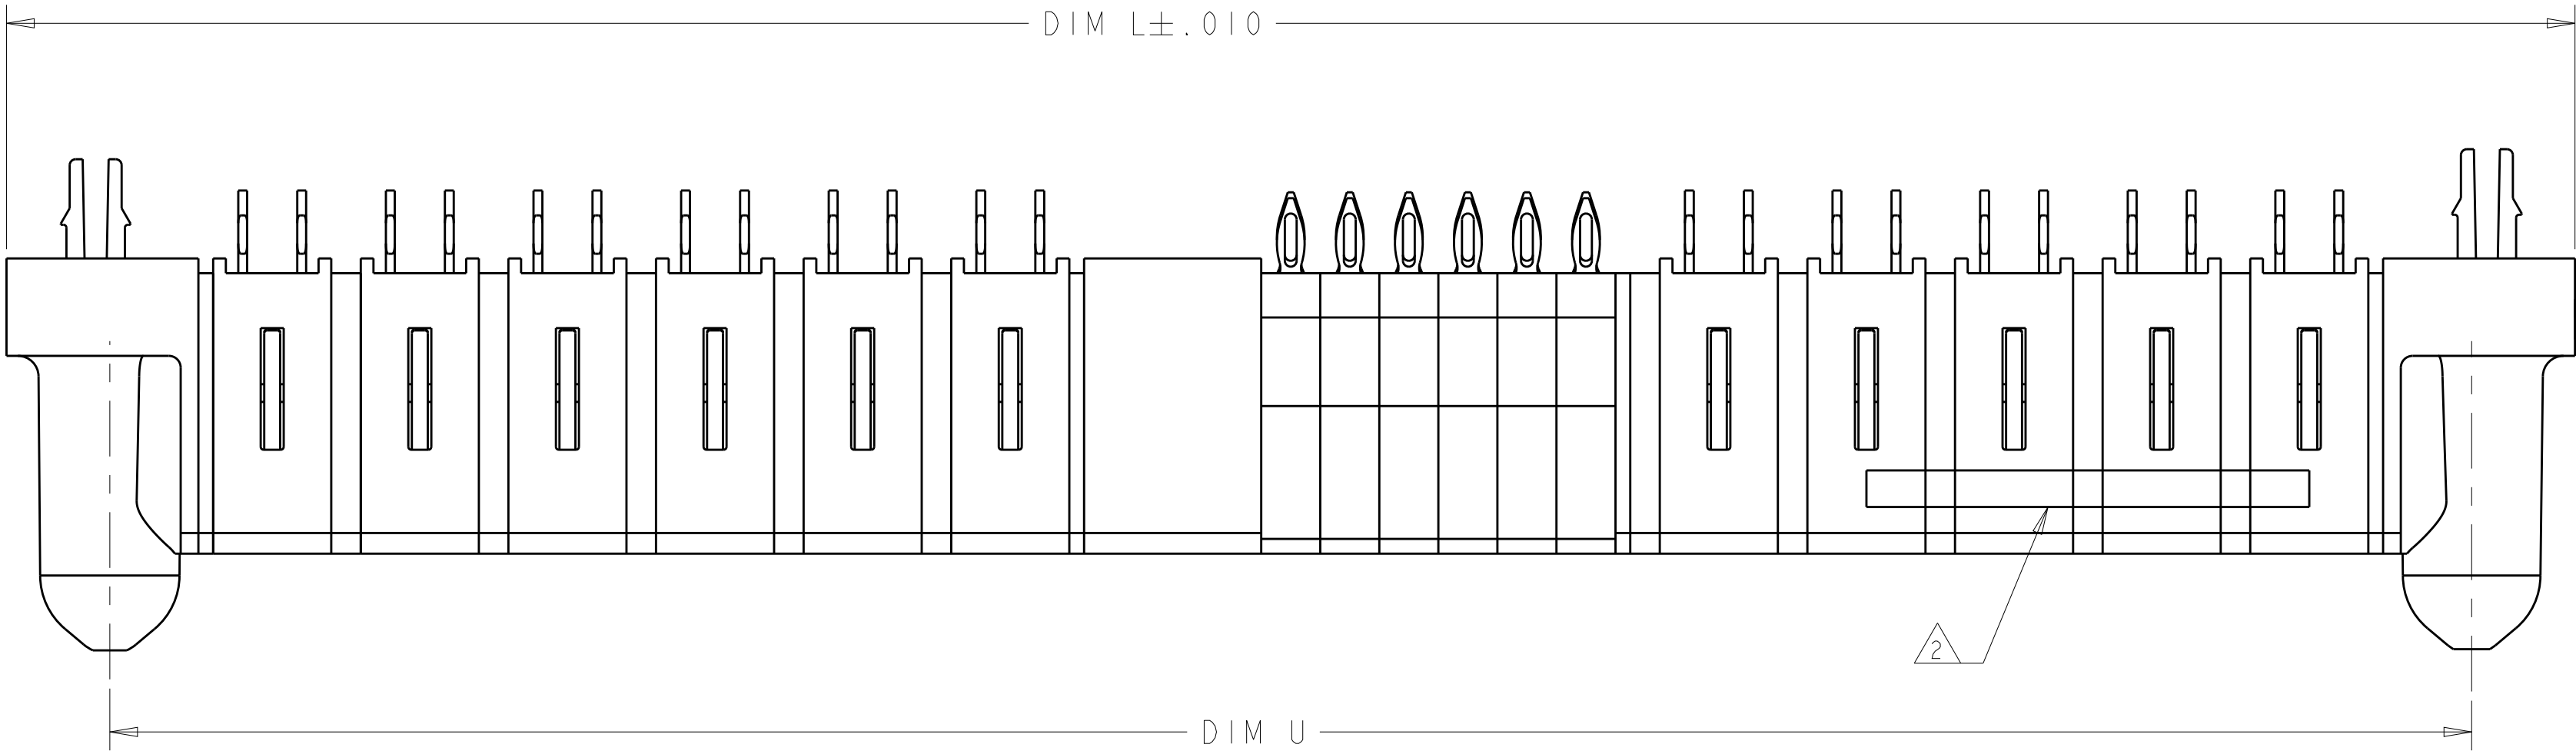


LOC		DIST		REVISIONS				
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD	
		K9		REV PER ECR-12-018831	30OCT2012	AY	SZ	

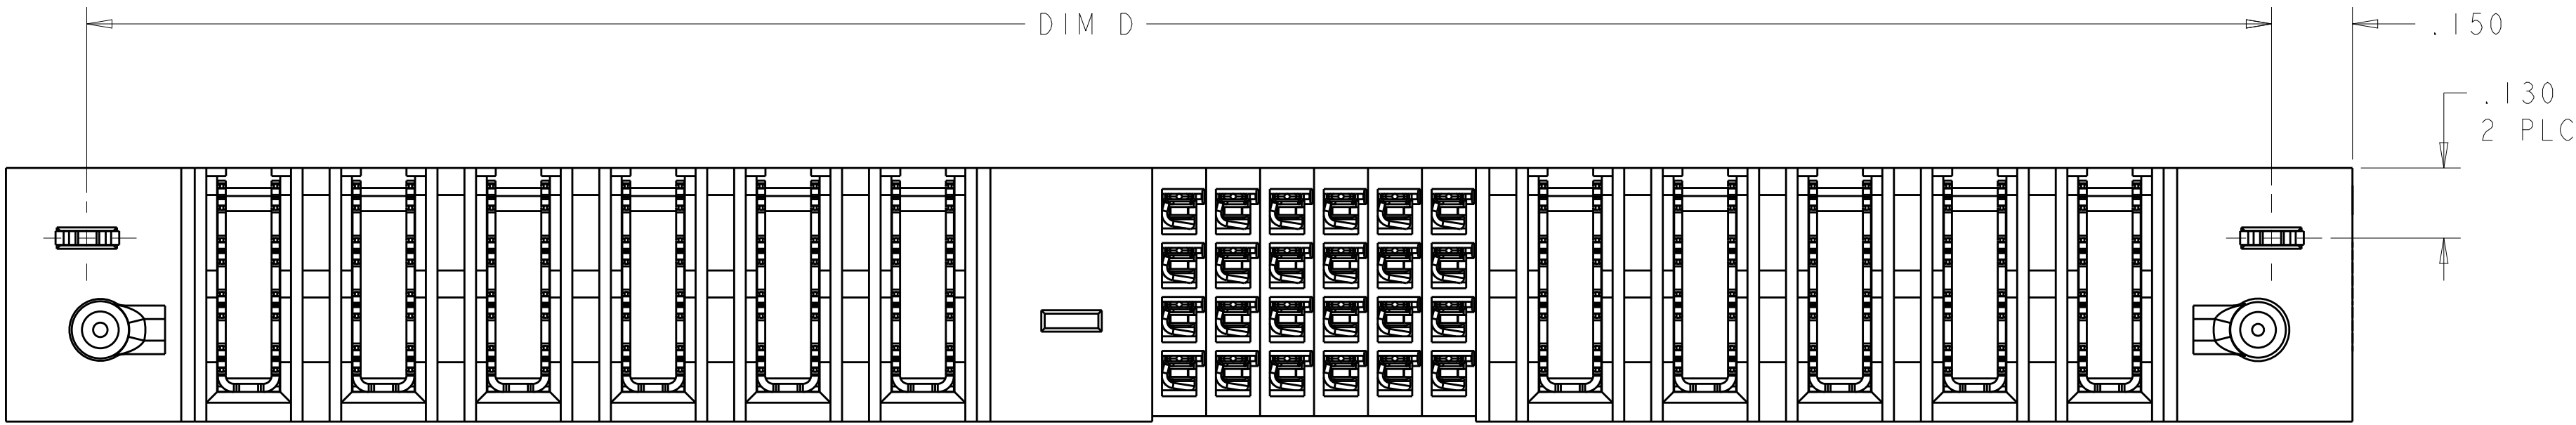

- 1
- OPTIONAL CENTER MODULE, WITH Ø.150 THRU HOLE OR HOLD DOWN FEATURE
- 2
- "AMP", PART NUMBER AND DATE CODE TO BE MARKED IN AREA SHOWN
PARTS UNDER 2.00 LONG MAY BE MARKED ON BOTH SIDES
- 3
- MATERIAL: HOUSING - GLASS FILLED HIGH TEMP THERMO PLASTIC, UL94 V-O
SIGNAL CONTACT - HIGH CONDUCTIVITY COPPER ALLOY
POWER CONTACT - HIGH CONDUCTIVITY COPPER ALLOY
- 4
- CONTACT PLATING: NOBLE METAL PLATING ON CONTACT FUNCTIONAL AREA
OF POWER CONTACTS AND SIGNAL CONTACTS.
- 5
- MECHANICAL CONNECTOR KEEP OUT ZONE
- 6
- DATUM AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER
- 7
- PCB - ALL HOLE DIAMETERS ARE FINISHED HOLE SIZES
- 8
- PCB - 0.0453 ±.0010 DRILLED HOLES PLATED WITH .0003 MIN Sn
OVER .001 TO .003 Cu PLATING TO ACHIEVE A .040 HOLE
- 9
- VARAIBLE DIMENSION SHOWN VIEW (SHEET 6)


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R.GRZYBOWSKI 29APR05	TE Connectivity	NAME	
		CHK M.PERCHERKE 29APR05			
DIMENSIONS:		APVD M.PERCHERKE	PRODUCT SPEC	APPLICATION SPEC	
INCHES					
		0 PLC ±"	108-1973	114-13038	
		1 PLC ±.01			
		2 PLC ±.01			
		3 PLC ±.005			
		4 PLC ±.0020	WEIGHT	CUSTOMER DRAWING	
		ANGLES ±.0020			
		FINISH	SCALE 2:1	SHEET 1 OF 19	
			REV K9		

LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-	-	SEE SHEET 1	-	-	-

K9	1.350	1.300	-	-	1.200	.625	-	1.650	.450	1P + 20S + 1P	6-6450540-6
	2.550	2.500	.250	.250	1.650	1.375	-	2.85	.450	4P + 8S + 4P	6-6450540-5
	1.350	1.300	-	-	1.200	.625	-	1.650	.450	1P + 20S + 1P	6-6450540-2
	-	3.300	.200	.200	2.200	1.625	-	3.650	.450	6P + 20S + 6P	6-6450540-1
	2.950	2.900	.250	.250	2.050	1.375	-	3.250	.450	4P + 24S + 4P	6-6450540-0
	2.050	2.000	.250	.250	1.650	.925	-	2.350	.450	2P + 24S + 2P	5-6450540-9
	2.050	2.000	.250	.250	1.400	1.125	-	2.350	.450	3P + 8S + 3P	5-6450540-5
	2.500	2.450	.250	.250	1.850	1.375	-	2.800	.450	4P + 16S + 3P	5-6450540-4
	2.950	2.900	.250	.250	2.050	1.375	-	3.250	.450	4P + 24S + 4P	5-6450540-3
	1.350	1.300	-	-	1.200	.675	-	1.650	.450	1P + 16S + 1P	5-6450540-2
	1.750	1.700	.250	.250	1.350	.875	-	2.050	.450	2P + 16S + 2P	5-6450540-1
	5.950	5.900	.250	.250	3.550	2.8750	-	6.250	.450	10P + 24S + 10P	5-6450540-0
	5.150	5.100	.250	.250	3.250	2.375	-	5.450	.450	8P + 32S + 8P	4-6450540-9
	1.250	1.200	-	-	1.100	.625	-	1.550	.450	1P + 16S + 1P	4-6450540-8
	2.150	2.100	.250	.250	1.500	1.175	-	2.450	.450	3P + 8S + 3P	4-6450540-7
	1.150	1.100	-	-	1.000	.675	-	1.450	.450	1P + 8S + 1P	4-6450540-6
	-	-	-	.200	-	-	-	2.820	.450	12HDP	4-6450540-5
	-	-	.200	.200	2.600	1.625	-	3.970	.450	6HDP + 36S + 7HDP	4-6450540-4
	2.65	2.60	.250	.250	2.250	1.625	-	2.950	.450	5P + 20S + 2P	(E)4-6450540-3
	-	-	-	.200	-	-	-	2.620	.450	11HDP	(E)4-6450540-2
	-	-	.200	.200	2.600	1.625	-	3.770	.450	6P + 36S + 6P	4-6450540-1
	-	-	.200	.200	4.500	3.425	-	7.470	.450	15P + 40S + 15P	4-6450540-0
	-	-	.200	.200	-	-	-	7.470	-	15P + 40S + 15P	(D)3-6450540-9
	4.650	4.600	.250	.250	3.250	1.875	-	4.950	.450	6P + 52S + 6P	(D)2-6450540-7
	1.950	1.900	-	-	1.550	.875	-	2.250	.450	2P + 24S + 2P	(D)2-6450540-5
	2.450	2.400	.250	.250	1.800	1.125	-	2.750	.450	3P + 24S + 3P	(D)2-6450540-0
	-	1.575	-	-	1.425	.700	-	1.925	.475	1P + 24S + 1P	(E)1-6450540-8
	-	5.450			3.075	2.425	-	5.800	.425	10P + 24S + 12P	1-6450540-4
	3.250	3.200	.200	.200	2.125	1.575	-	3.550	.425	6P + 20S + 6P	1-6450540-2
	-	2.850	.250	.250	2.000	1.125	-	3.200	.450	3P + 32S + 4P	1-6450540-1
	1.950	1.900	.250	.250	1.550	.875	-	2.250	.450	2P + 24S + 2P	1-6450540-0
	-	1.400	.250	.250	1.300	.625	-	1.750	.450	1P + 24S + 1P	6450540-7
	-	2.400	.250	.250	2.050	1.375	-	2.750	.450	4P + 24S + 2P	6450540-6
	-	3.100	.250	.250	2.000	1.625	-	3.450	.450	5P + 12S + 5P	6450540-5
	-	3.400	.250	.250	2.050	1.375	-	3.750	.450	4P + 24S + 6P	6450540-4
	-	7.400	.250	.250	5.050	2.875	-	7.750	.450	10P + 84S + 10P	6450540-3
	-	4.000	.250	.250	2.650	1.675	2.225	4.350	.450	5P+24S+1M+6P	6450540-2
	-	1.575	-	-	1.425	.700	-	1.925	.475	1P + 24S + 1P	6450540-1
	D	U	T	S	R	W	M	L	K	DESCRIPTION	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.
TOLERANCES UNLESS OTHERWISE SPECIFIED:

DIMENSIONS:
INCHES



MATERIAL

0 PLC ±.1
1 PLC ±.01
2 PLC ±.005
3 PLC ±.005
4 PLC ±.0020
ANGLES ±.2°
FINISH

0 PLC ±.1
1 PLC ±.01
2 PLC ±.005
3 PLC ±.005
4 PLC ±.0020
ANGLES ±.2°
FINISH

DWN
R. GRZYBOWSKI
CHK
M. PERCHERKE
APVD
M. PERCHERKE

29APR05
29APR05

PRODUCT SPEC
108-1973
APPLICATION SPEC
114-13038
WEIGHT
-

CUSTOMER DRAWING

NAME
VERTICAL RECEPTACLE ASSEMBLY
WITH GUIDES
MULTI-BEAM XL

SIZE
A1

CAGE CODE
100779

DRAWING NO
6450540

RESTRICTED TO
-

SCALE
2:1


SHEET
2

OF
19

REV
K9

ITE Connectivity

PART NUMBER	ROWS		POWER		SIGNAL							POWER			
			P4	P3	6	5	4	3	2	1	P2	P1			
2-6450540-5	D C B A				AP	AP	AP	AP	AP	AP	AP				
					AP	AP	AP	AP	AP	AP	AP				
					AP	AP	AP	AP	AP	AP	AP				
					AP	AP	AP	AP	AP	AP	AP				
2P + 24S + 2P															

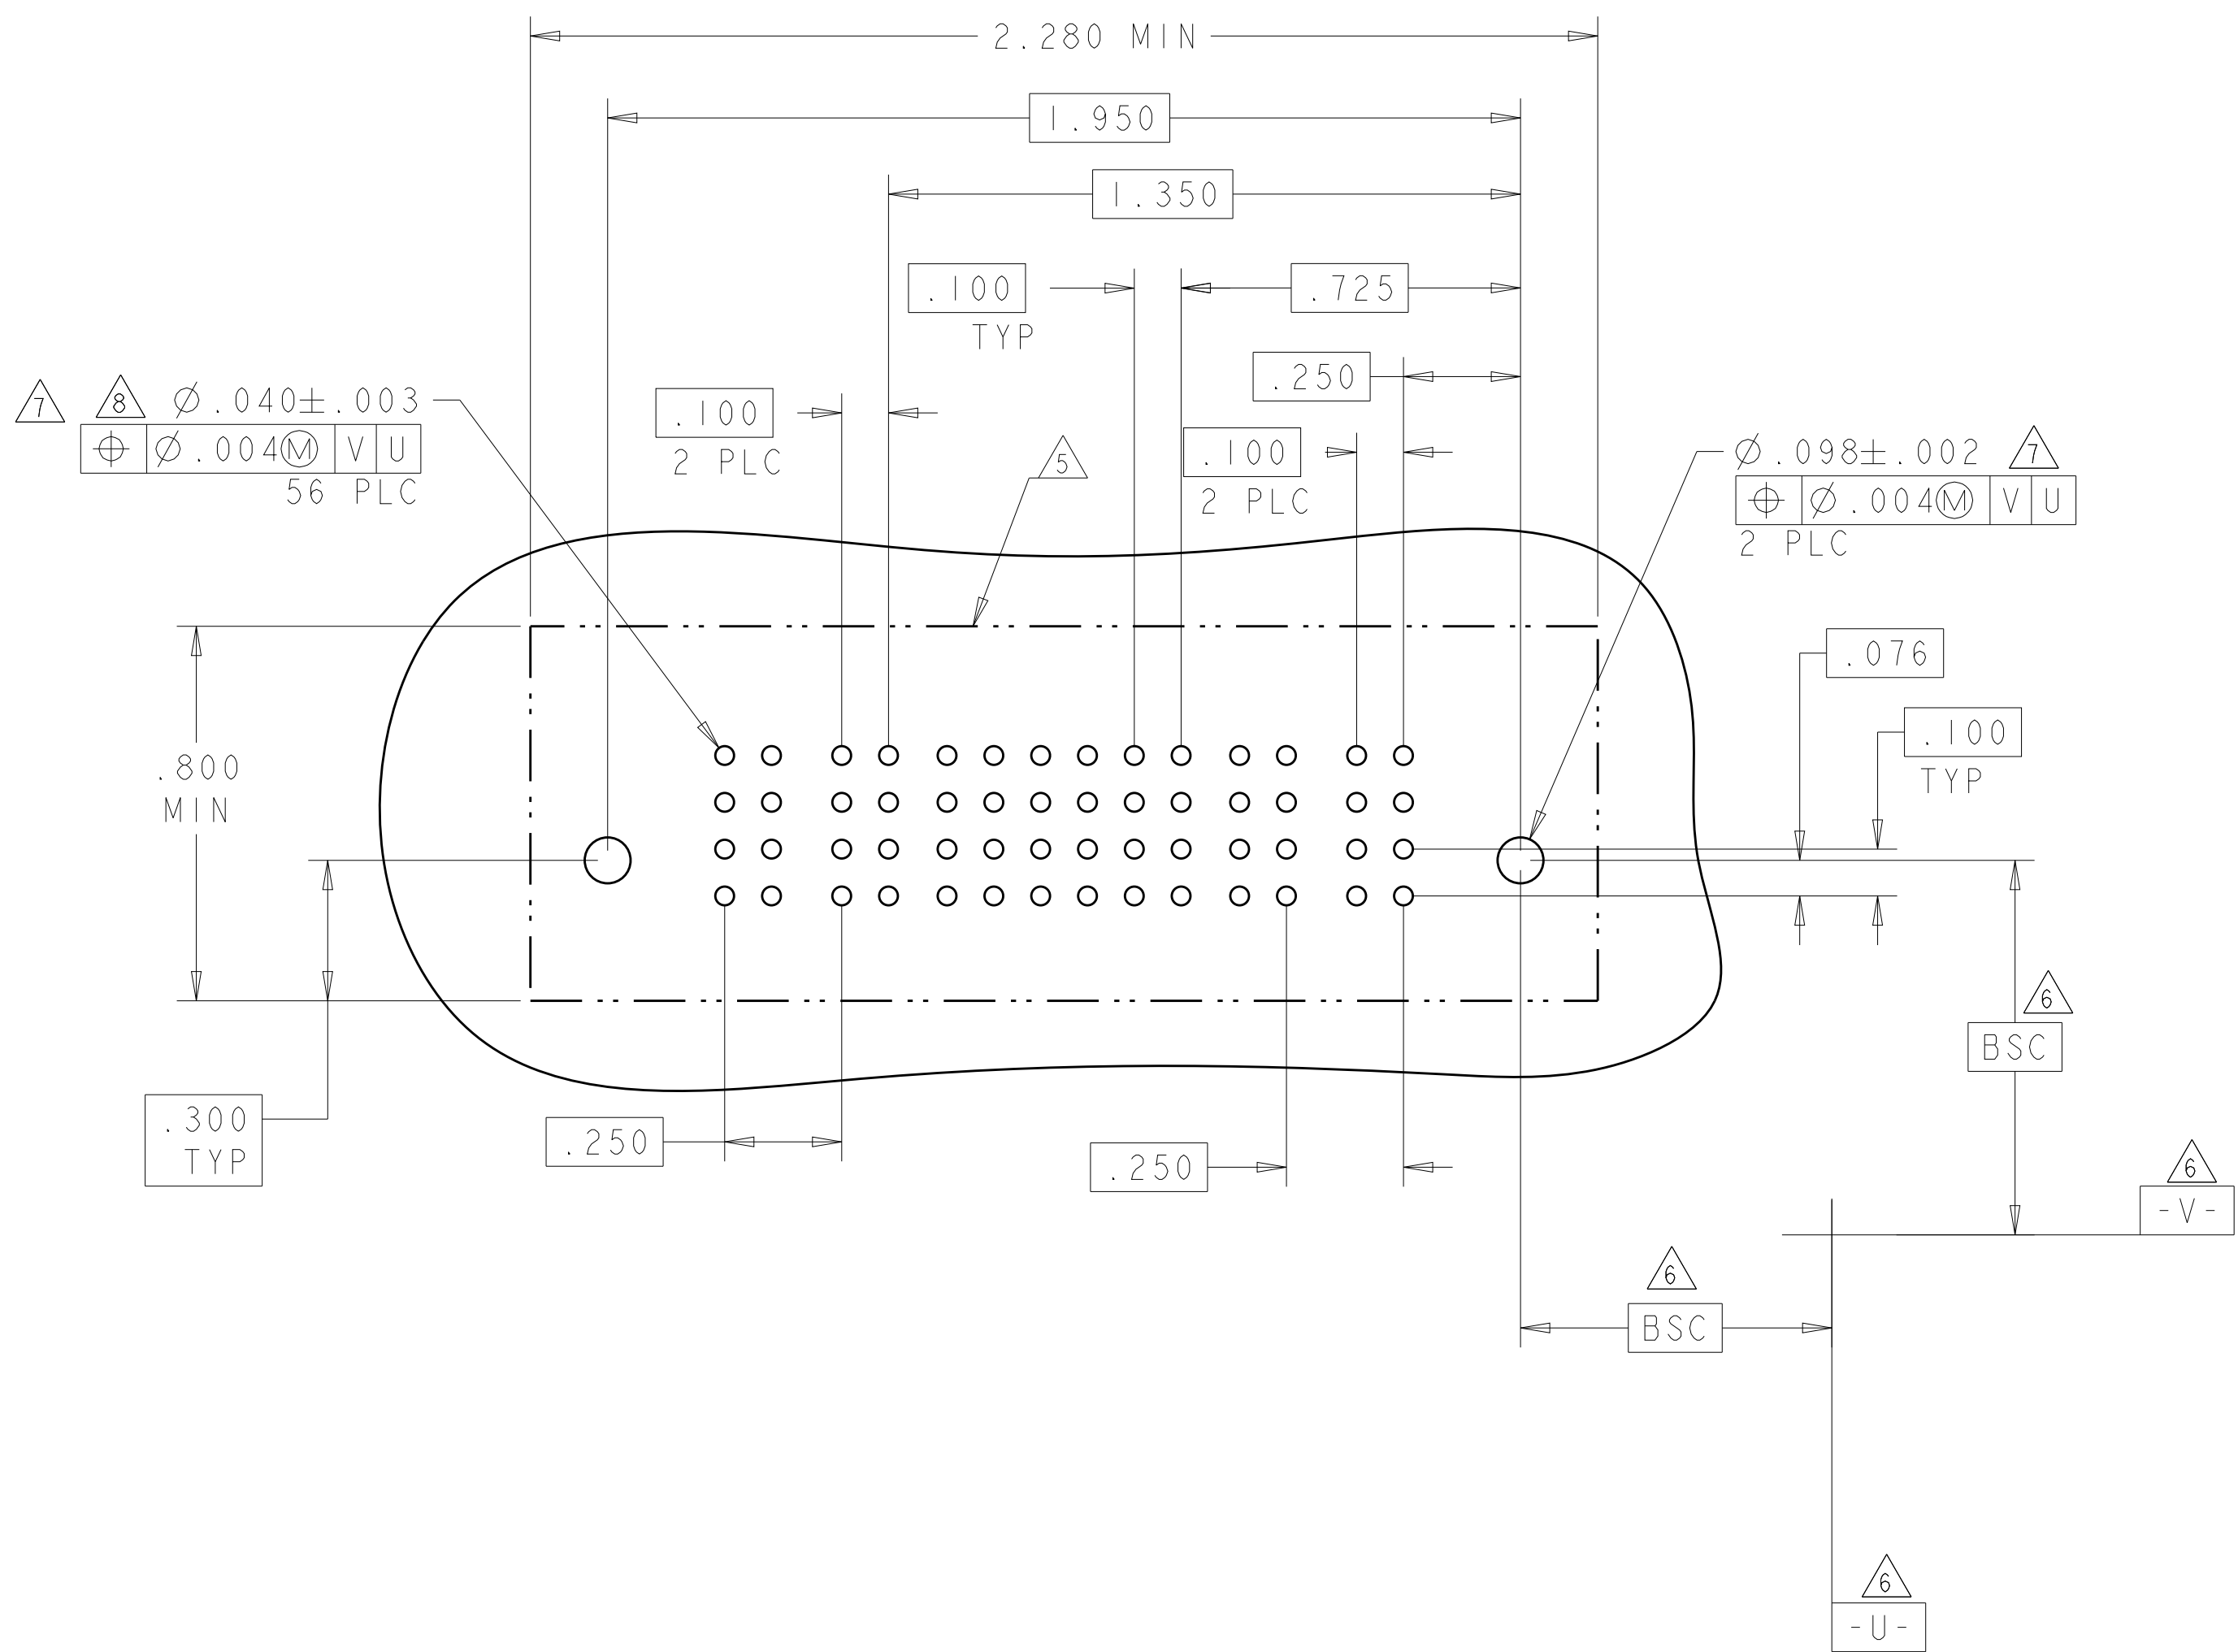

VS	STD POWER PRESSFIT CONTACT .115 LG
VP	MFBL POWER PRESSFIT CONTACT .115 LG
GS	STD POWER PRESSFIT CONTACT .135 LG
GP	MFBL POWER PRESSFIT CONTACT .135 LG
P	SIGNAL PRESSFIT CONTACT .115 LG
AP	SIGNAL PRESSFIT CONTACT .135 LG
CODE	TAIL LENGTH

4805 (3/11)



[illegible]

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R. GRZYBOWSKI 29APR05		 TE Connectivity	
		CHP M. PERCHERKE 29APR05			
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME VERTICAL RECEPTACLE ASSEMBLY WITH GUIDES MULTI-BEAM XL	
INCHES		APUD M. PERCHERKE -			
		PRODUCT SPEC			
		108-1973			
		APPLICATION SPEC			
		114-13038			
0 PLC ± 1 PLC ± 2 PLC ± 0.01 3 PLC ± 0.005 4 PLC ± 0.002 ANGLES ±7°		WEIGHT -		SIZE CASE CODE DRAWING NO RESTRICTED TO	
MATERIAL FINISH		A 100779 ©=6450540		-	
CUSTOMER DRAWING				SCALE 2:1 SHEET 4 of 19 REV K9	

LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-	-	SEE SHEET 1	-	-	-

PART NUMBER	ROWS		POWER						SIGNAL						POWER				
			P10	P9	P8	P7	P6	P5	6	5	4	3	2	1	P4	P3	P2	P1	
6450540-4	D C B A		GP	GP	GP	GP	GP	GP	AP	AP	AP	AP	AP	AP	GP	GP	GP	GP	
									AP	AP	AP	AP	AP	AP					
									AP	AP	AP	AP	AP	AP					
									AP	AP	AP	AP	AP	AP					
4P + 24S + 6P																			


PART NUMBER	ROWS		POWER					SIGNAL			POWER					
			P10	P9	P8	P7	P6	3	2	1	P5	P4	P3	P2	P1	
6450540-5	D C B A															
5P + 12S + 5P																


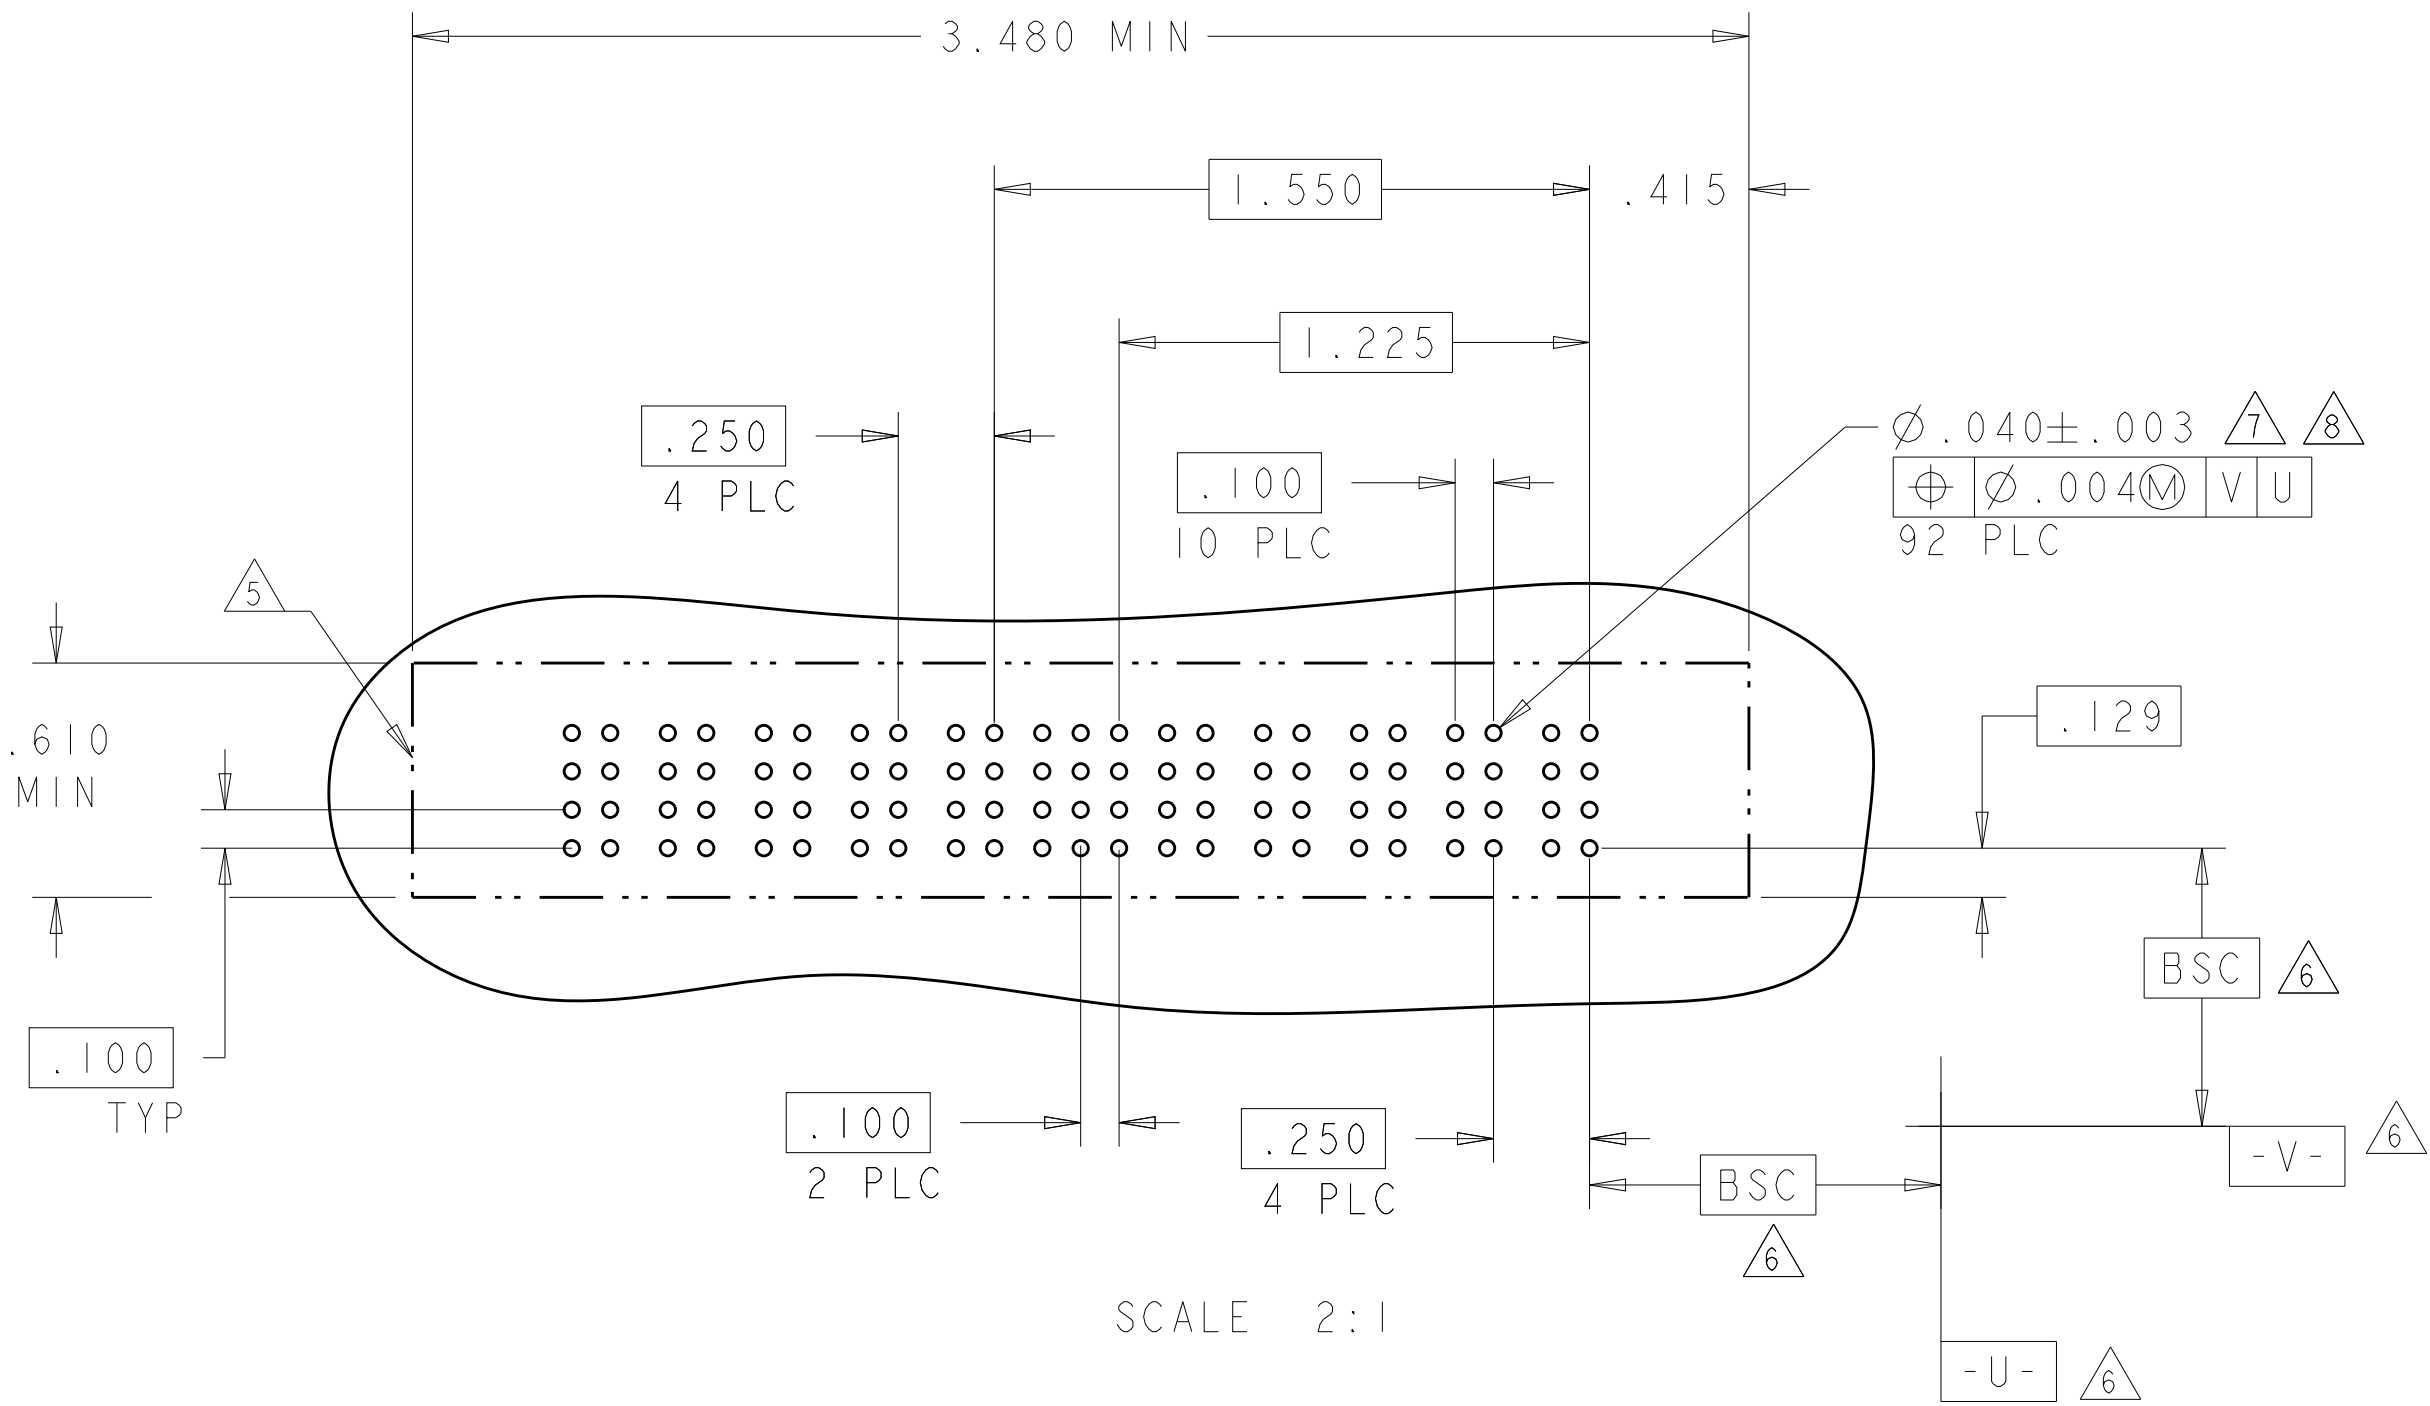
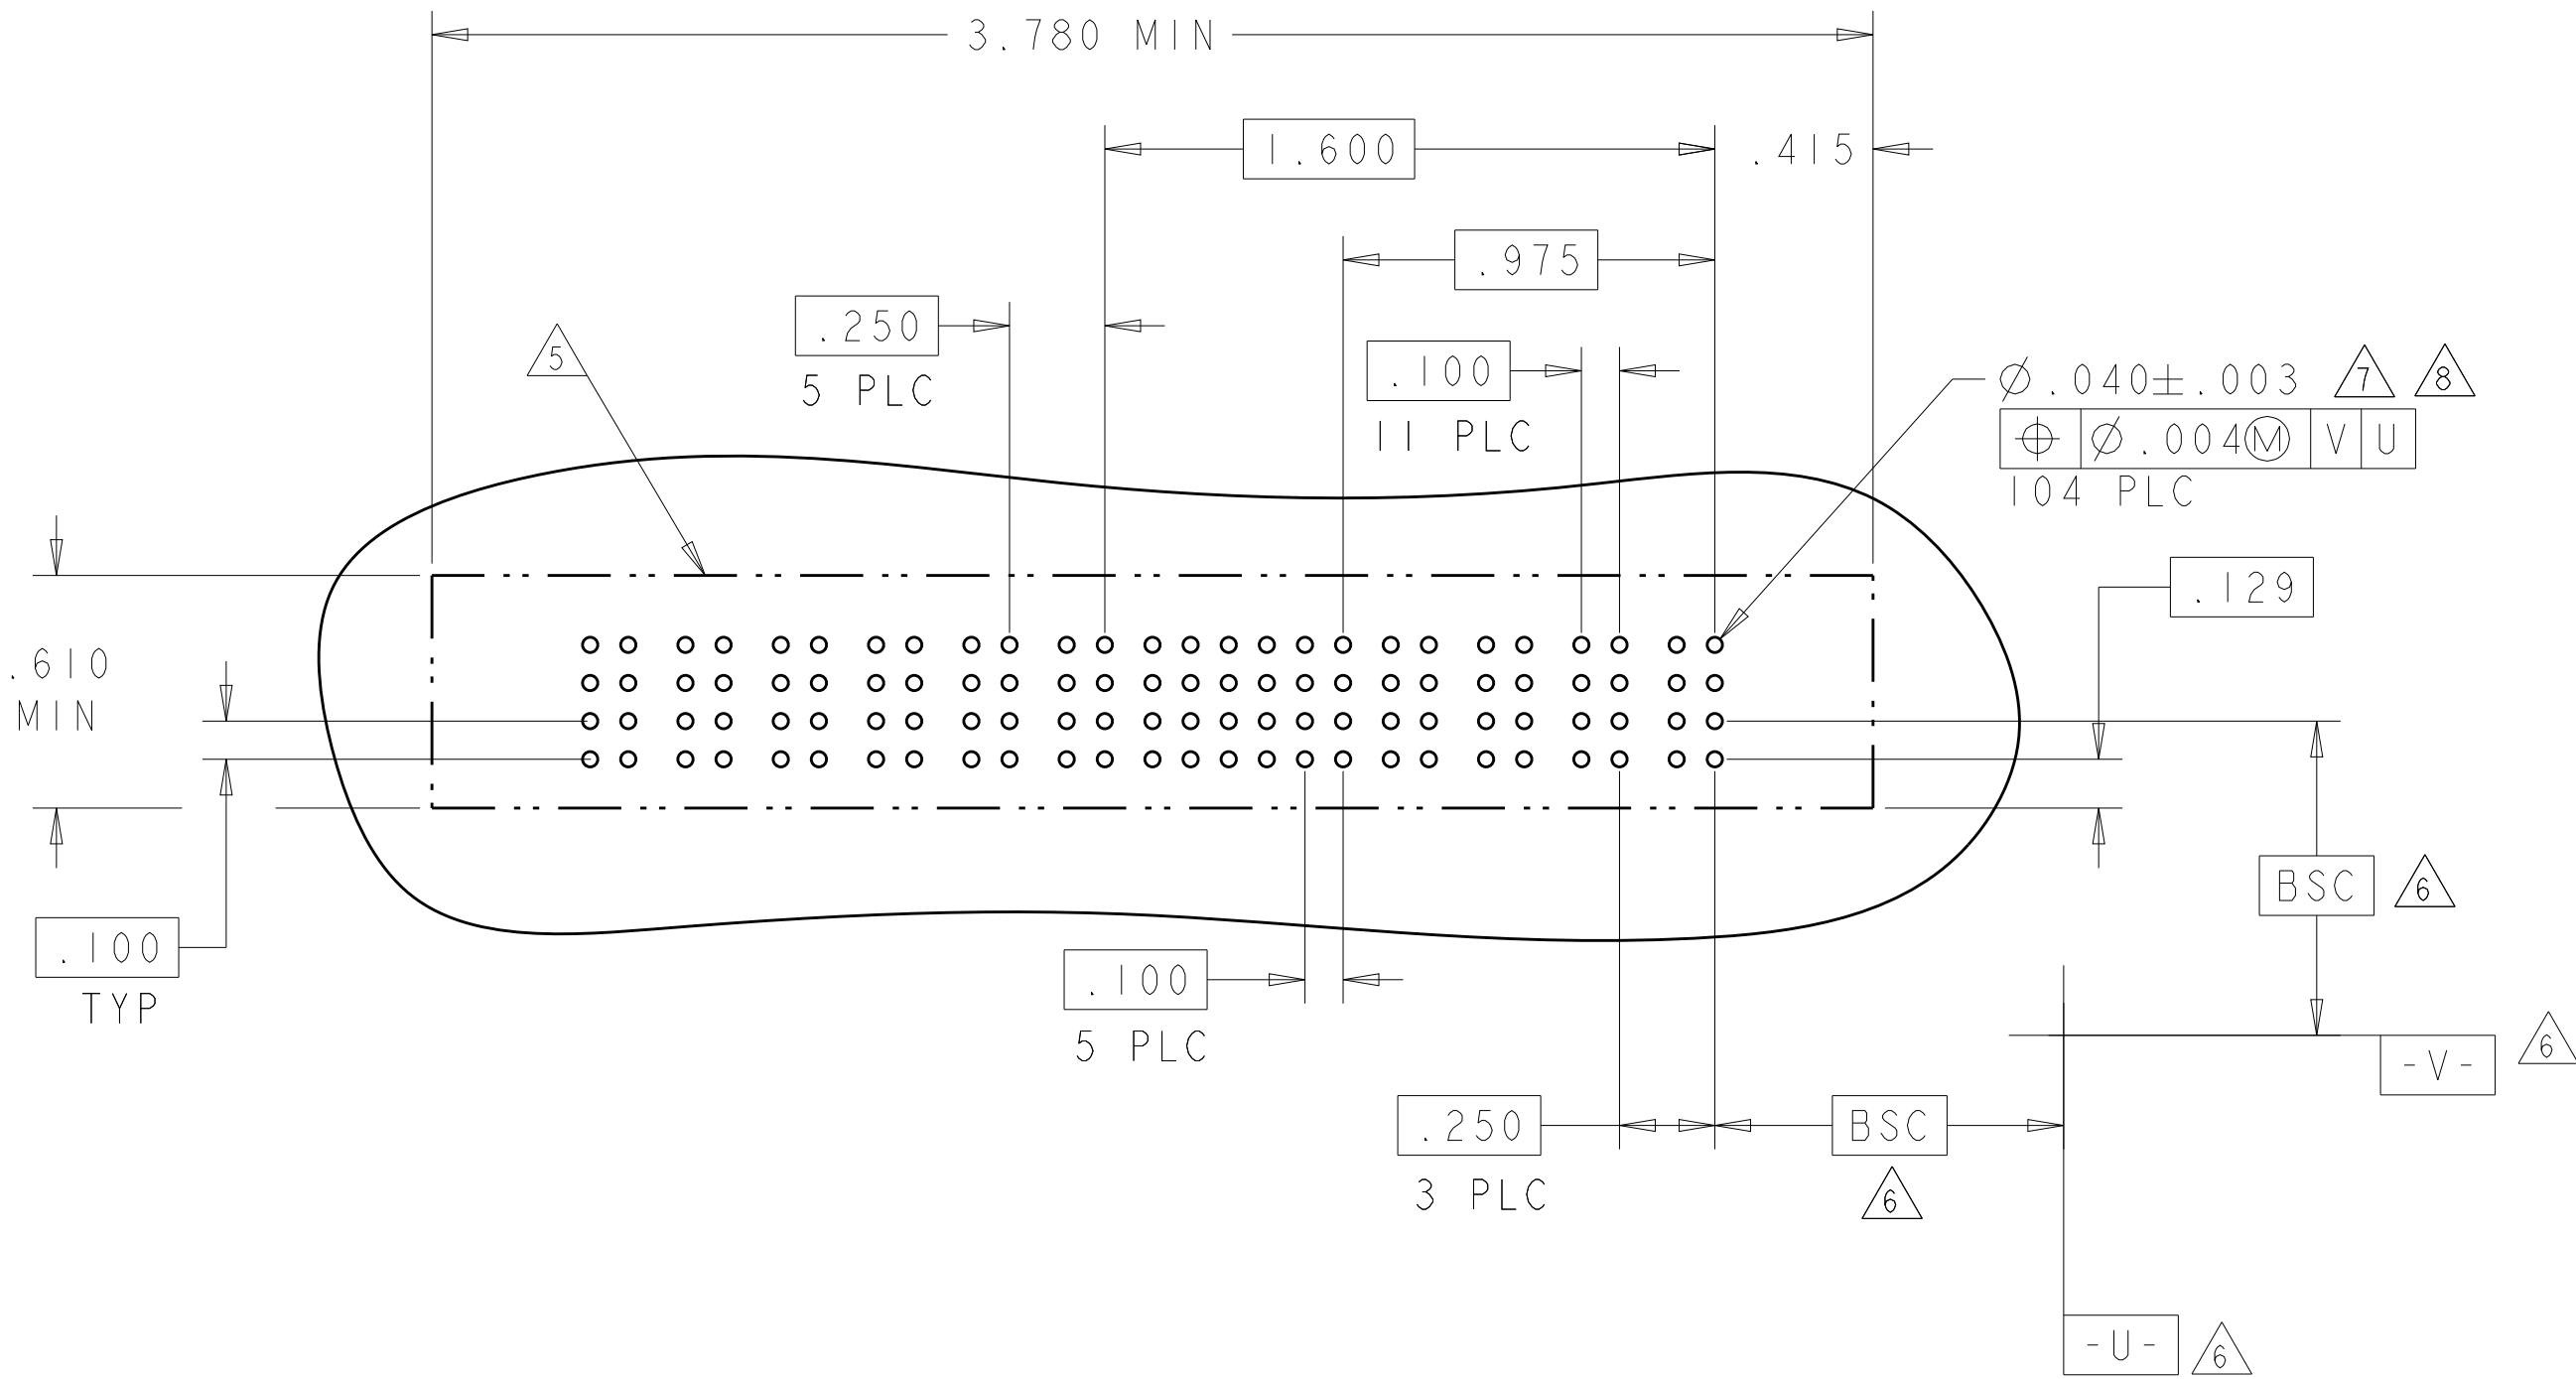



GP	MFBL POWER PRESSFIT CONTACT .135 LG
AP	SIGNAL PRESSFIT CONTACT .135 LG
CODE	TAIL LENGTH
CONTACT TABLE	


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R.GRZYBOWSKI 29APR05	NAME	
		CHK M.PERCHEKKE 29APR05		
DIMENSIONS:		APVD M.PERCHEKKE	PRODUCT SPEC	
INCHES				
		0 PLC ±"	APPLICATION SPEC	
		1 PLC ±.01		
		2 PLC ±.01	114-13038	
		3 PLC ±.005		
MATERIAL		4 PLC ±.0020	WEIGHT	
		ANGLES ±.0020		
		FINISH	CUSTOMER DRAWING	
			SCALE 2:1	
			SHEET 5 OF 19	
			REV K9	

PART NUMBER	ROWS		POWER	SIGNAL							POWER																																
			P2	6	5	4	3	2	1	P1																																	
6450540-7	D C B A		<table><tr><td rowspan="4">GP</td><td>AP</td><td>AP</td><td>AP</td><td>AP</td><td>AP</td><td>AP</td><td>AP</td><td rowspan="4">GP</td></tr><tr><td>AP</td><td>AP</td><td>AP</td><td>AP</td><td>AP</td><td>AP</td><td>AP</td></tr><tr><td>AP</td><td>AP</td><td>AP</td><td>AP</td><td>AP</td><td>AP</td><td>AP</td></tr><tr><td>AP</td><td>AP</td><td>AP</td><td>AP</td><td>AP</td><td>AP</td><td>AP</td></tr></table>										GP	AP	AP	AP	AP	AP	AP	AP	GP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	
GP	AP	AP	AP	AP	AP	AP	AP	GP																																			
	AP	AP	AP	AP	AP	AP	AP																																				
	AP	AP	AP	AP	AP	AP	AP																																				
	AP	AP	AP	AP	AP	AP	AP																																				
IP + 24S + IP																																											

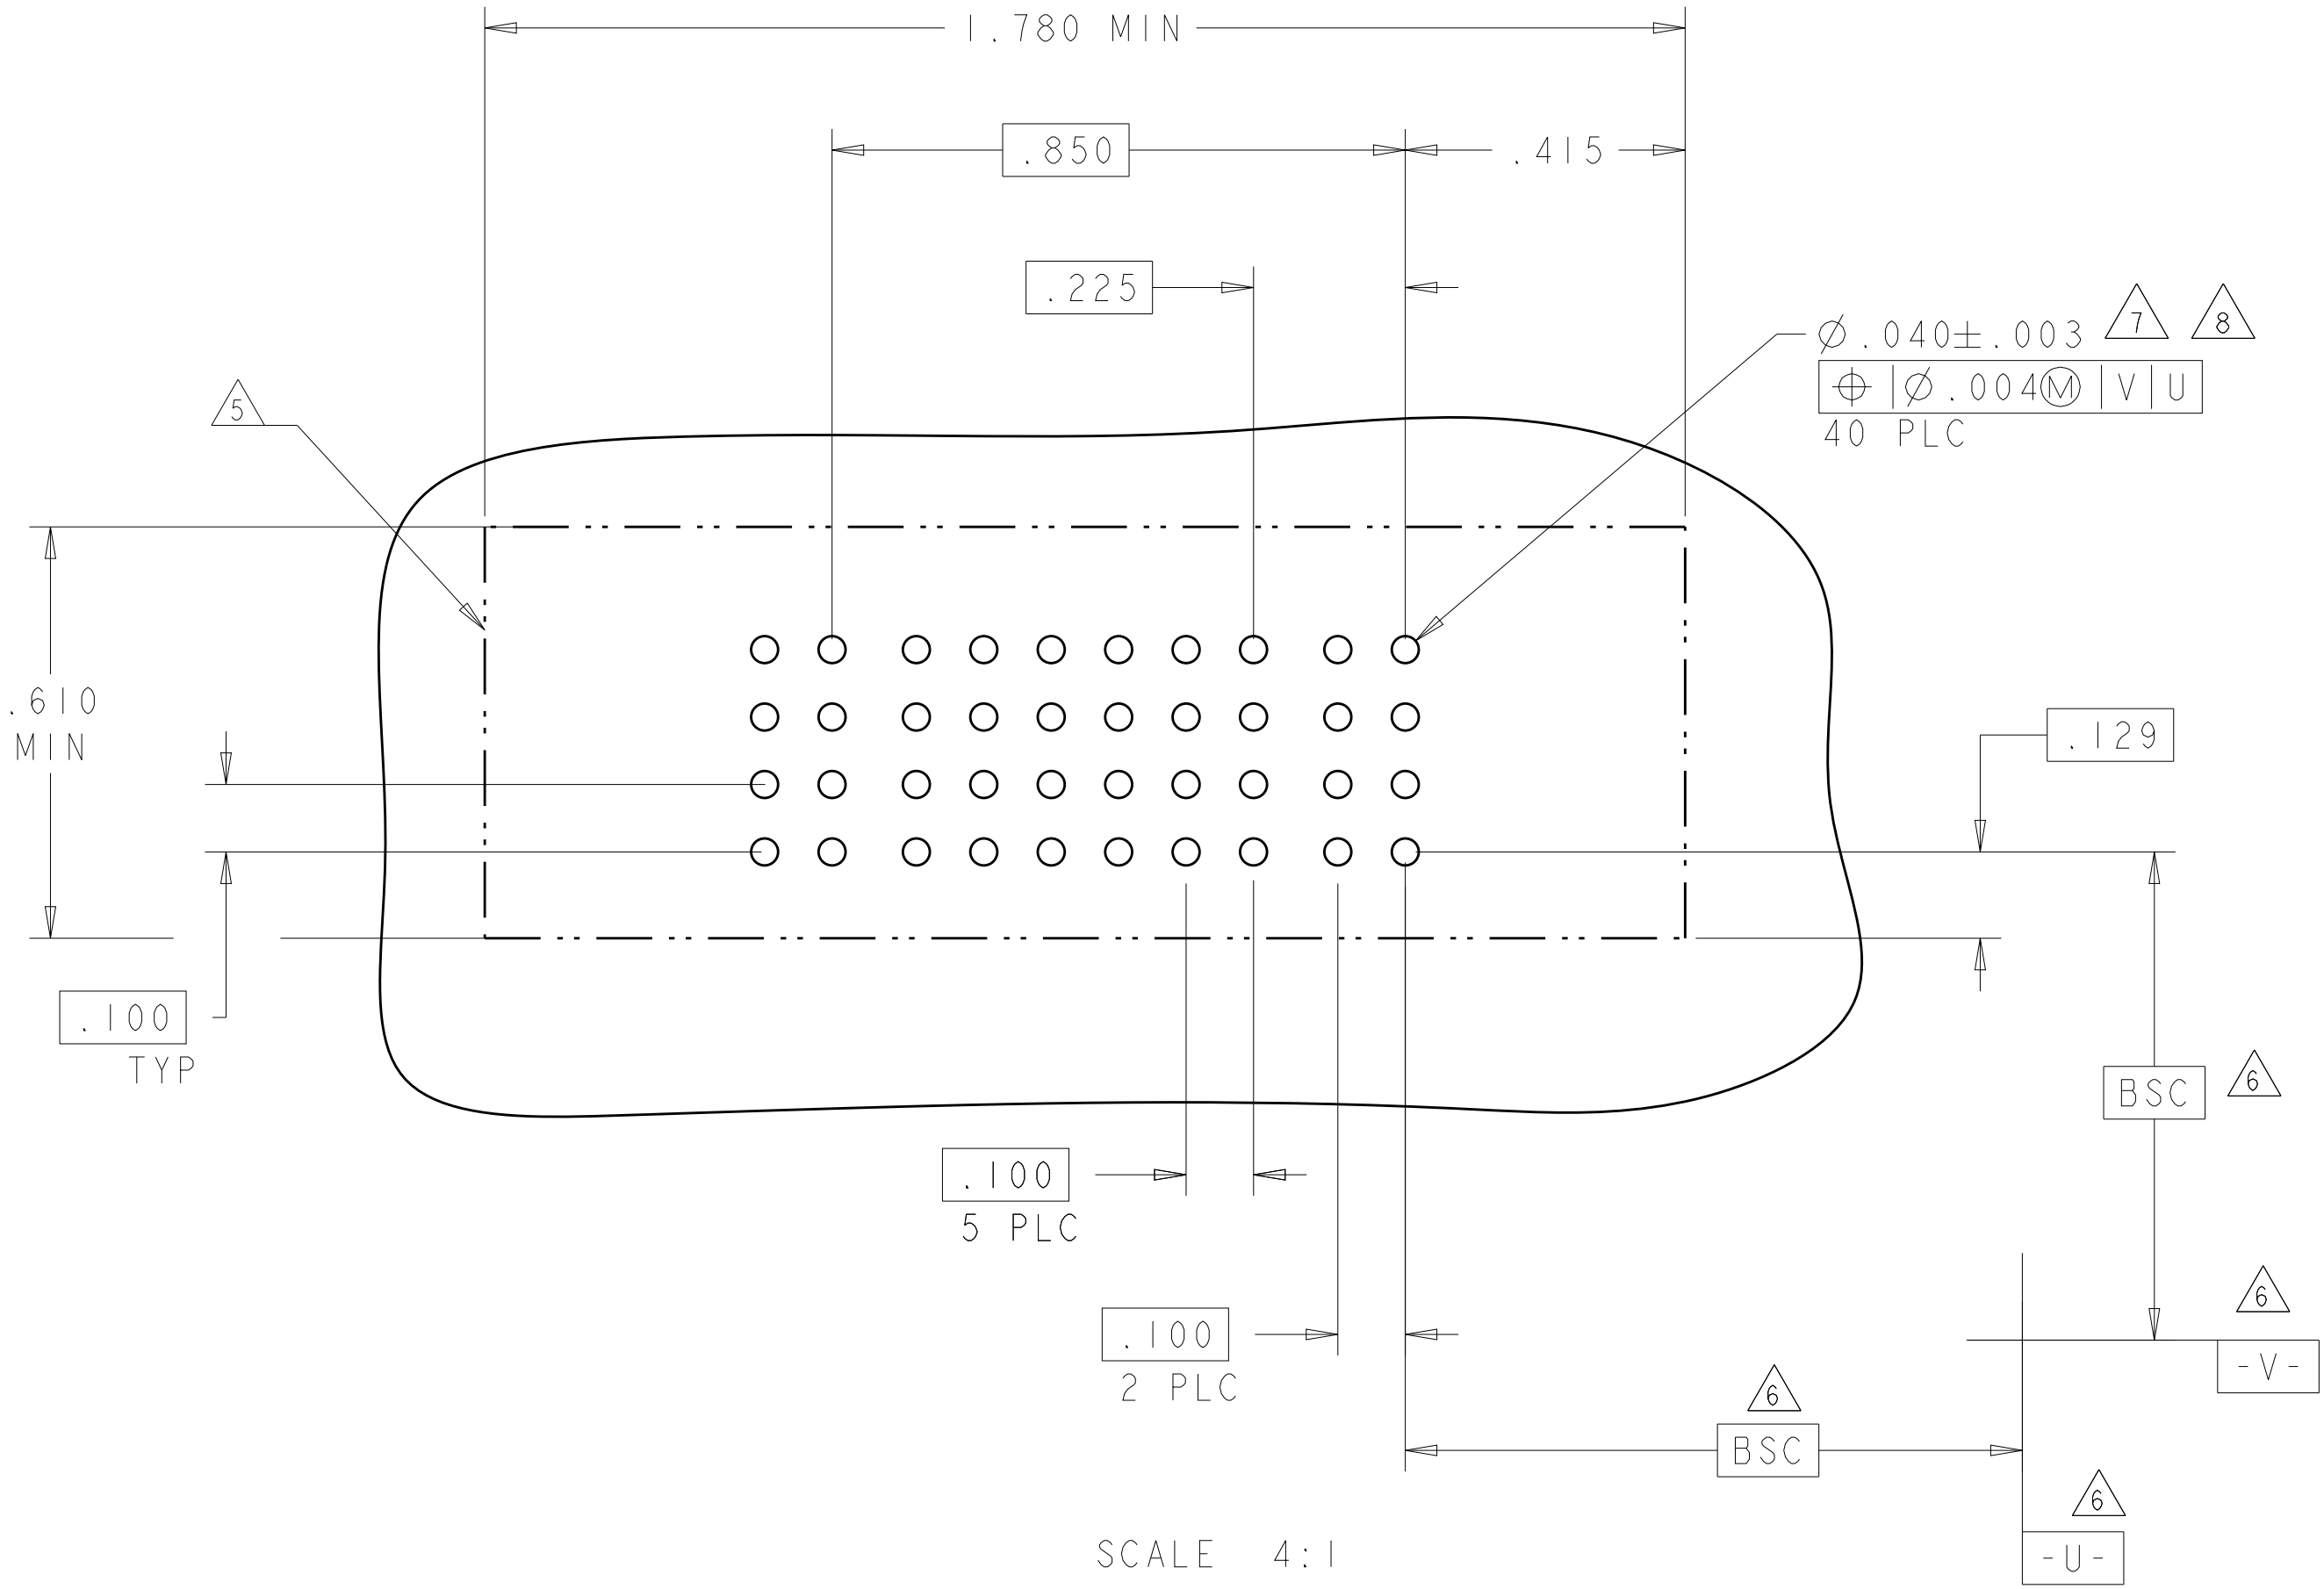4805 (3/11)

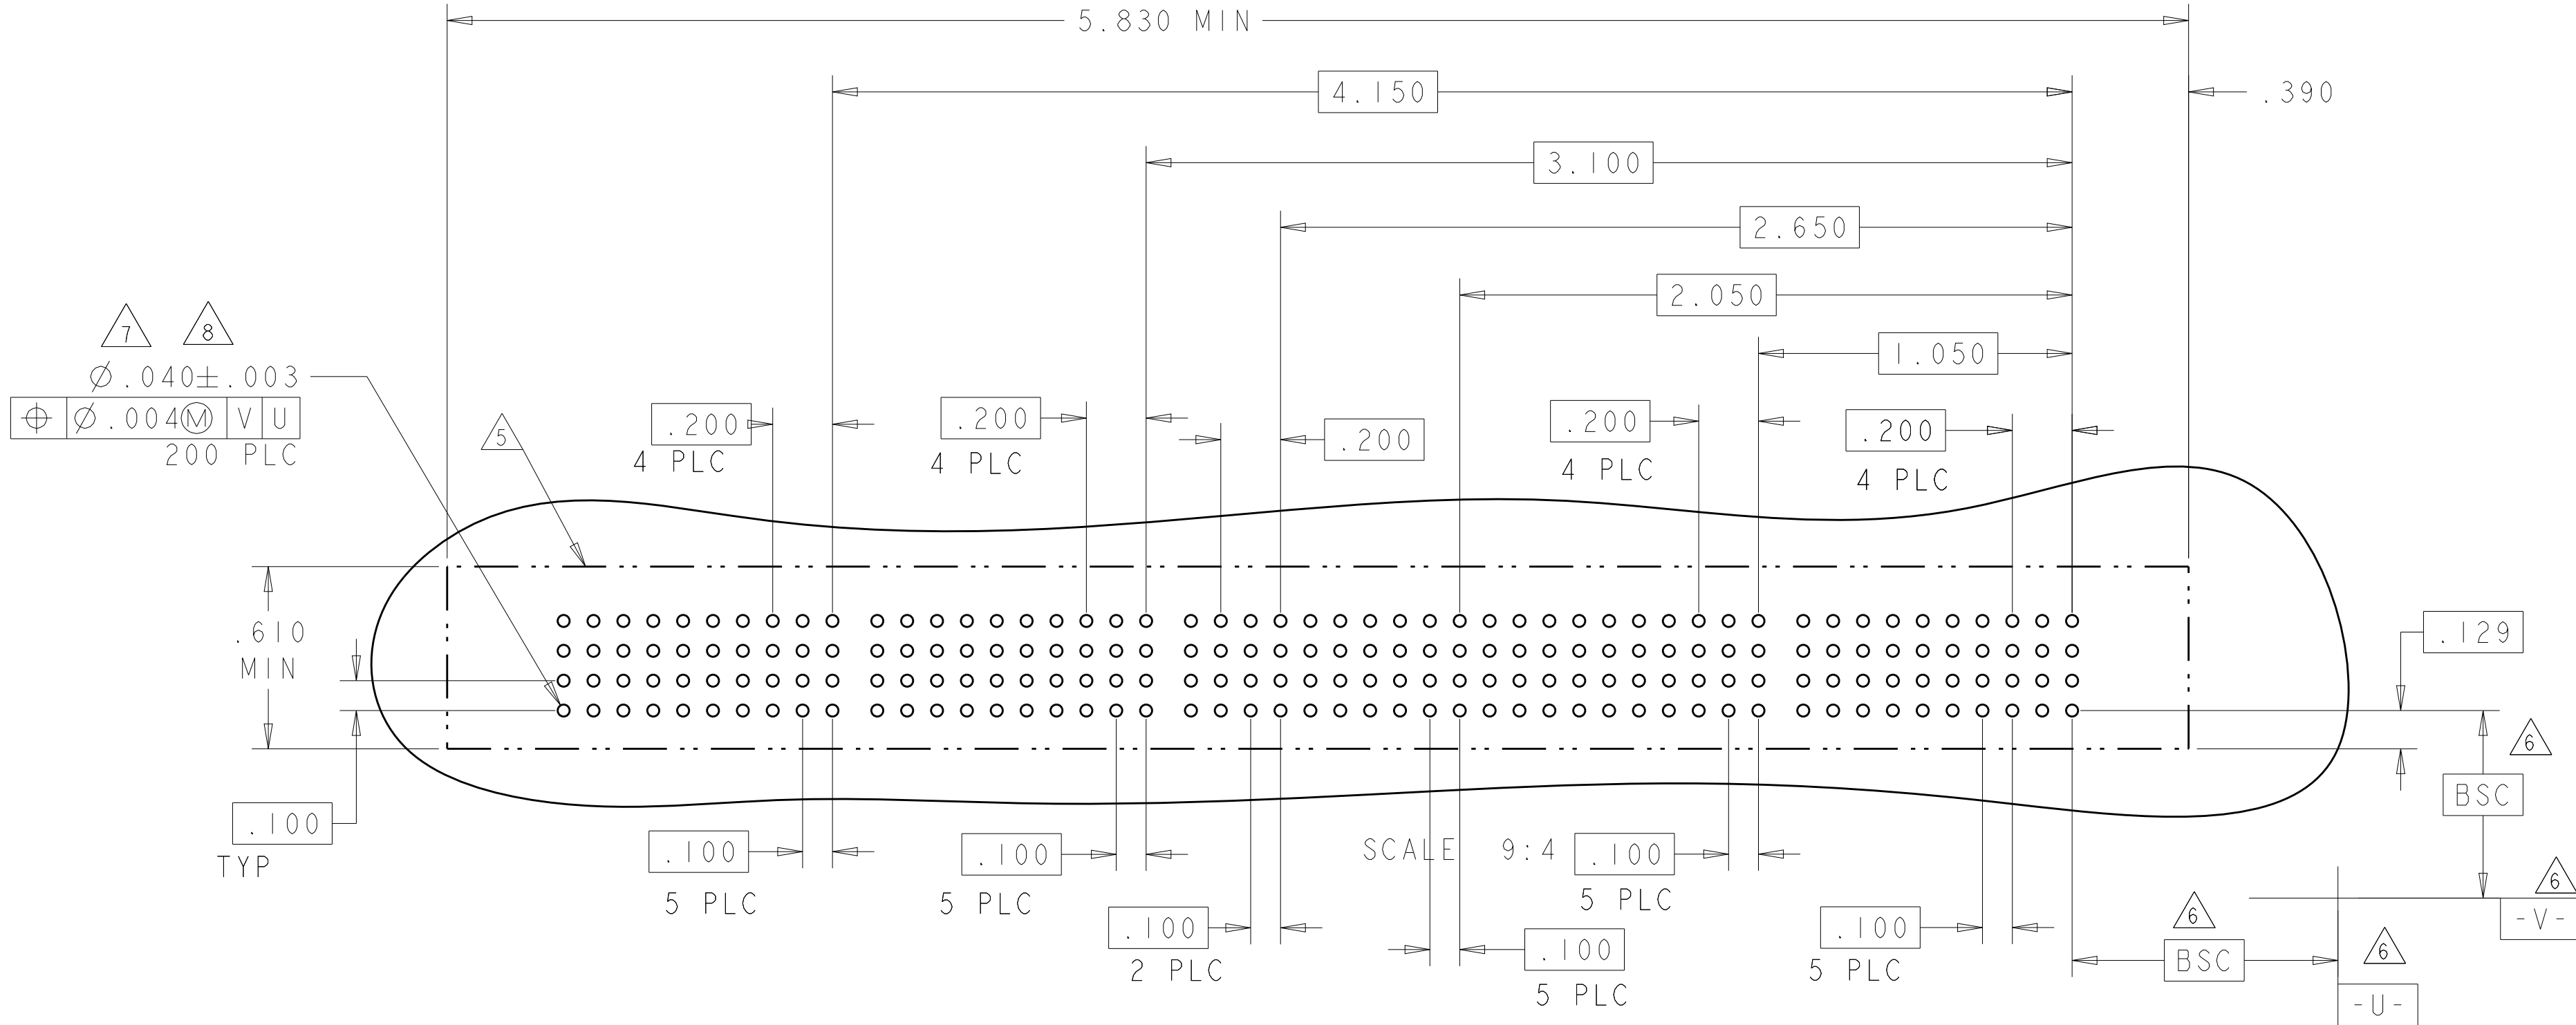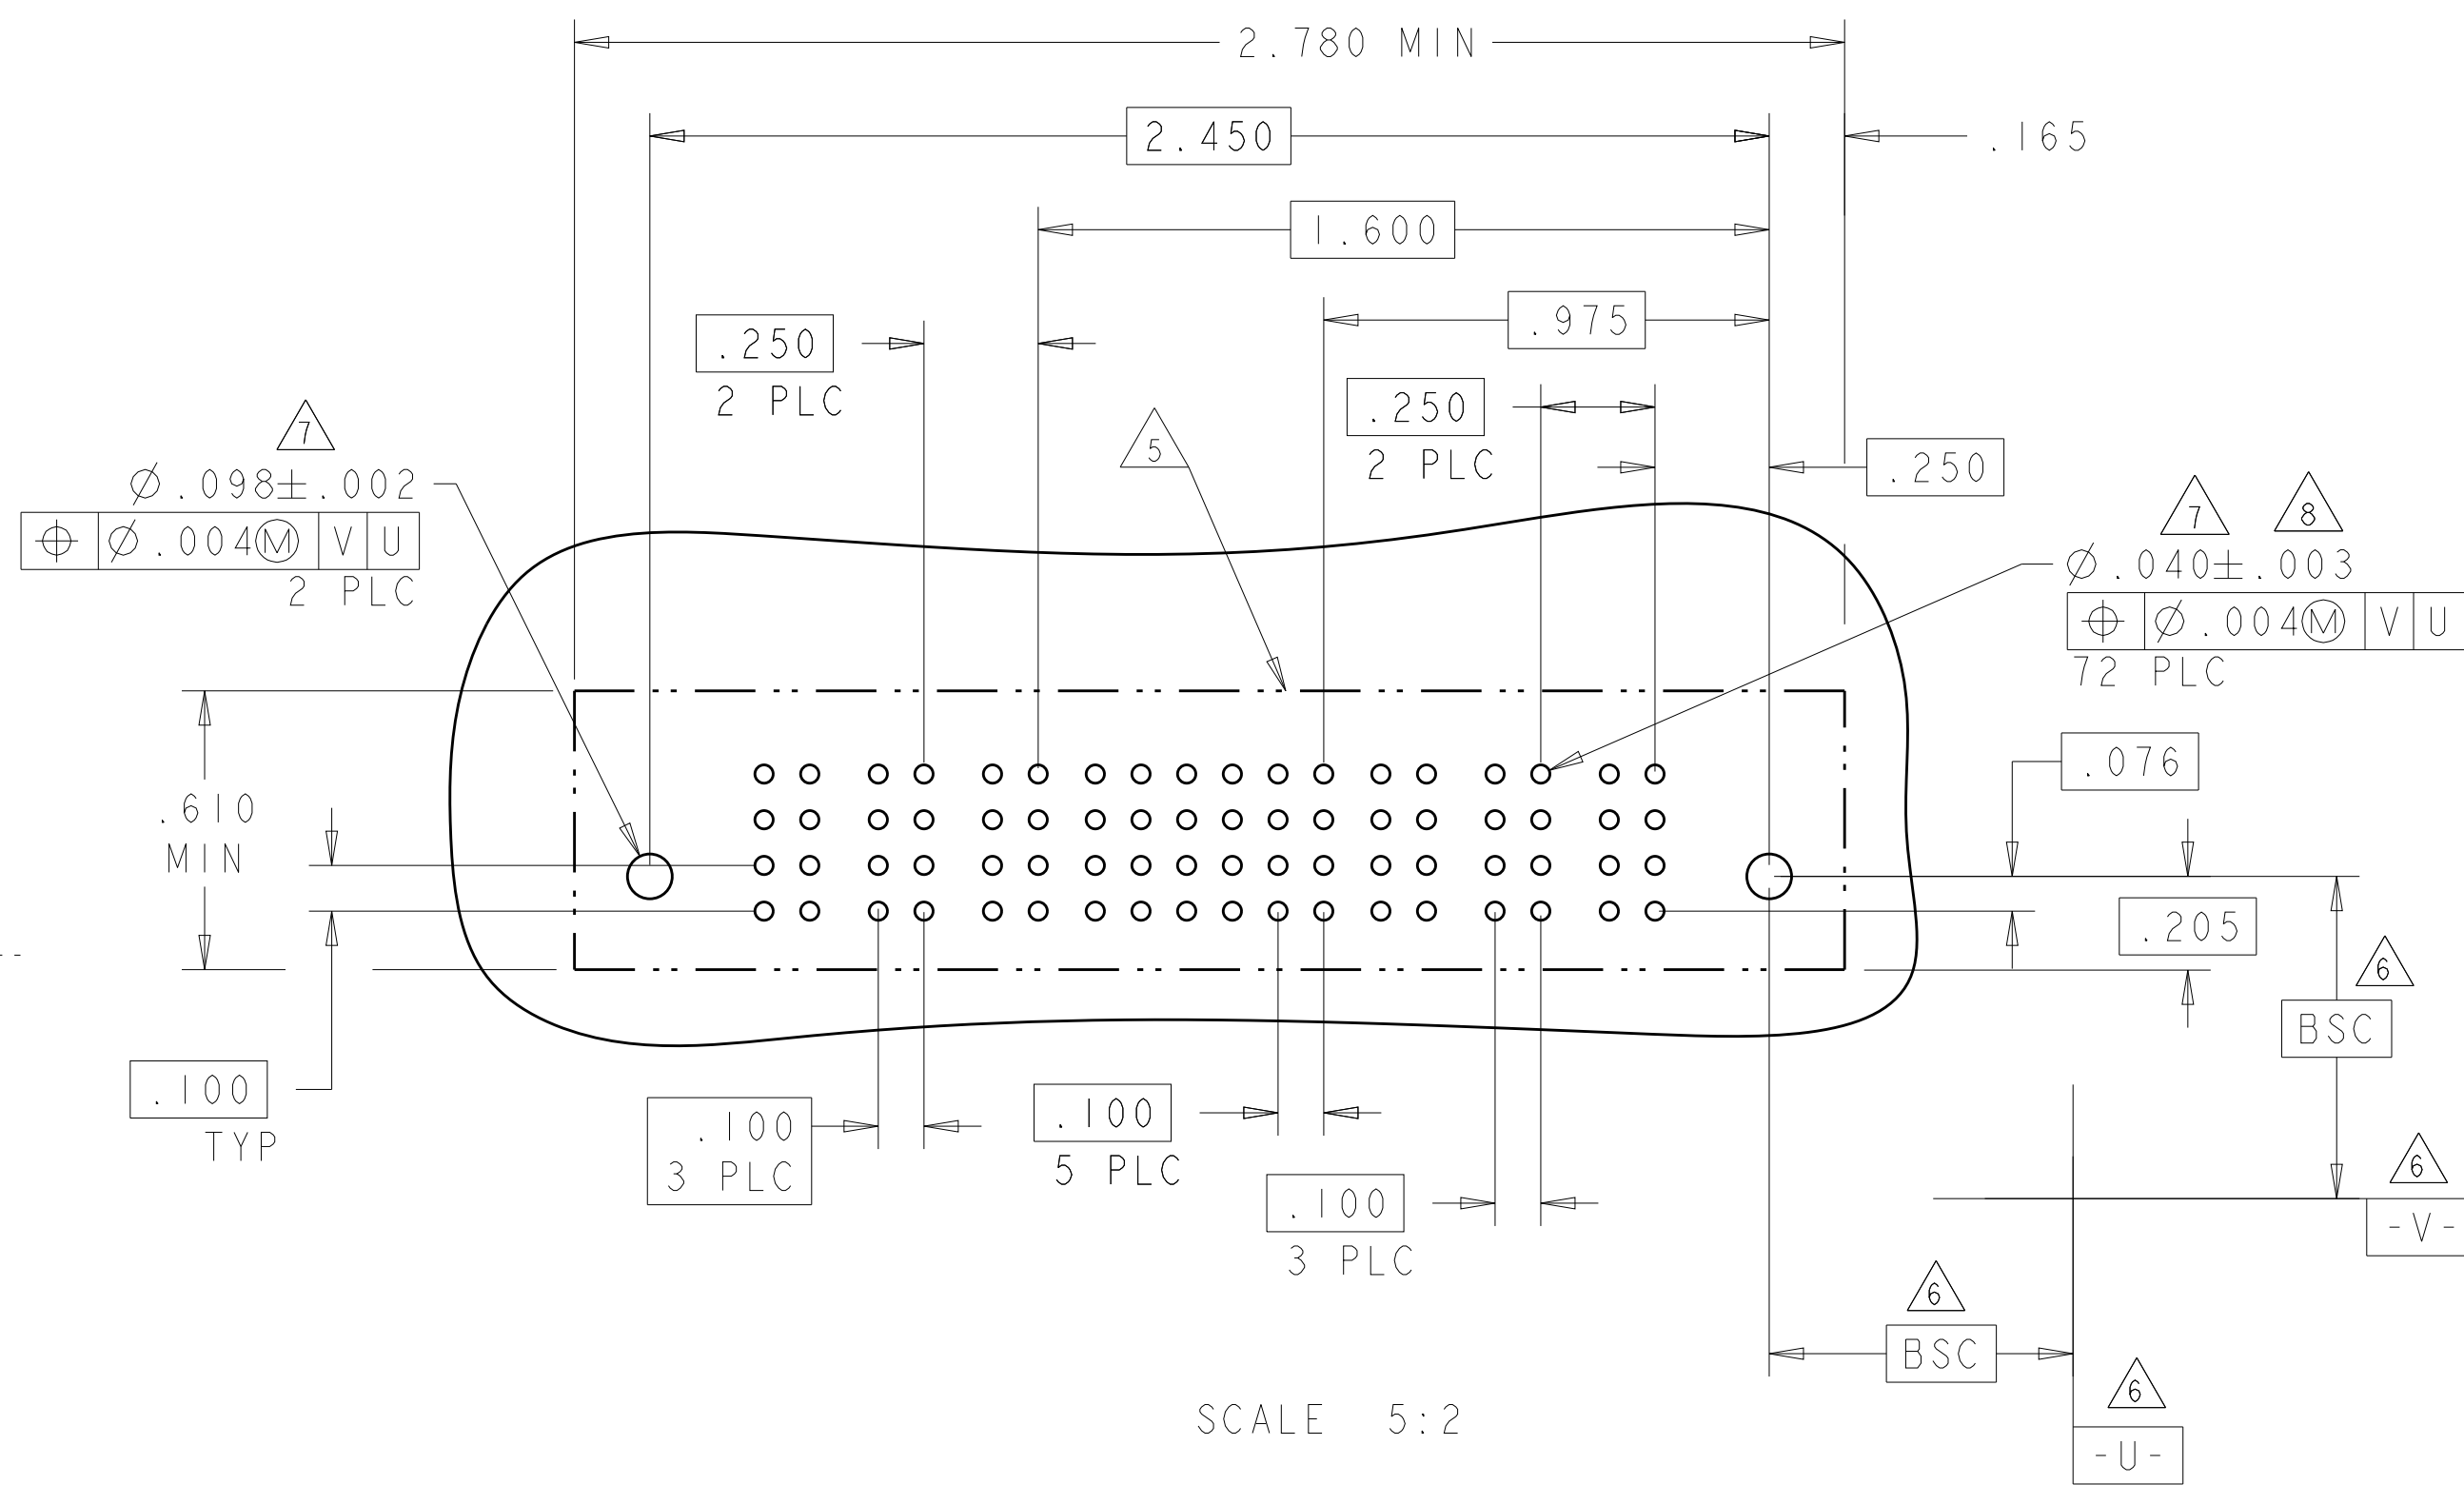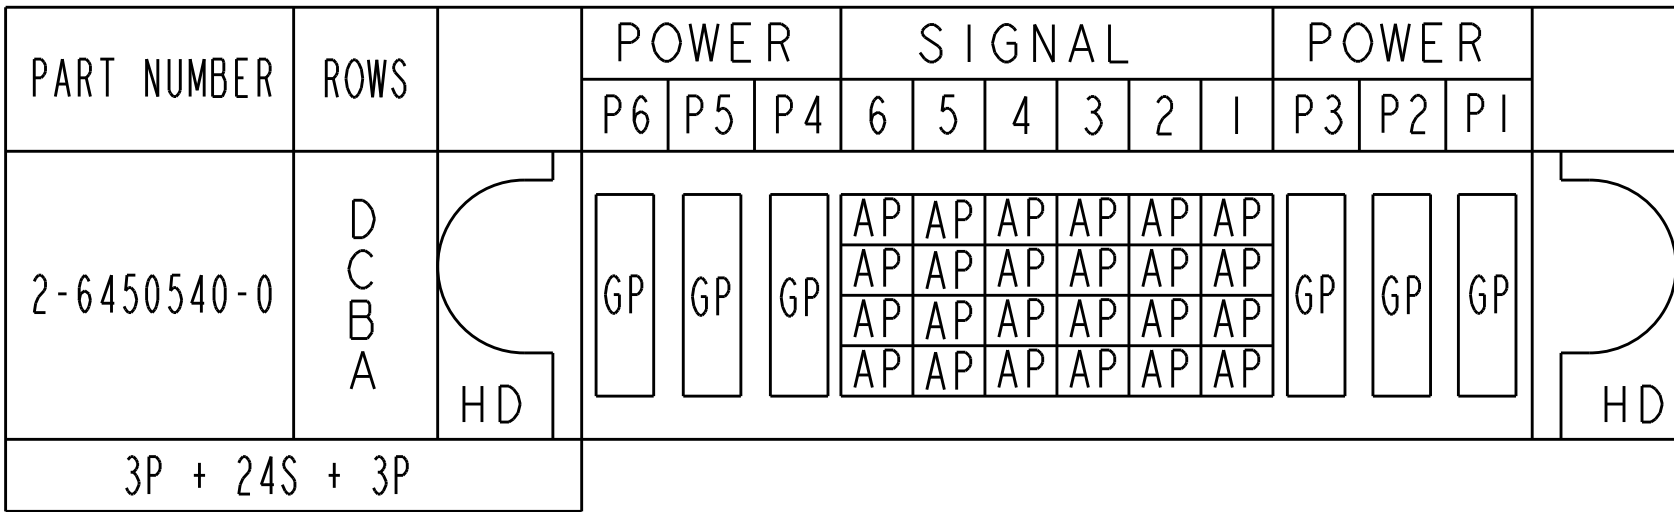

PART NUMBER	ROWS		POWER		SIGNAL					POWER						
			P7	P6	5	4	3	2	1	P5	P4	P3	P2	P1		
4-6450540-3	D C B A	 HD			AP	AP	AP	AP	AP	AP						 HD
5P + 20S + 2P																

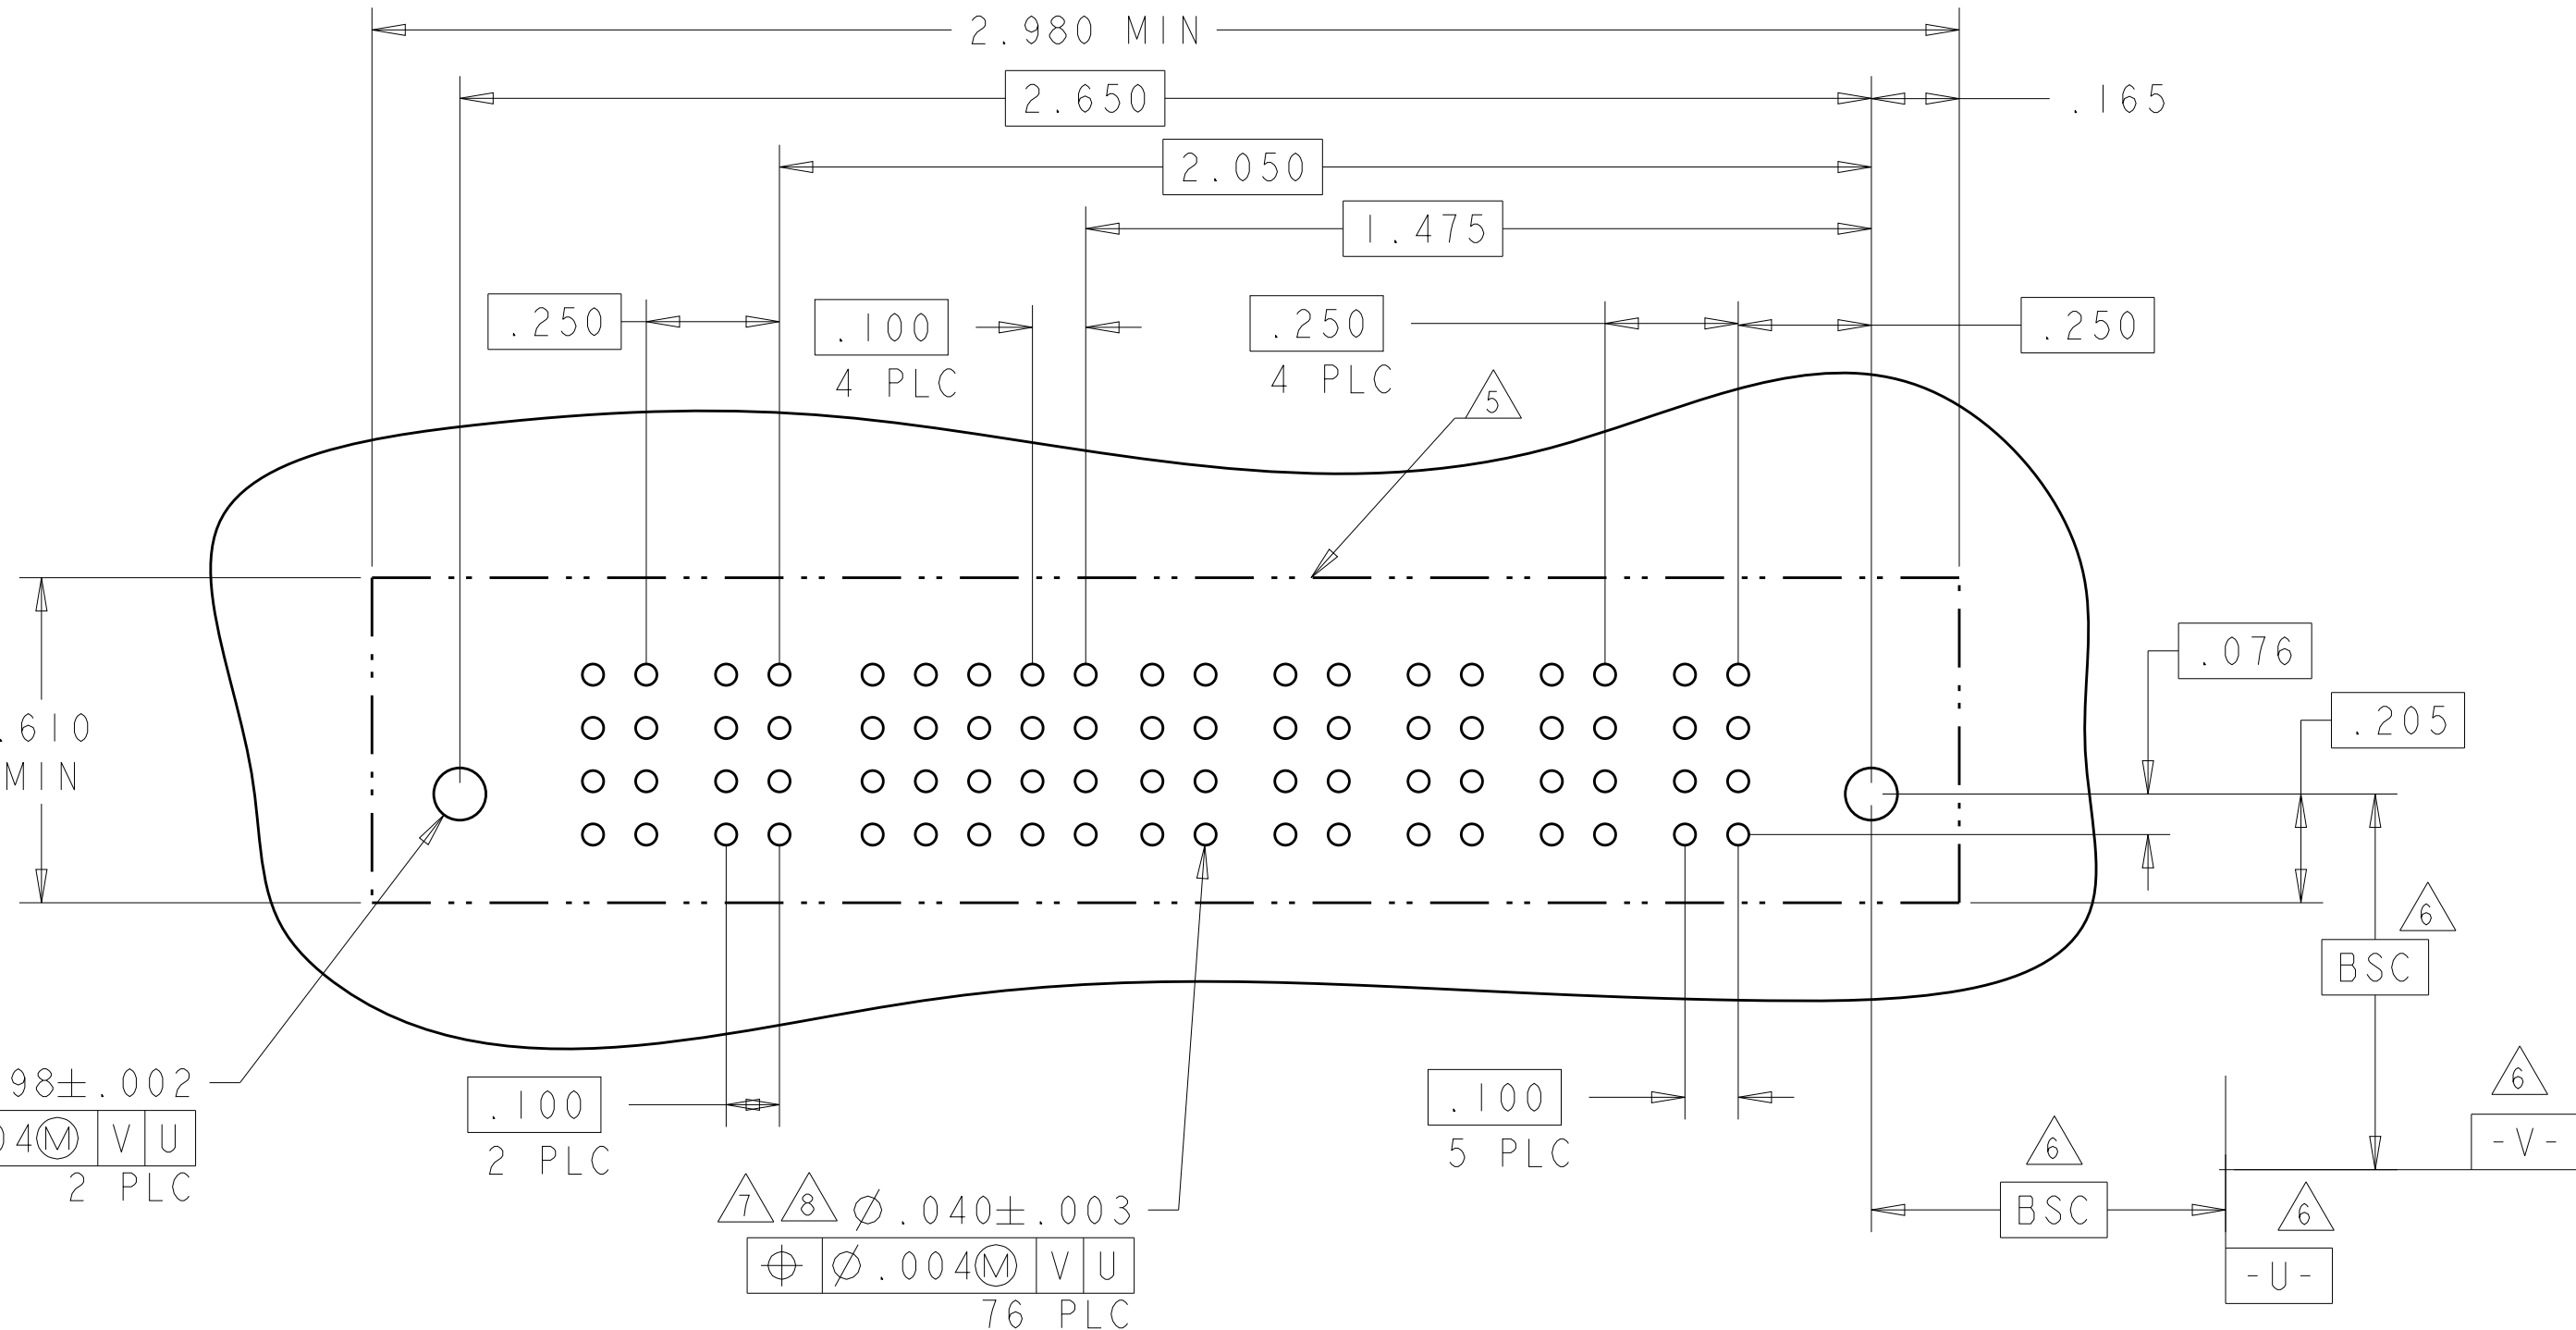


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWG. R. GRZYBOWSKI 29APR05 CHK. M. PERCHERKE 29APR05		 TE Connectivity	
DIMENSIONS: INCHES 		NAME: VERTICAL RECEPTACLE ASSEMBLY WITH GUIDES MULTI-BEAM XL PRODUCT SPEC: 108-1973 APPLICATION SPEC: 114-13038 WEIGHT: -			
TO: FRANCES, UNLESS OTHERWISE SPECIFIED: 0 PLC ±.000 2 PLC ±.01 3 PLC ±.005 4 PLC ±.0020 ANGLES ±.2° FINISH		SIZE: CASE CODE: DRAWING NO: 100779 © 6450540 RESTRICTED TO: -		SCALE: 2:1 SHEET: 8 OF 19 REV: KS	
MATERIAL		CUSTOMER DRAWING			


Technical drawing of a mechanical part, likely a nozzle or probe, showing dimensions and tolerances. The part is cylindrical with a rounded end. Key dimensions include a total length of 7.500 MIN, a diameter of $\varnothing .098 \pm .003$, and a hole diameter of $\varnothing .004$. Surface finish requirements are indicated by 'V' and 'U' symbols. The drawing also shows a series of holes along the length, with a pitch of .100 and a total length of 4.050 for the hole array. The part is labeled '280PLC' and '29PLC'.

[illegible]4805 (3/11)


PART NUMBER	ROWS	POWER										
		P11	P10	P9	P8	P7	P6	P5	P3	P2	P1	
4-6450540-2	D C B A	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	
11HDP												

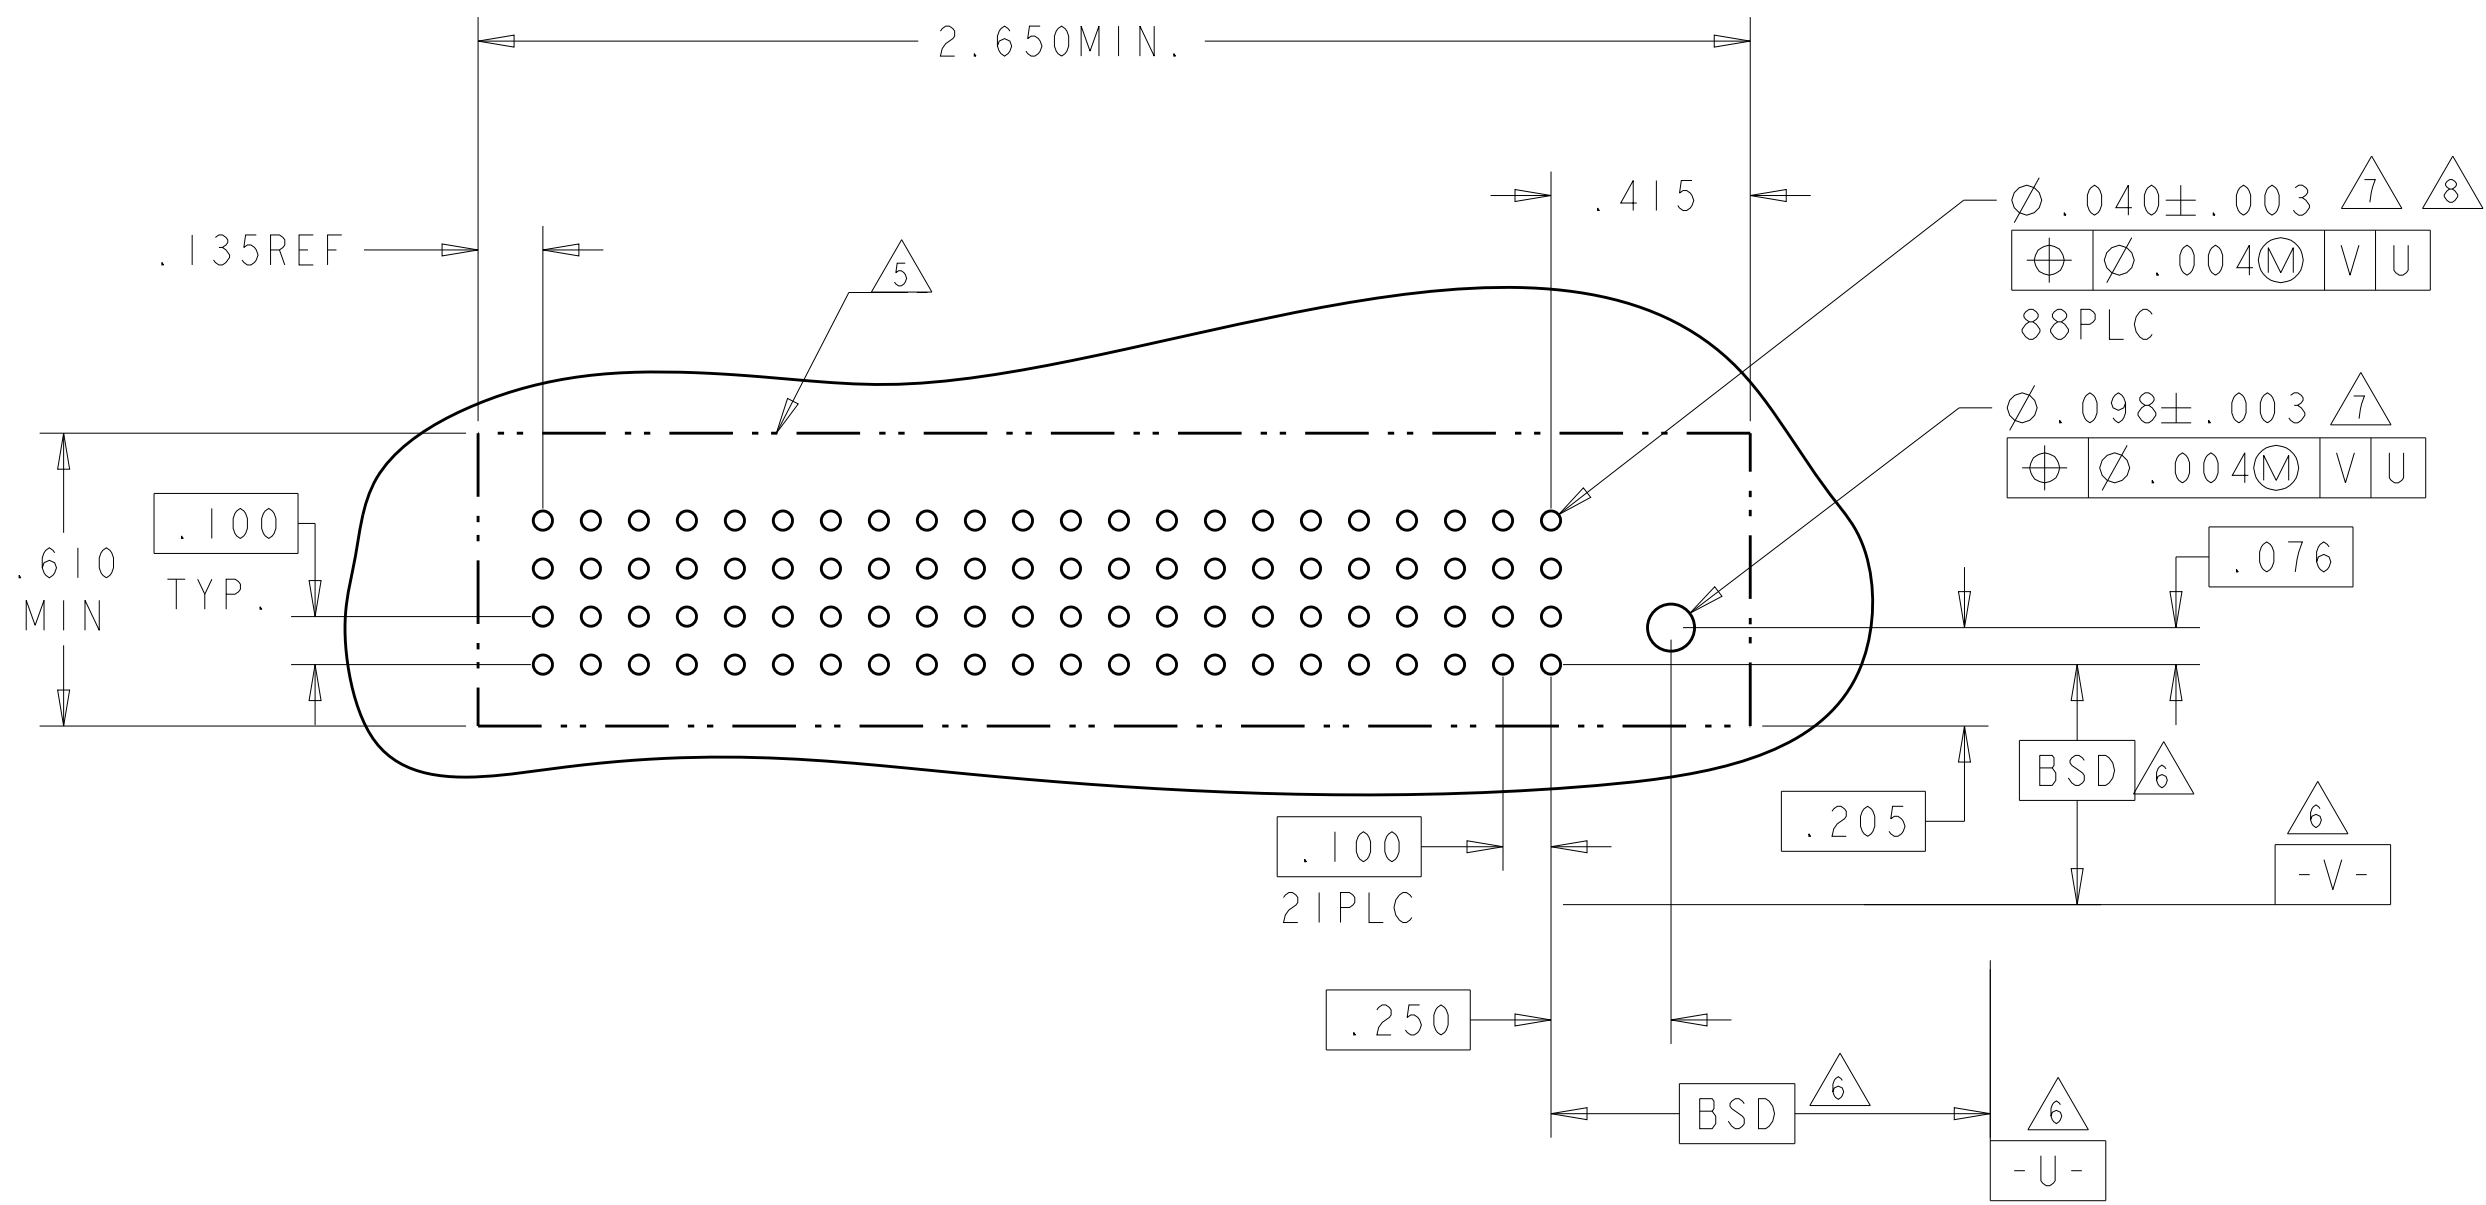4805 (3/11)



PART NUMBER	ROWS	POWER											
		P12	P11	P10	P9	P8	P7	P6	P5	P3	P2		P1
4-6450540-5	DC CB A	GS	GS	GS	GS	GS	GS	GS	GS	GS	GS	GS	HD
12HDP													

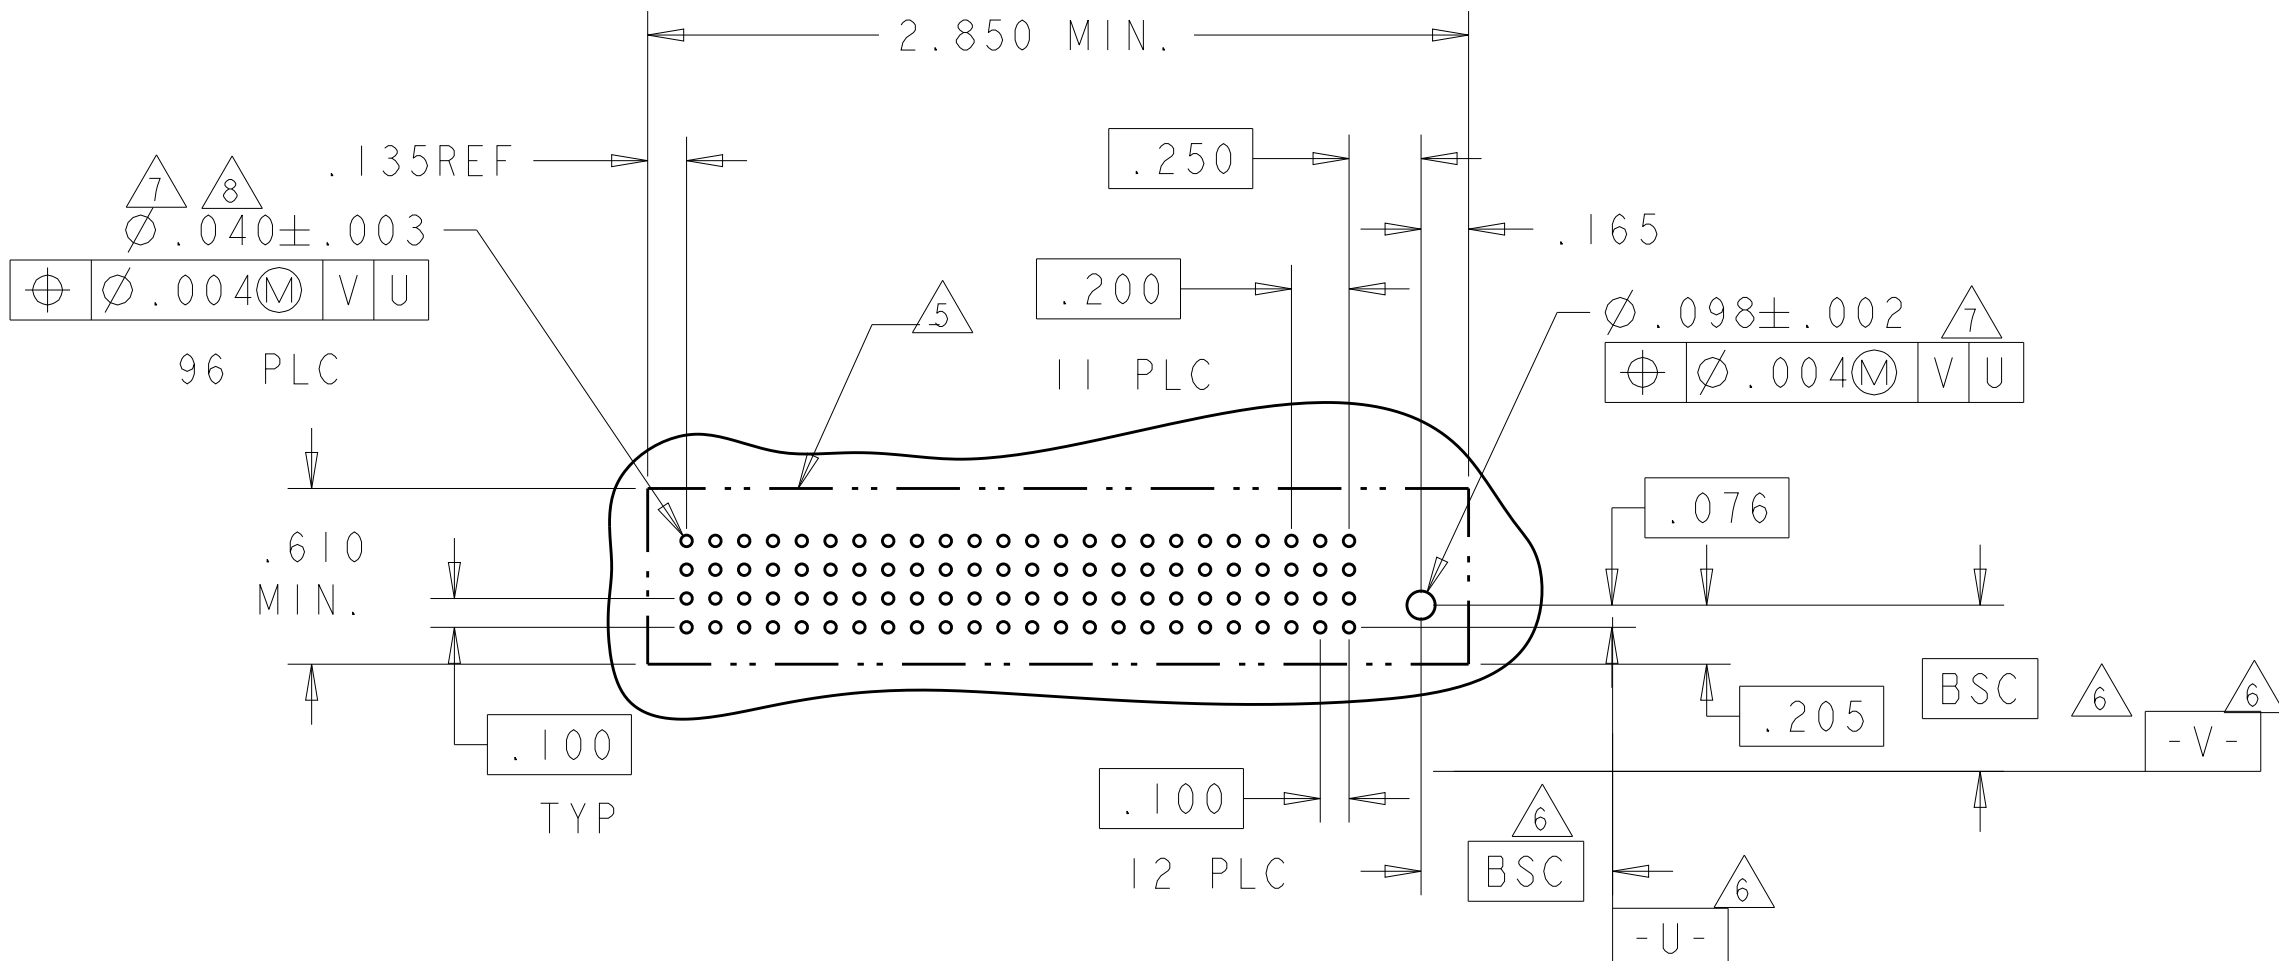




PART NUMBER	ROWS		POWER			SIGNAL		POWER			
			P6	P5	P4	2	1	P3	P2	P1	
4-6450540-7	D C B A										
											
3P + 8S + 3P											

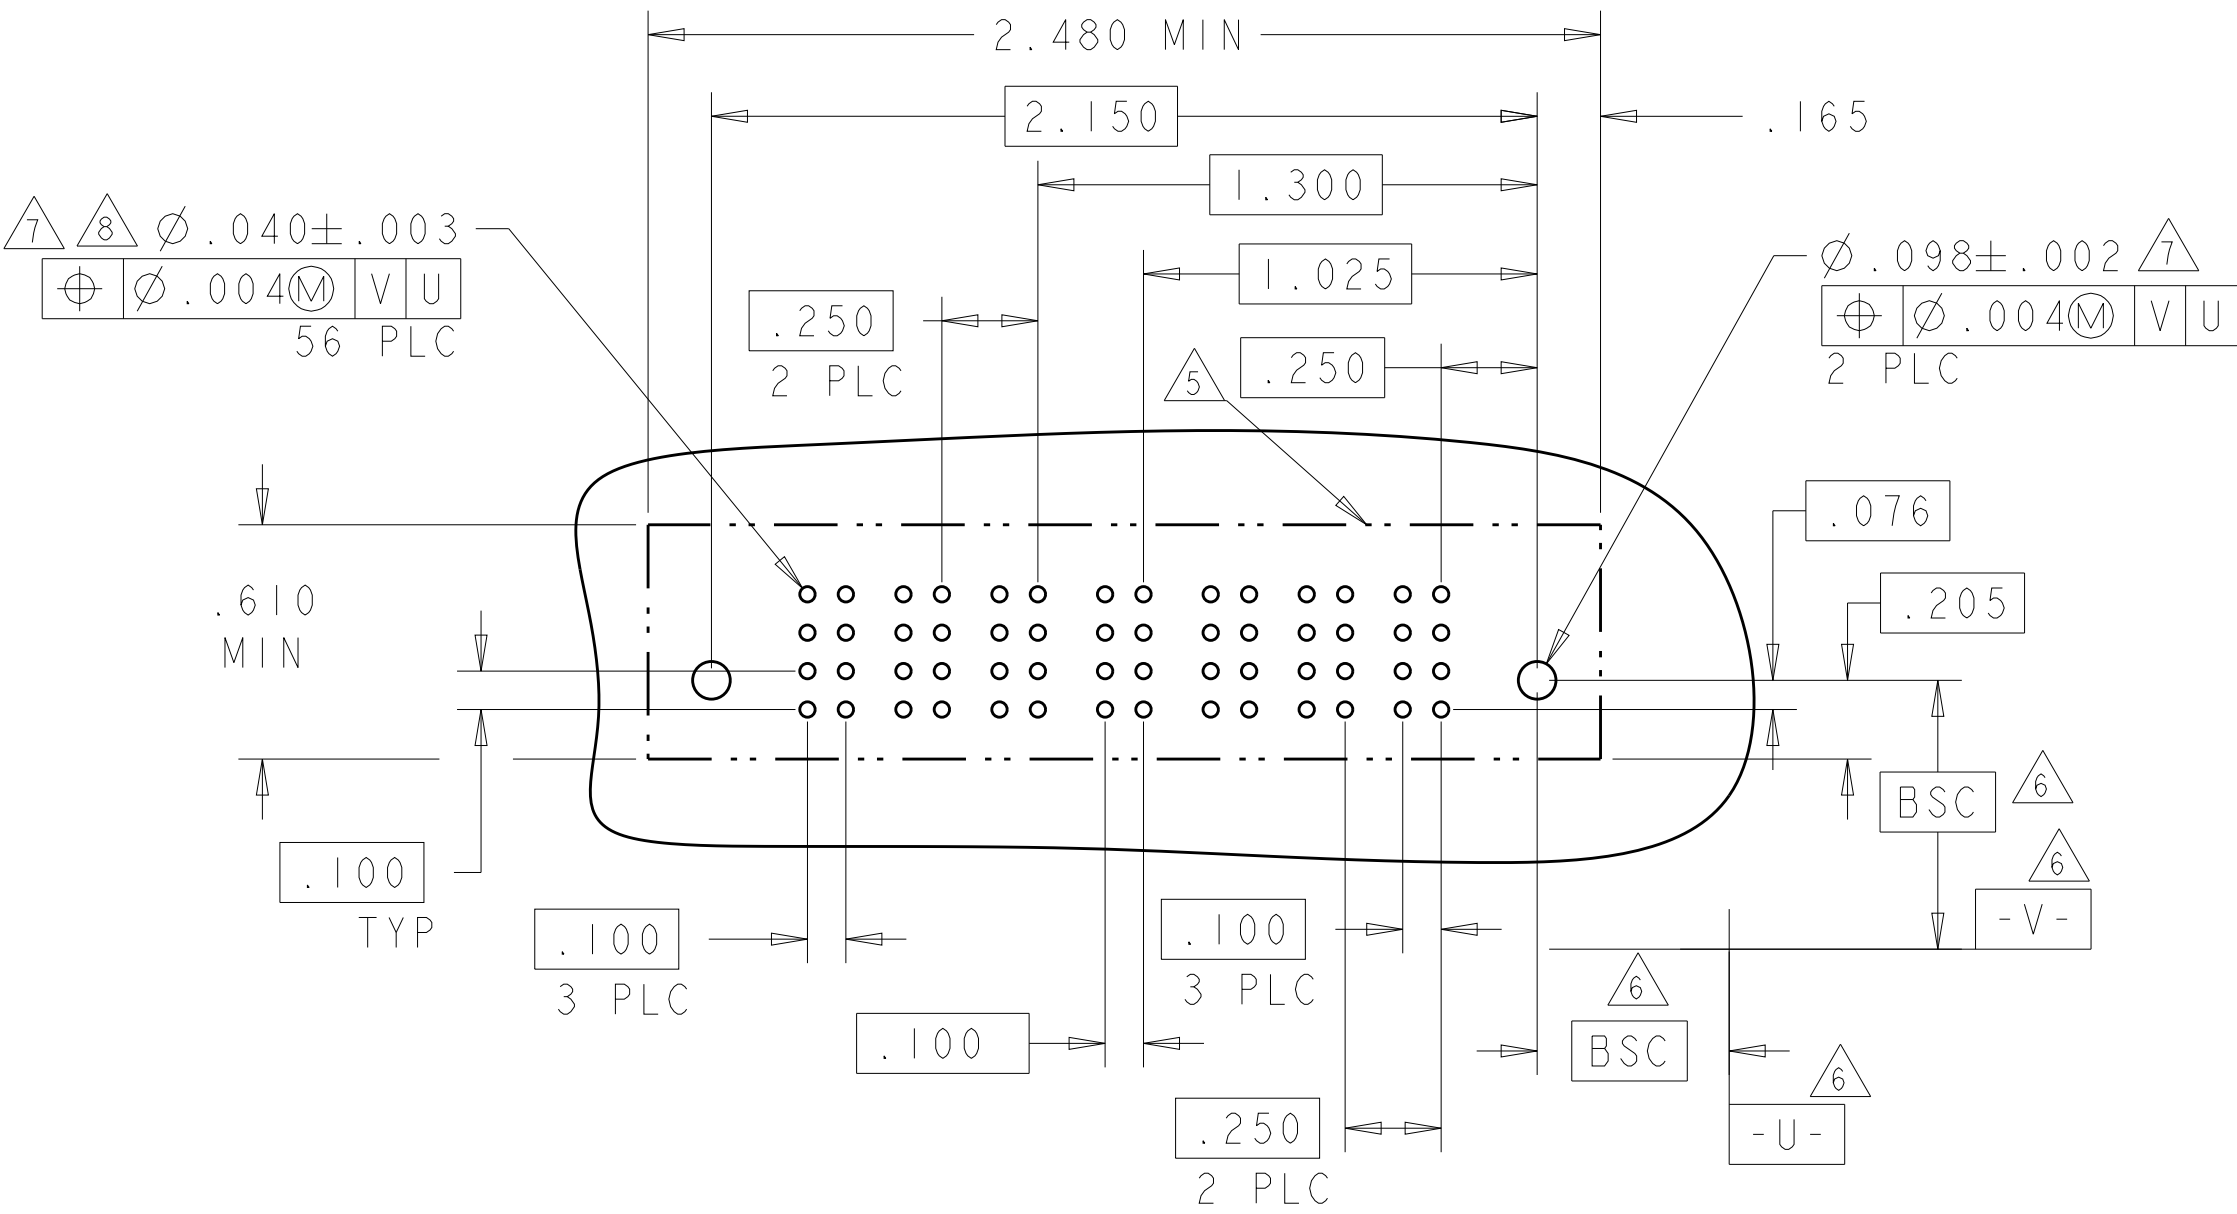
4805 (3/11)

LOC		DIST		REVISIONS				
P	LYR	DESCRIPTION			DATE	DWN	APVD	
-	-	SEE SHEET 1			-	-	-	

PART NUMBER	ROWS		POWER		SIGNAL				POWER		
			P2	4	3	2	1	P1			
4-6450540-8	D C B A		GS	AP	AP	AP	AP	GS			
				AP	AP	AP	AP				
				AP	AP	AP	AP				
				AP	AP	AP	AP				
IP + 16S + 1P											

PART NUMBER	ROWS		POWER		SIGNAL				POWER		
			P4	P3	4	3	2	1	P2	P1	
5-6450540-1	D C B A				AP	AP	AP	AP			
					AP	AP	AP	AP			
					AP	AP	AP	AP			
					AP	AP	AP	AP			
2P + 16S + 2P											

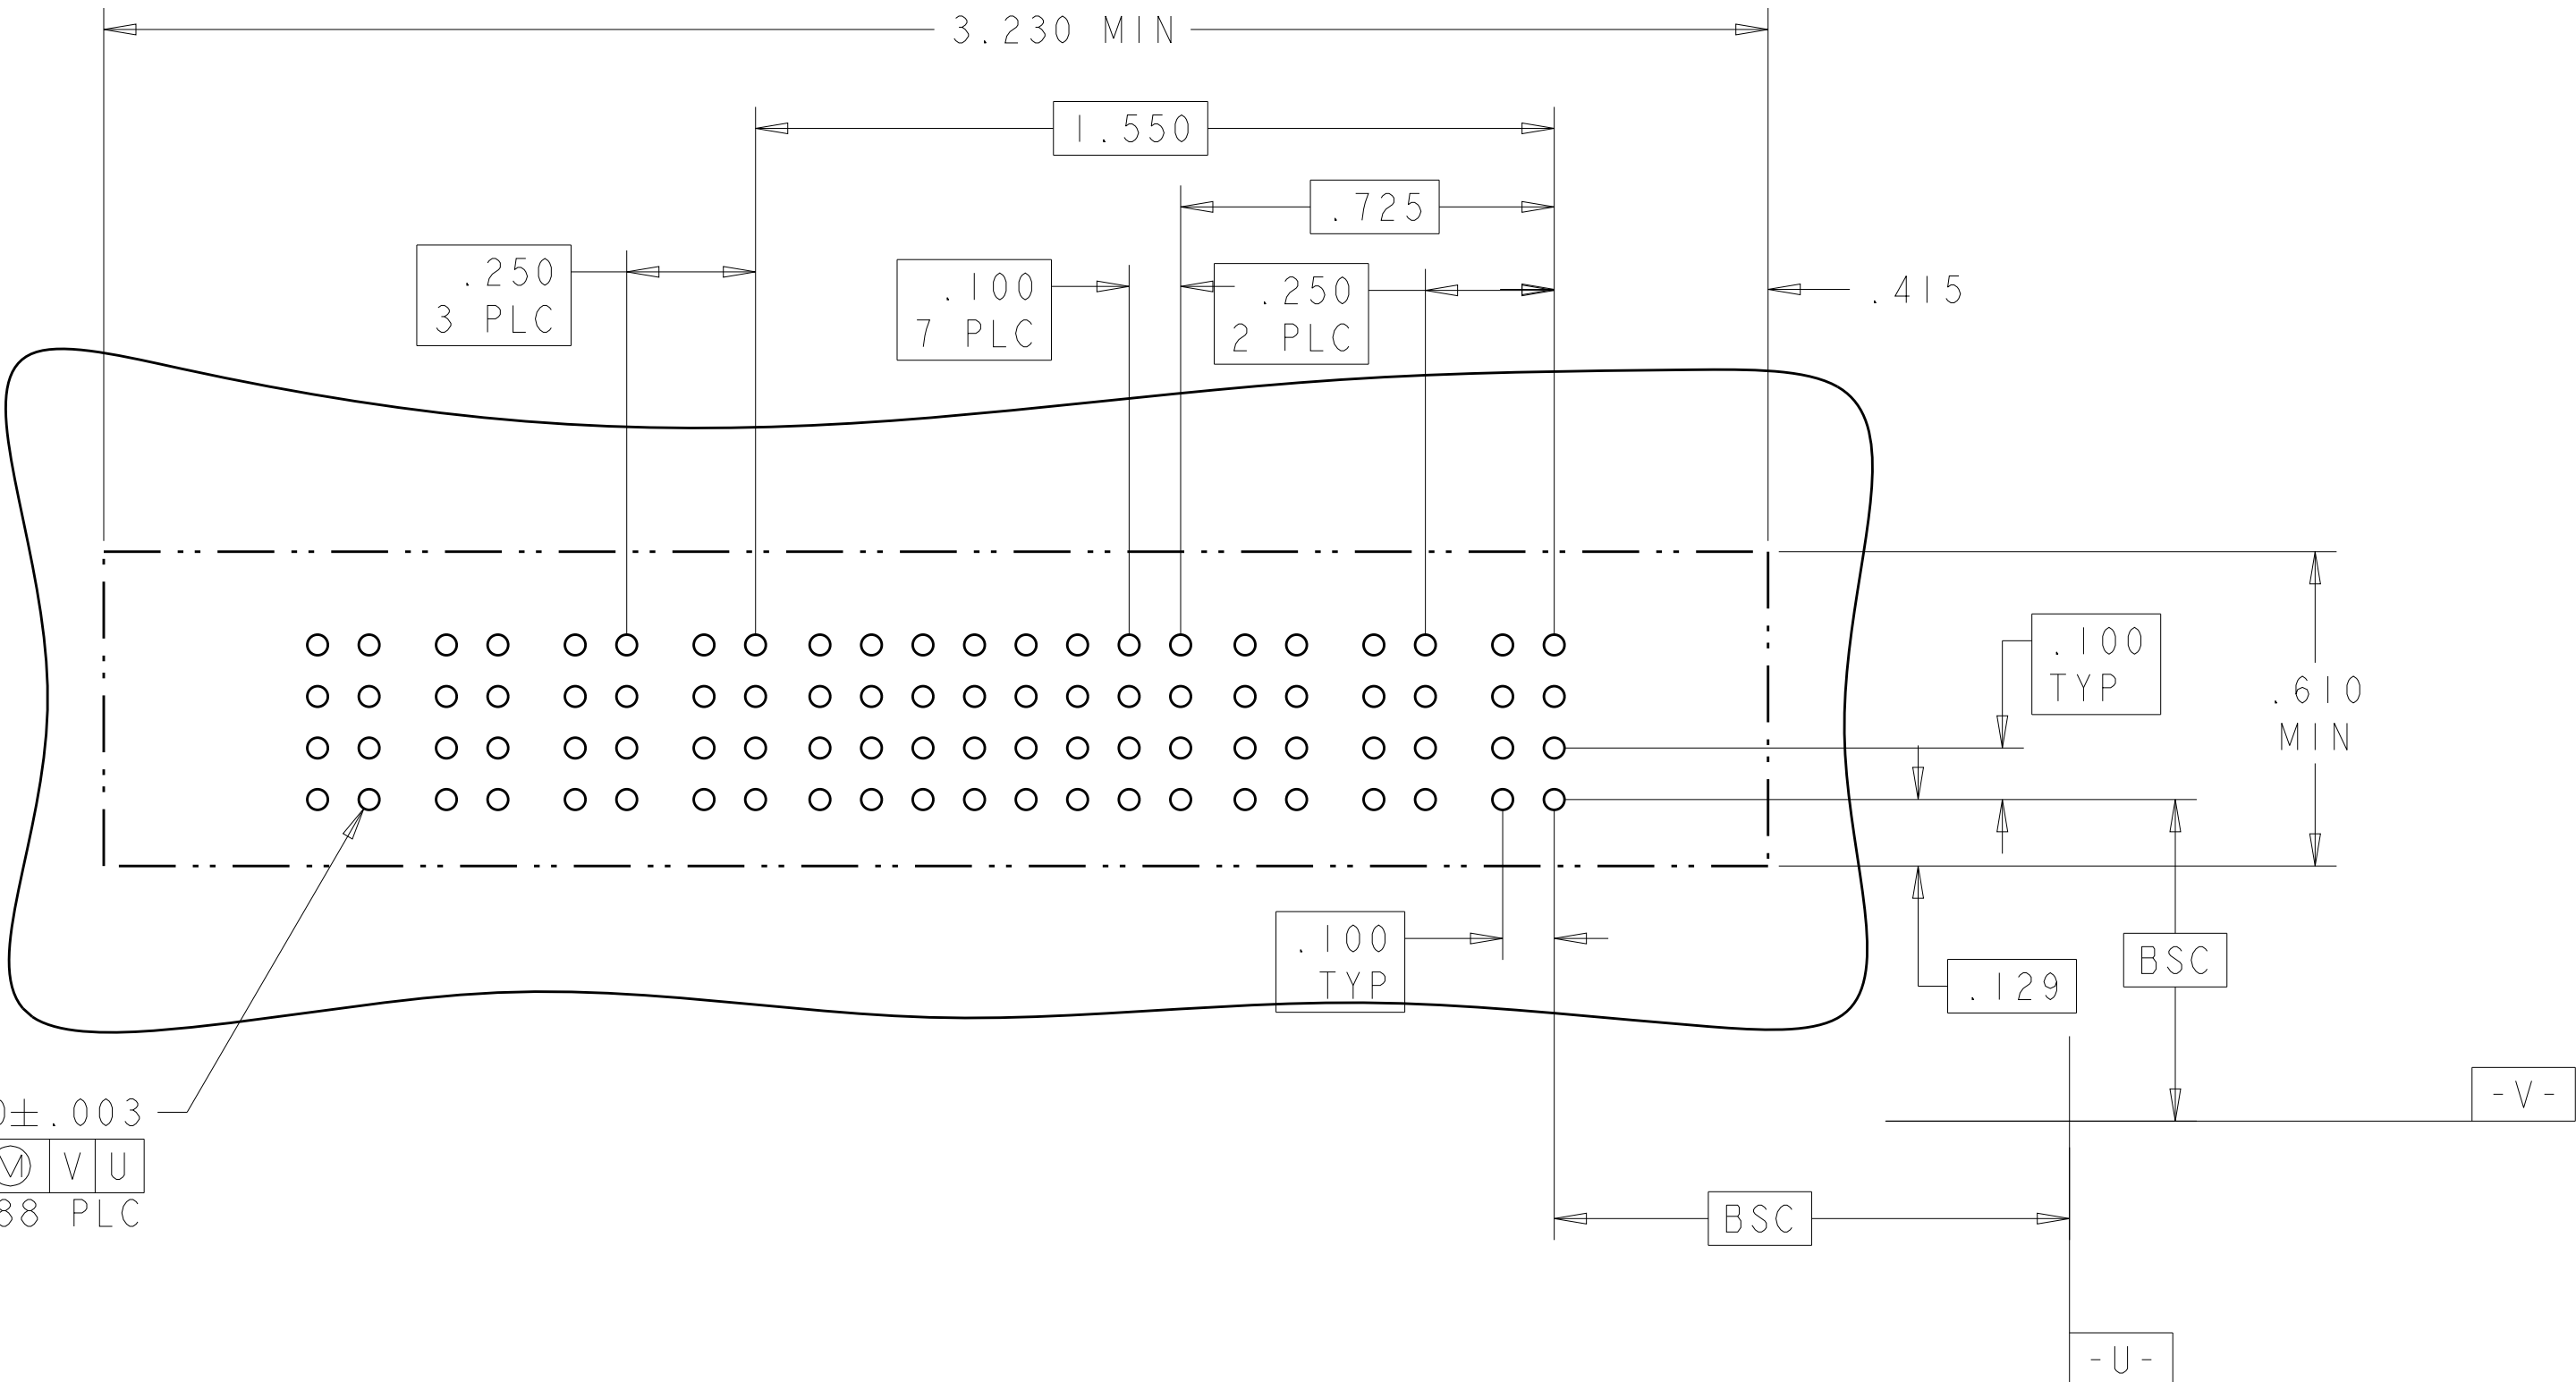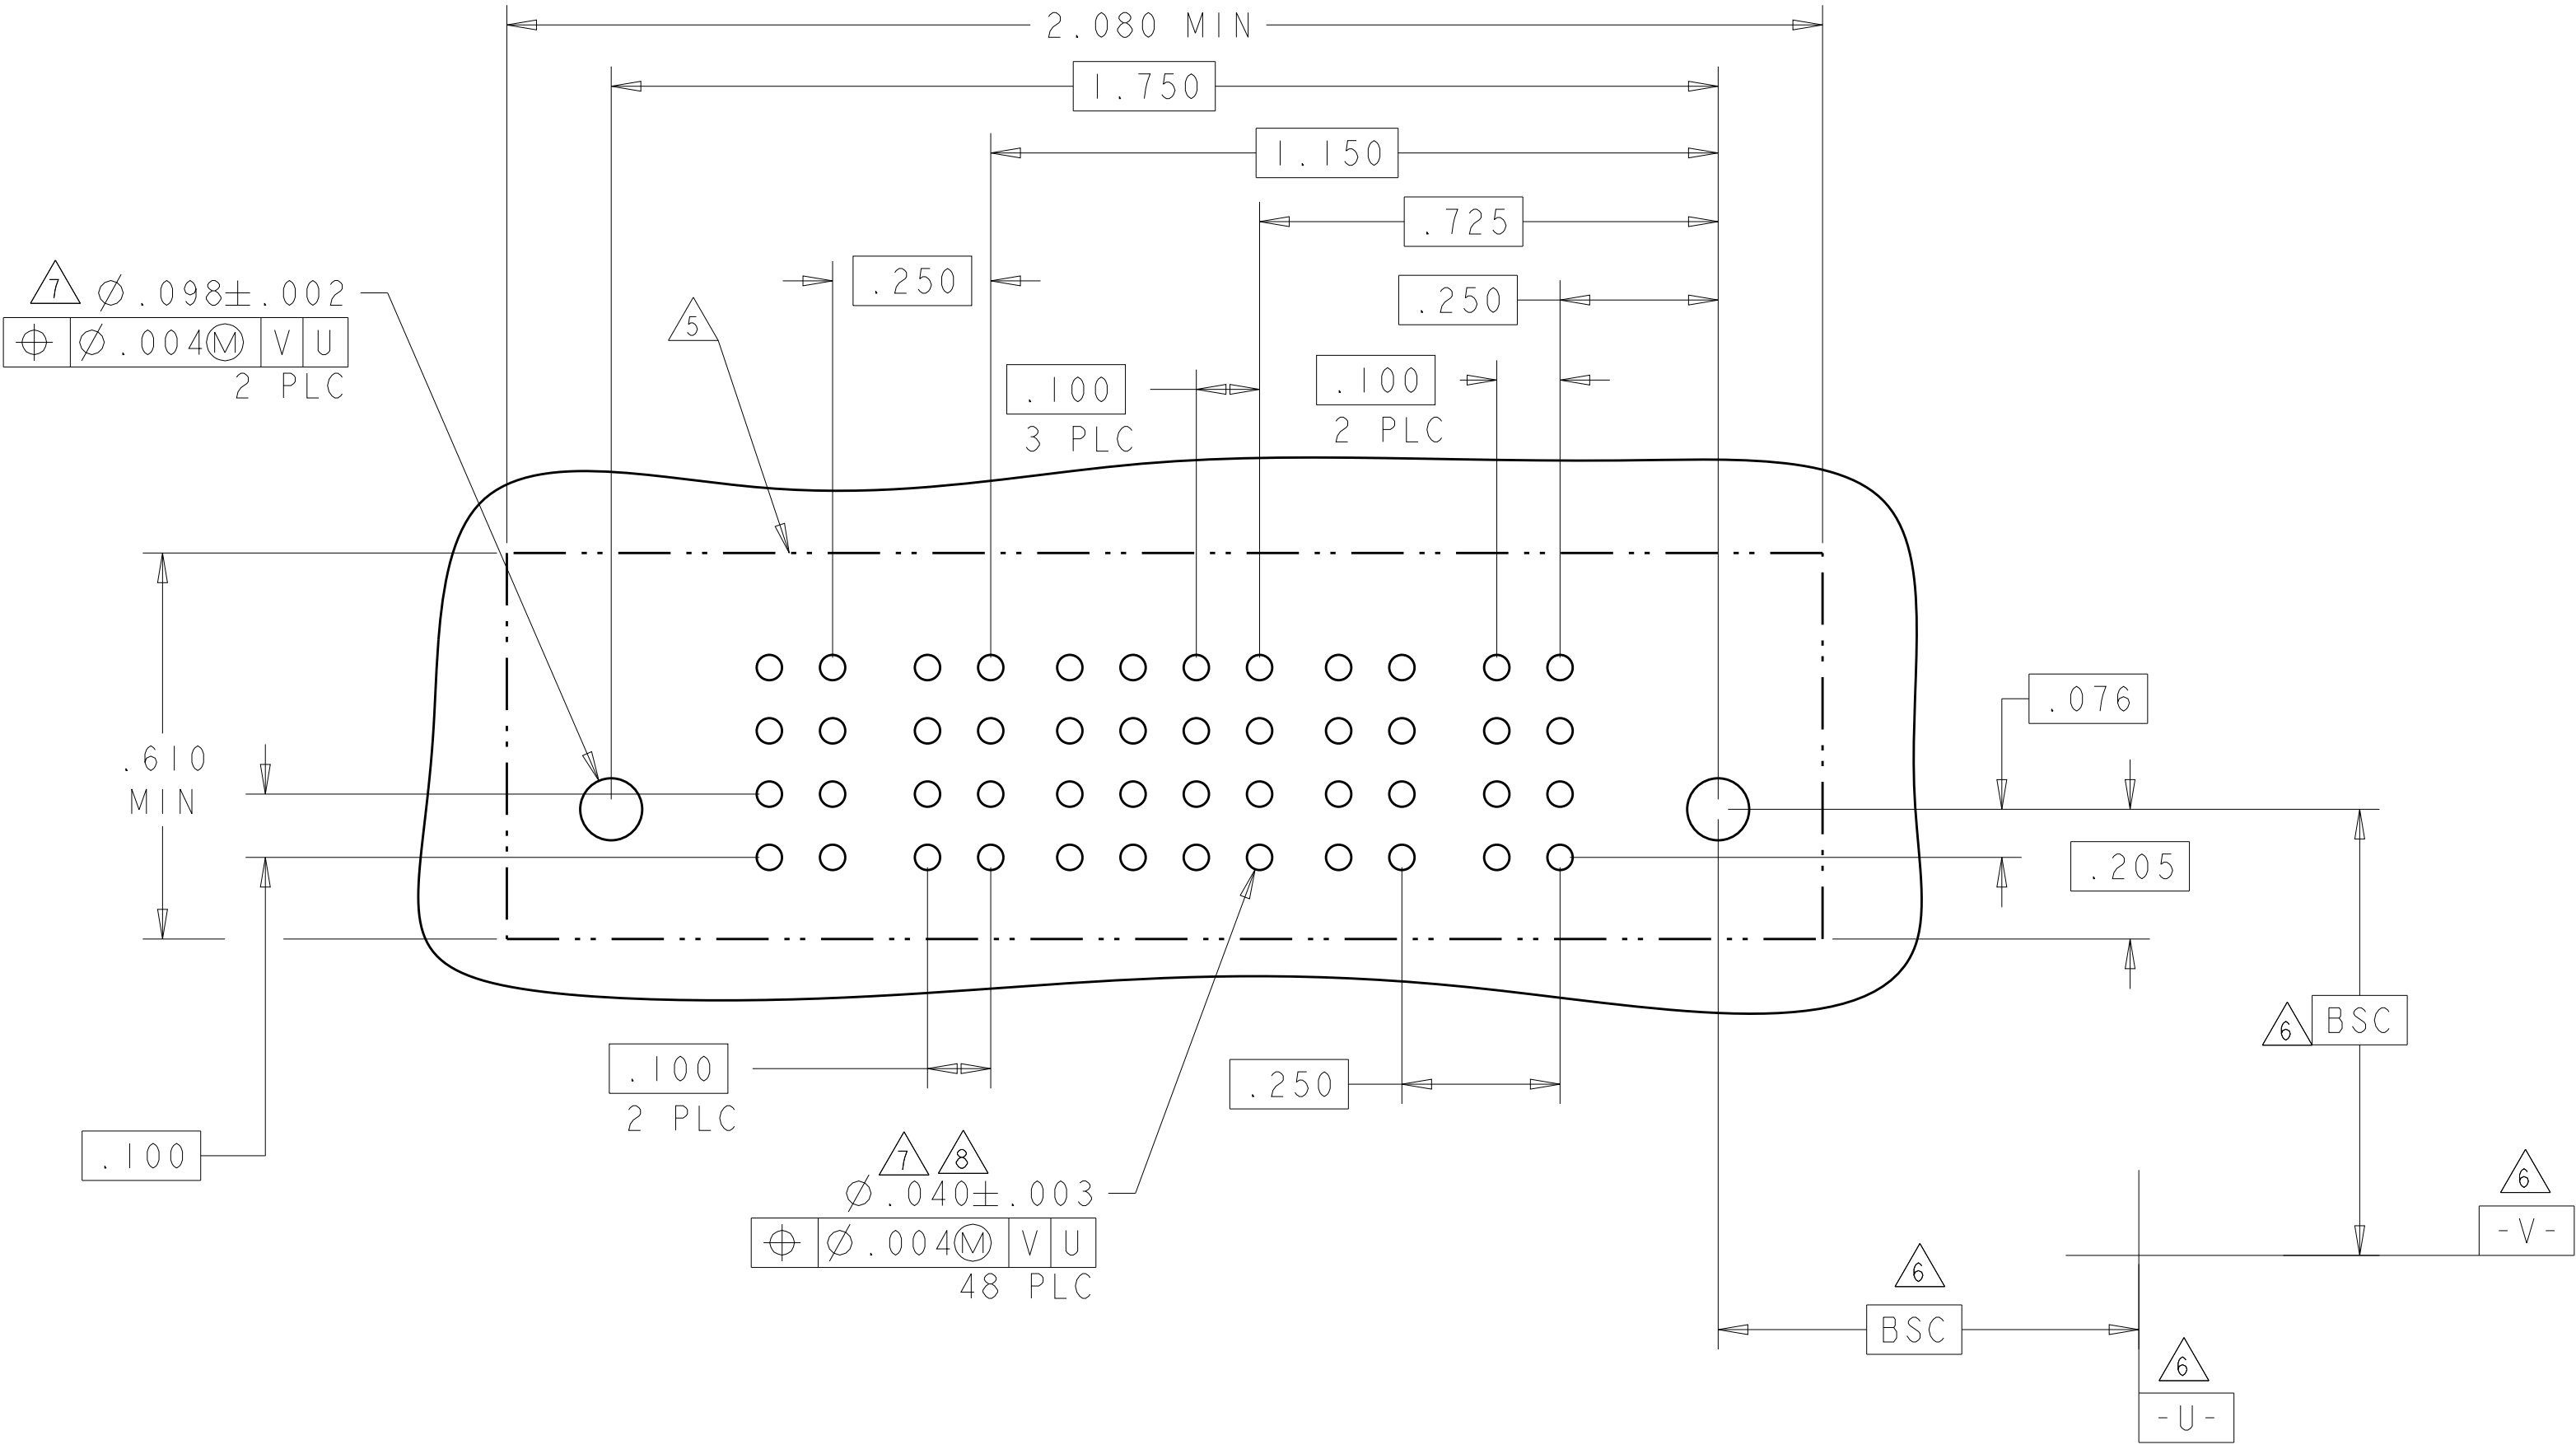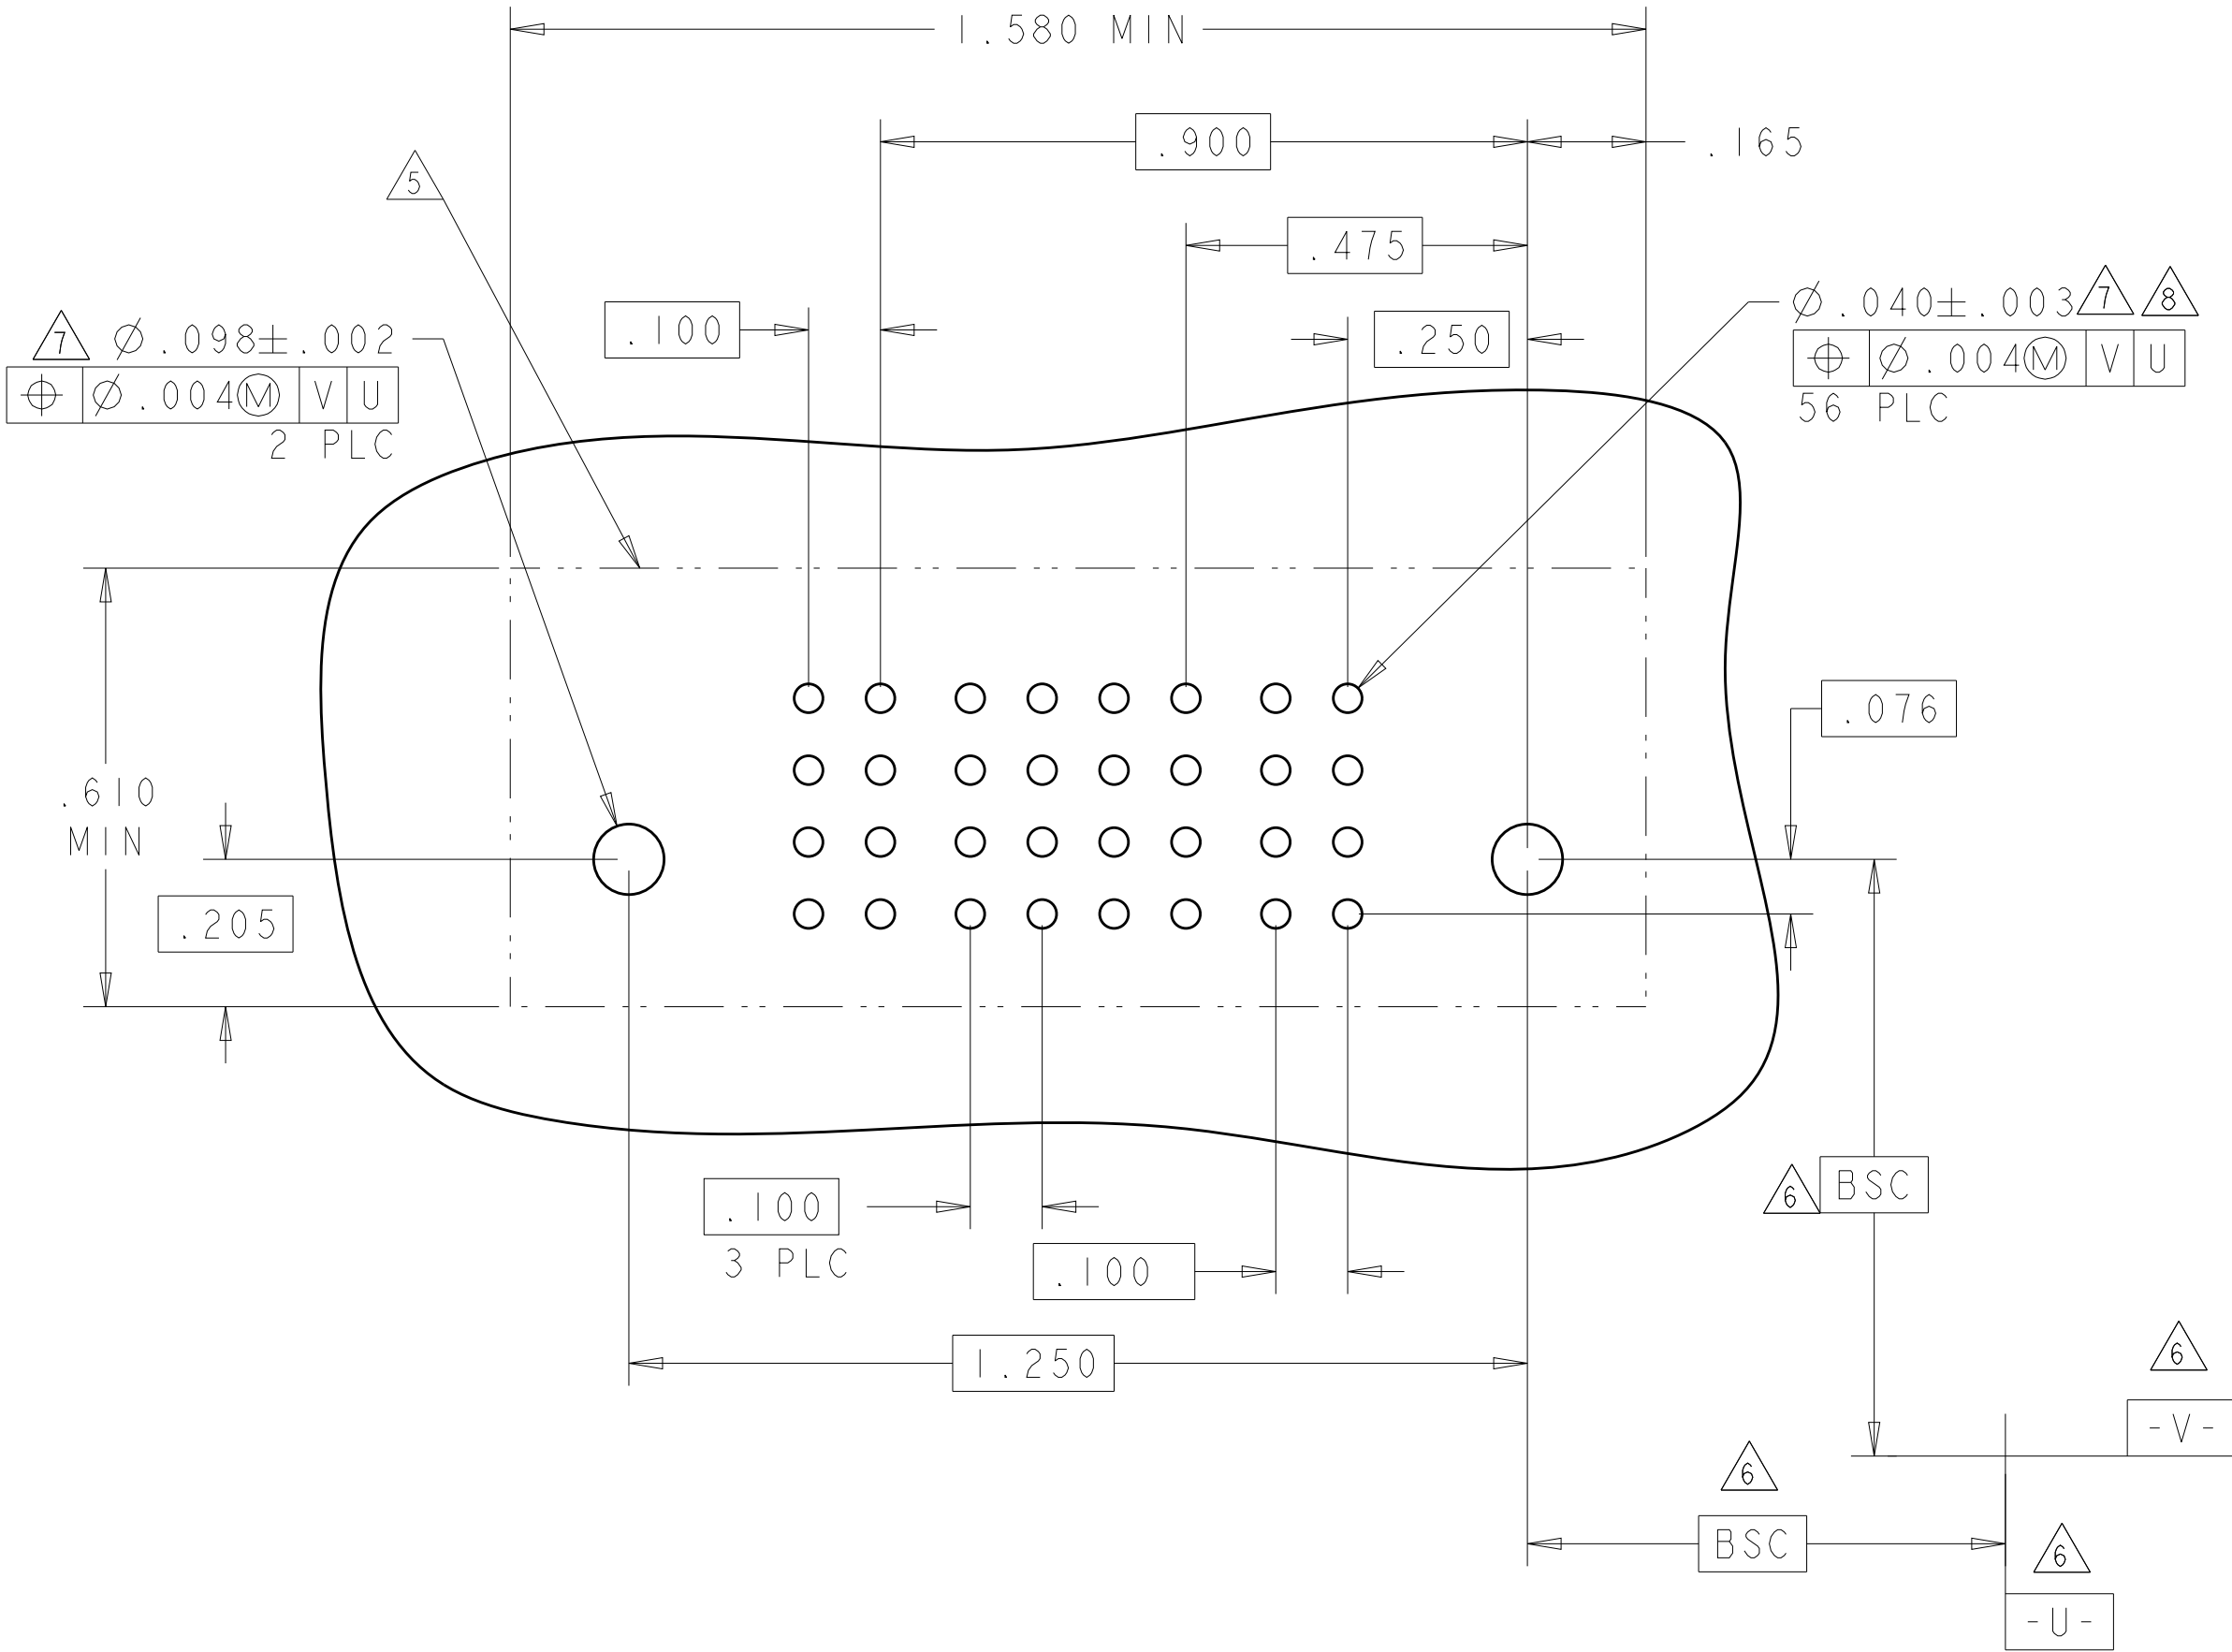


PART NUMBER	ROWS		POWER				SIGNAL								POWER			
			P7	P6	P5	P4	8	7	6	5	4	3	2	1	P3	P2	P1	
1-6450540-1	D C B A						P	P	P	P	P	P	P	P				
							P	P	P	P	P	P	P	P				
							P	P	P	P	P	P	P	P				
							P	P	P	P	P	P	P	P				
3P + 32S + 4P																		


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R. GRZYBOWSKI 29APR05	TE Connectivity	
DIMENSIONS: INCHES		CHK M. PERCHERKE 29APR05		
		APVD M. PERCHERKE	NAME	
		PRODUCT SPEC	VERTICAL RECEPTACLE ASSEMBLY WITH GUIDES MULTI-BEAM XL	
MATERIAL		TOLERANCES UNLESS OTHERWISE SPECIFIED:	SIZE	
		0 PLC $\pm .$ 1 PLC $\pm .01$ 2 PLC $\pm .01$ 3 PLC $\pm .005$ 4 PLC $\pm .0020$ ANGLES $\pm 2^\circ$ FINISH	CAGE CODE DRAWING NO	
			RESTRICTED TO	
			A100779	
			C=6450540	
			K9	
			SCALE 2:1	
			SHEET 12 OF 19	
			CUSTOMER DRAWING	

LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN
ES	00	-	-	SEE SHEET 1	-	-


PART NUMBER	ROWS		POWER										SIGNAL						POWER										
			P20	P19	P18	P17	P16	P15	P14	P13	P12	P11	6	5	4	3	2	1	P10	P9	P8	P7	P6	P5	P4	P3	P2	P1	
5-6450540-0	D C B A		GS	GS	GS	GS	GS	GS	GS	GS	GS	AP AP AP AP AP AP						GS	GS	GS	GS	GS	GS	GS	GS	GS	GS	GS	GS
												AP AP AP AP AP AP																	
												AP AP AP AP AP AP																	
												AP AP AP AP AP AP																	
10P + 24S + 10P																													

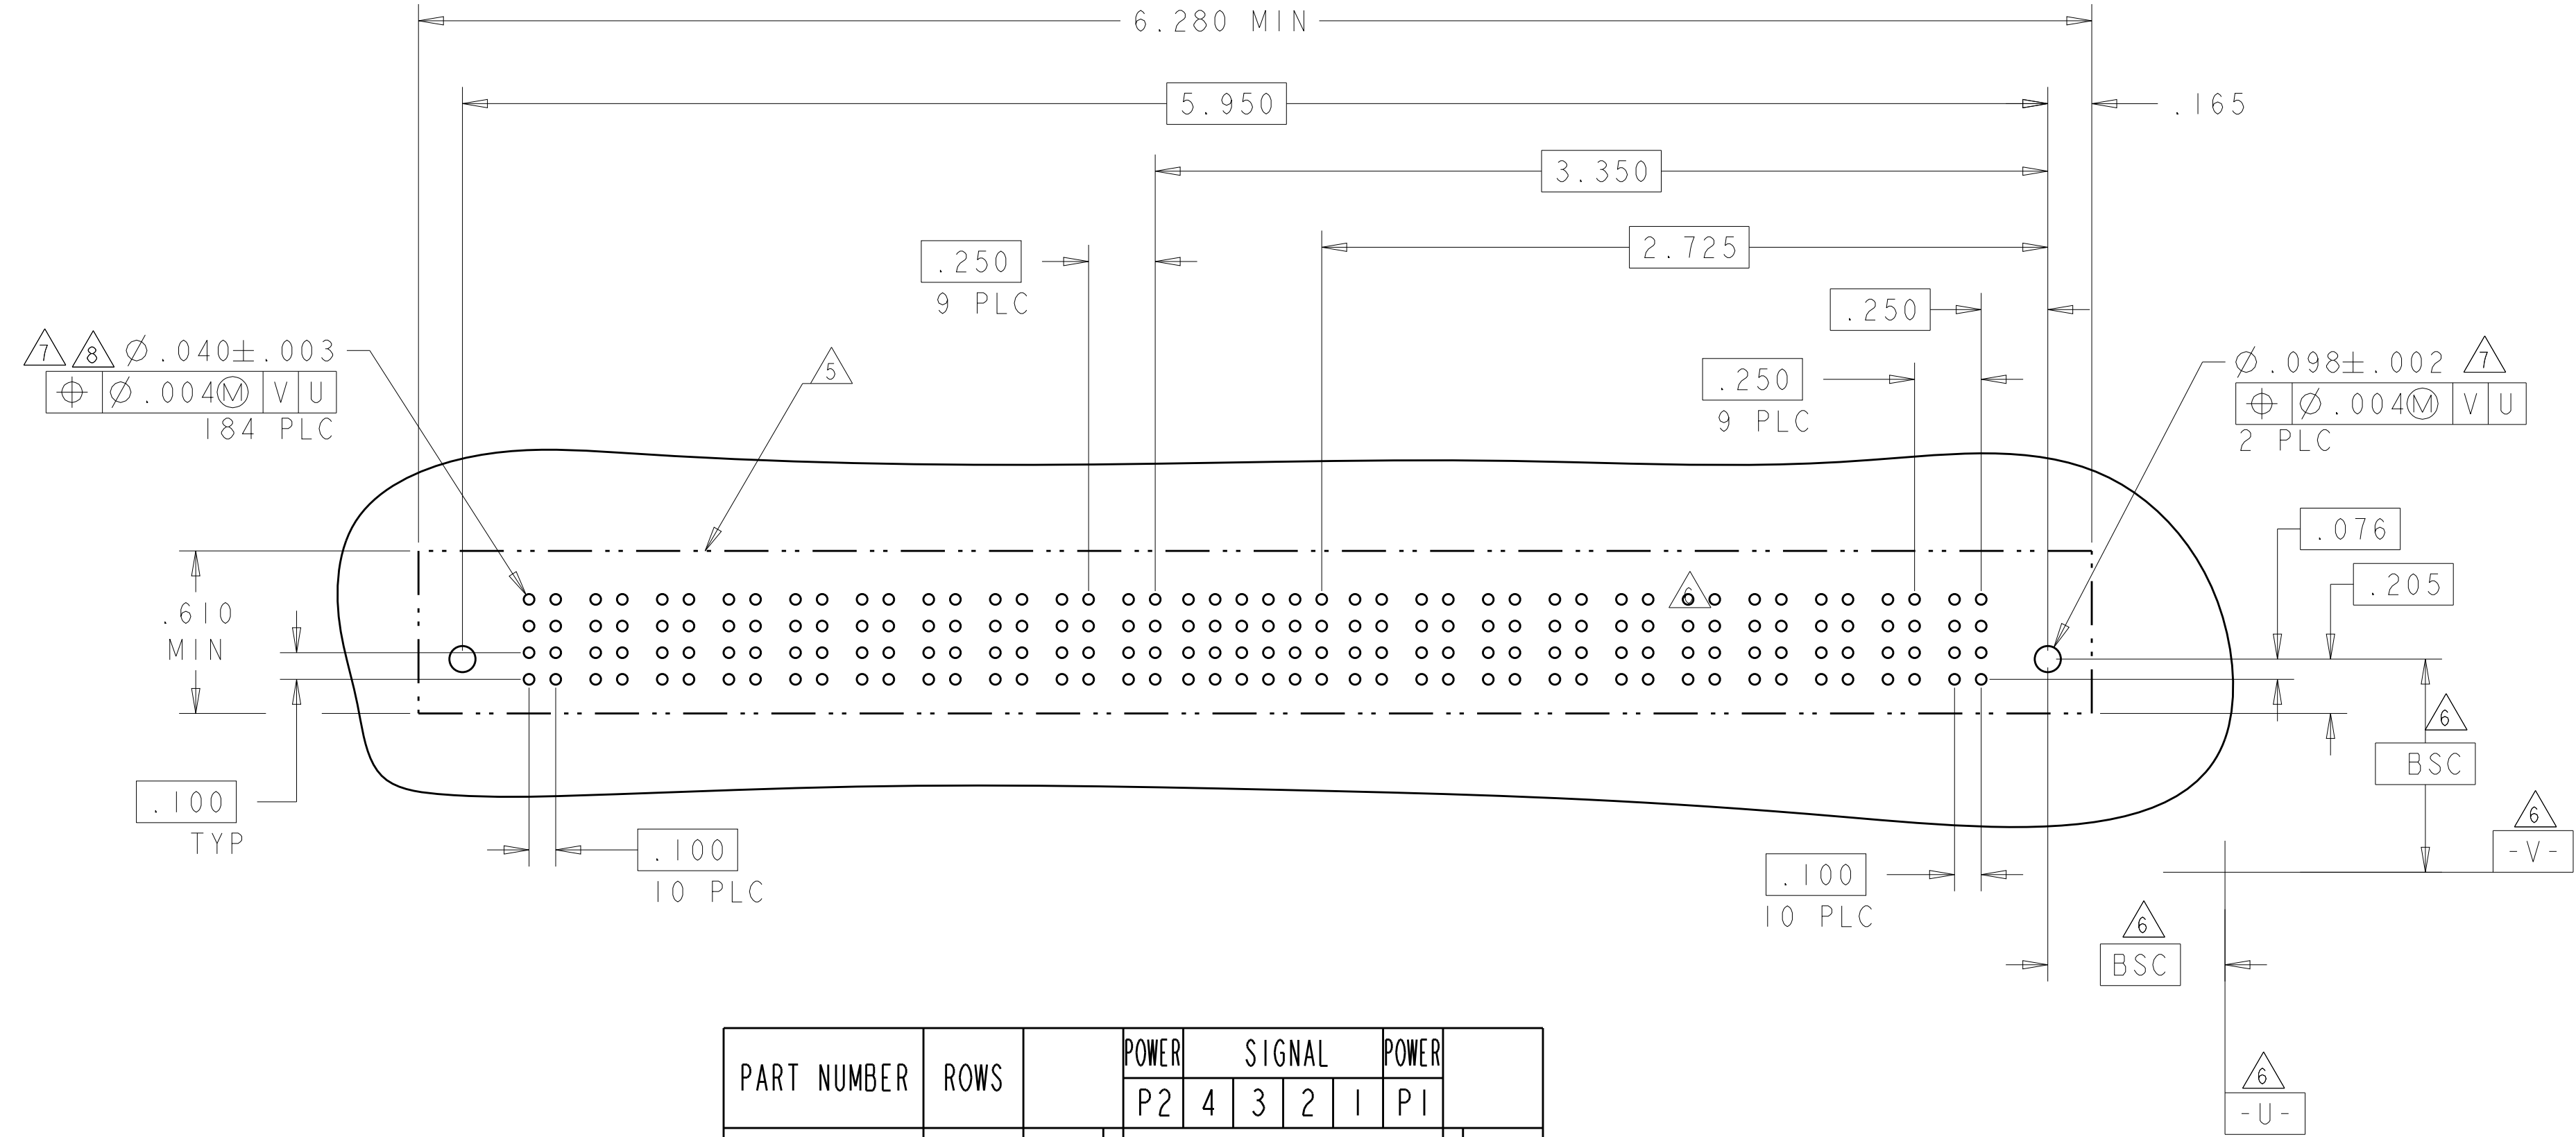

PART NUMBER	ROWS		POWER	SIGNAL				POWER	
			P2	4	3	2	1	P1	
5-6450540-2	D C B A		GS	AP	AP	AP	AP	GS	
				AP	AP	AP	AP		
				AP	AP	AP	AP		
				AP	AP	AP	AP		
1P + 16S + 1P									

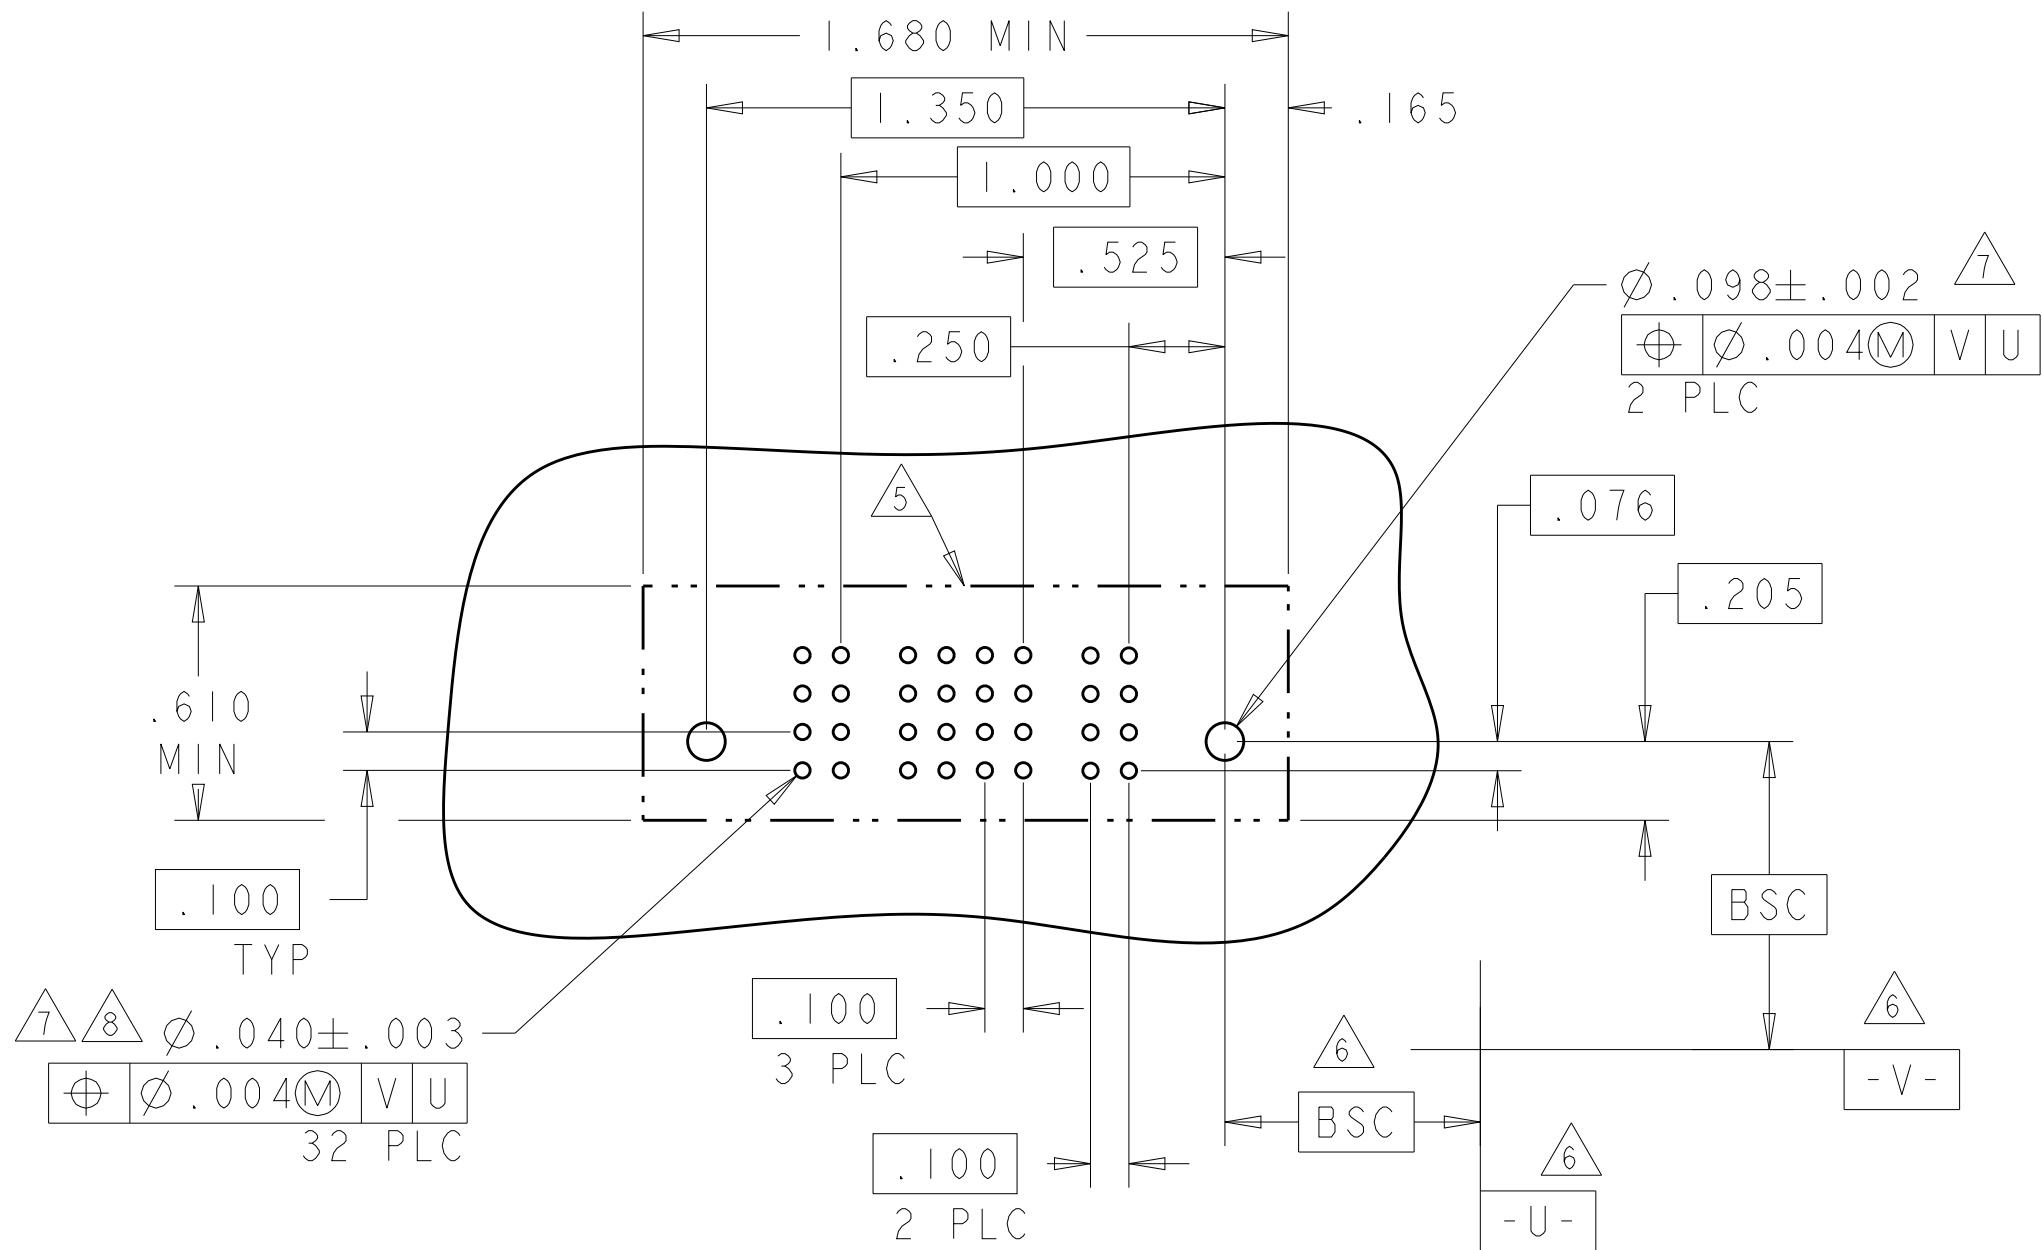

PART NUMBER	ROWS		POWER				SIGNAL						POWER				
			P8	P7	P6	P5	6	5	4	3	2	1	P4	P3	P2	P1	
5-6450540-3	D C B A						AP	AP	AP	AP	AP	AP					
							AP	AP	AP	AP	AP	AP					
							AP	AP	AP	AP	AP	AP					
							AP	AP	AP	AP	AP	AP					
4P + 24S + 4P																	

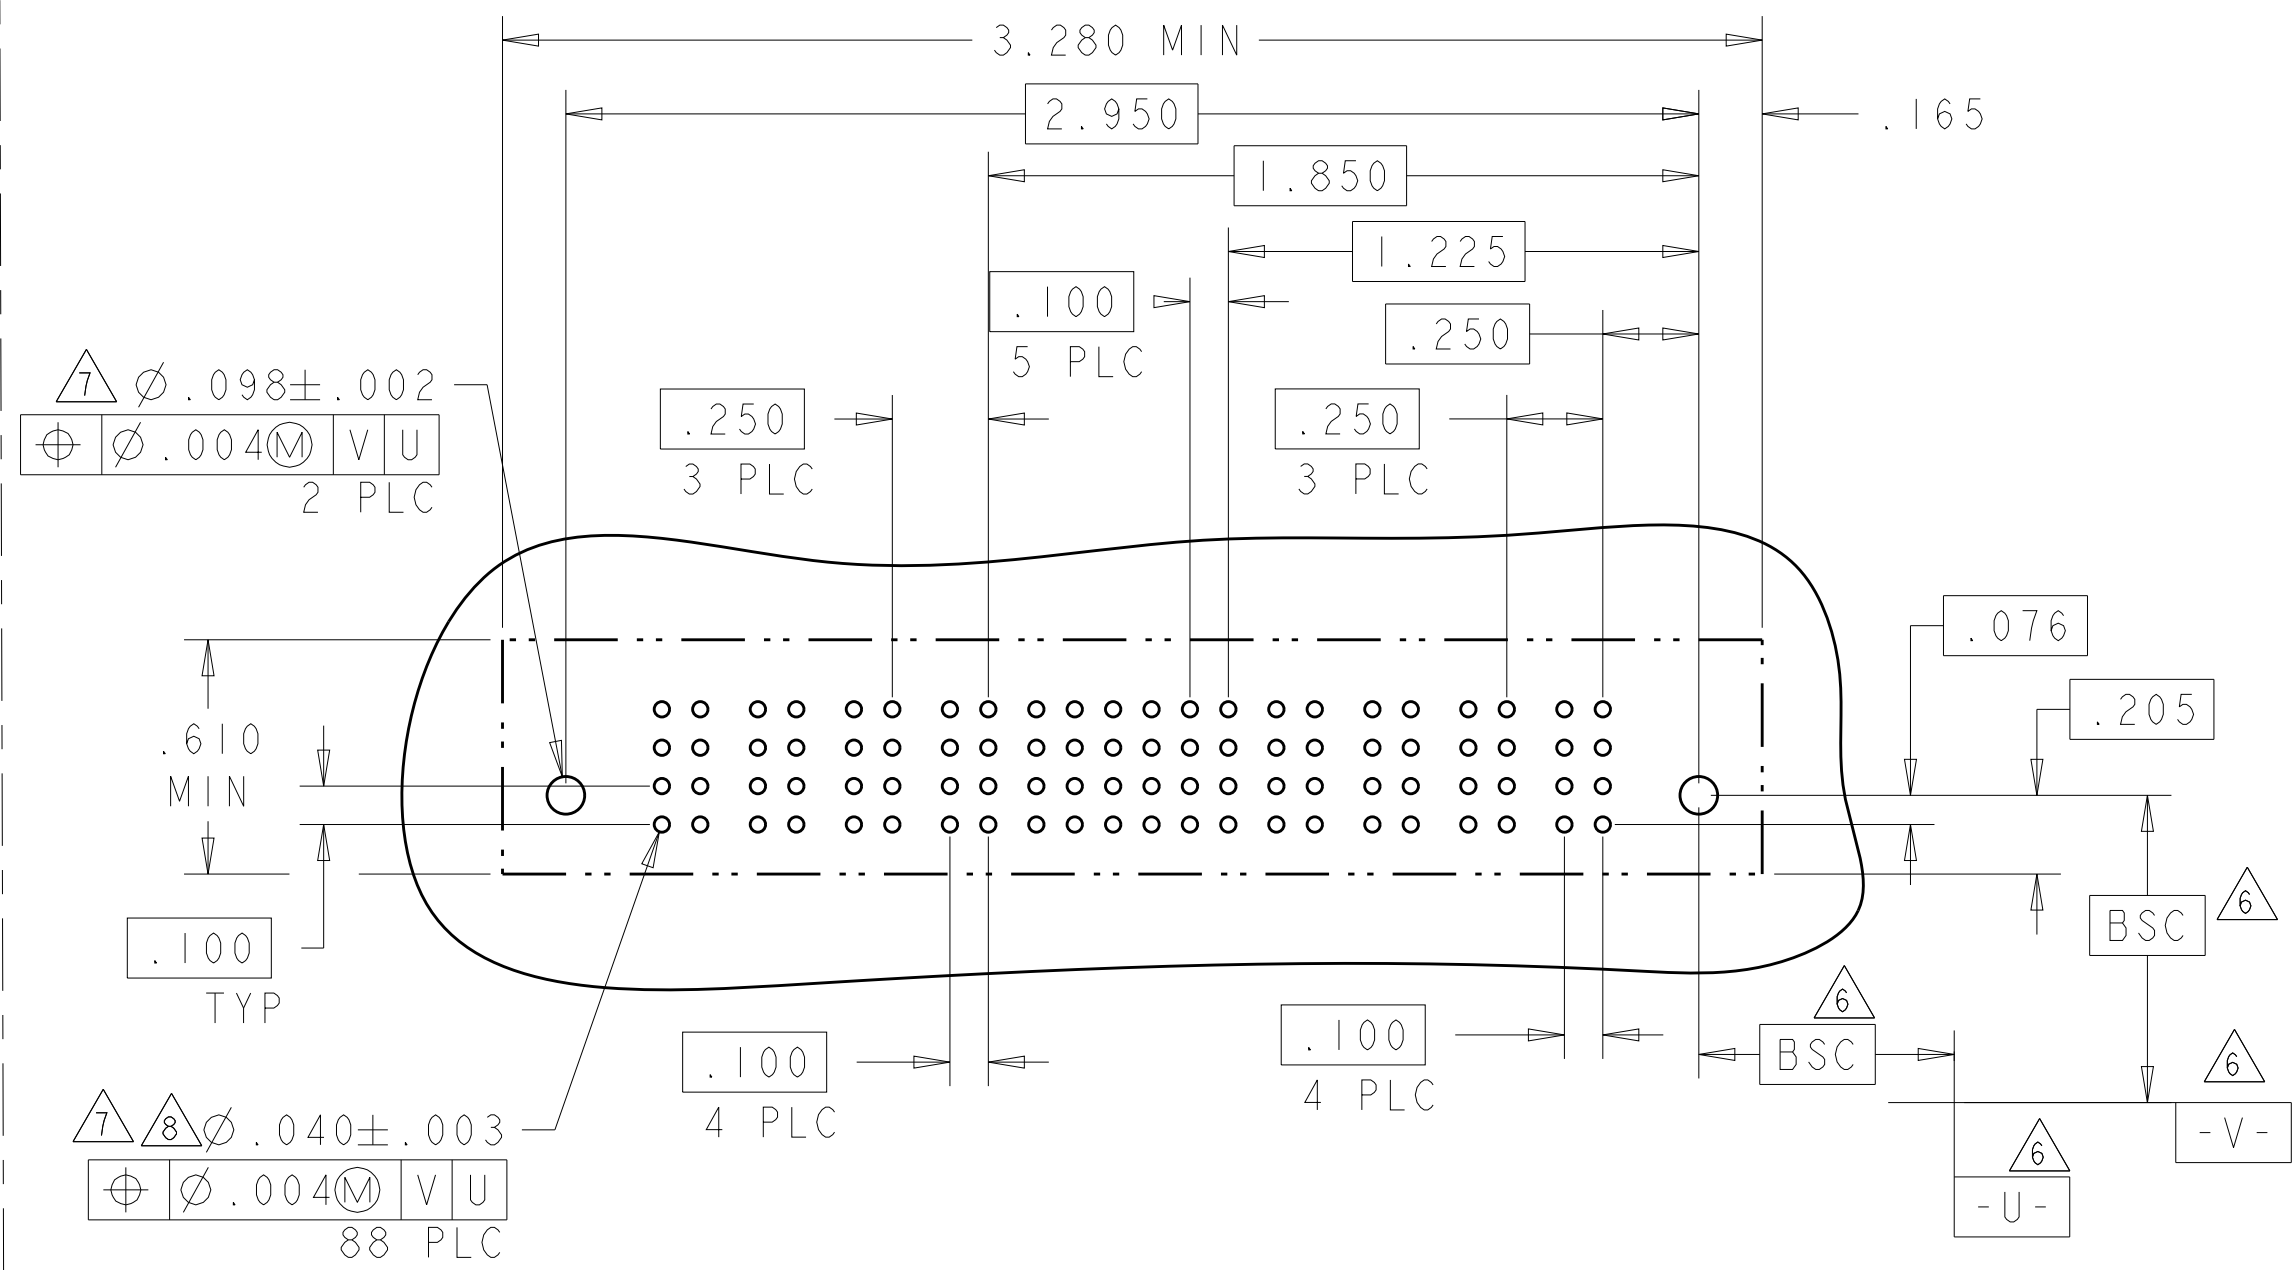

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN R.GRZYBOWSKI 29APR05
CHK M.PERCHEKKE 29APR05
APVD M.PERCHEKKE

DIMENSIONS:
INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ±.
1 PLC ±.01
2 PLC ±.01
3 PLC ±.005
4 PLC ±.0020
ANGLES ±2°
FINISH

PRODUCT SPEC 108-1973
APPLICATION SPEC 114-13038
WEIGHT
CUSTOMER DRAWING



NAME
VERTICAL RECEPTACLE ASSEMBLY WITH GUIDES MULTI-BEAM XL

SIZE CAGE CODE DRAWING NO
A100779C=6450540

RESTRICTED TO
-


SCALE 2:1
SHEET 13 OF 19
REV K9

PART NUMBER	ROWS		POWER			SIGNAL		POWER			
			P6	P5	P4	2	1	P3	P2	P1	
5-6450540-5	D C B A										
			GS	GS	GS	AP	AP	GS	GS	GS	HD
3P + 8S + 3P											

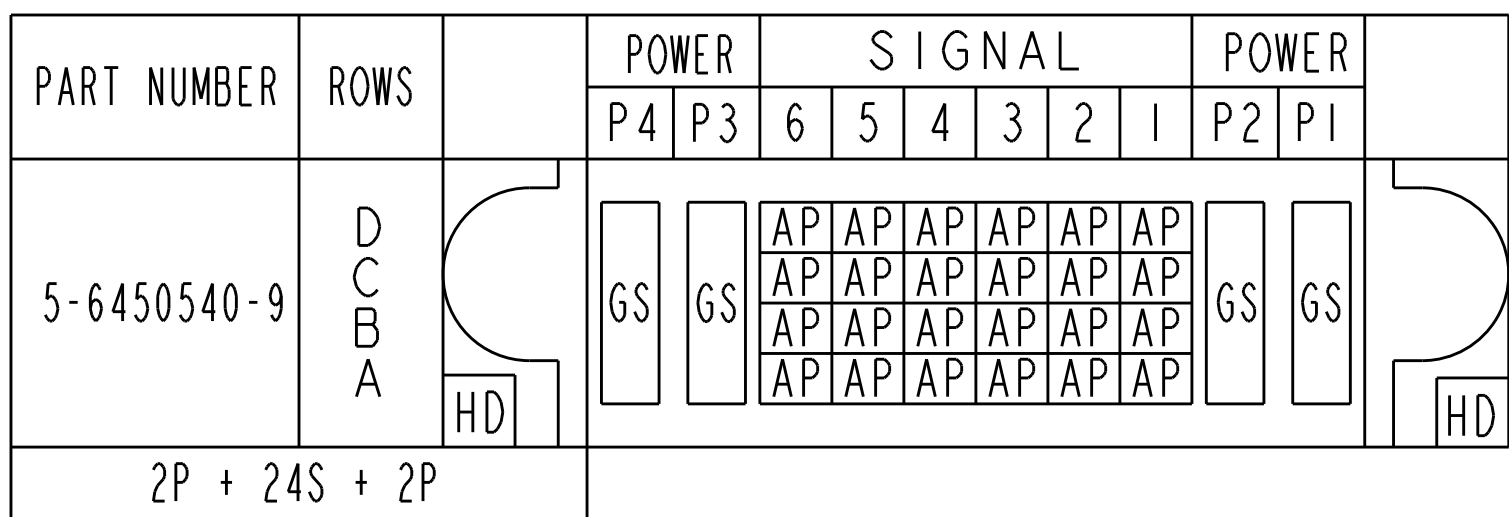
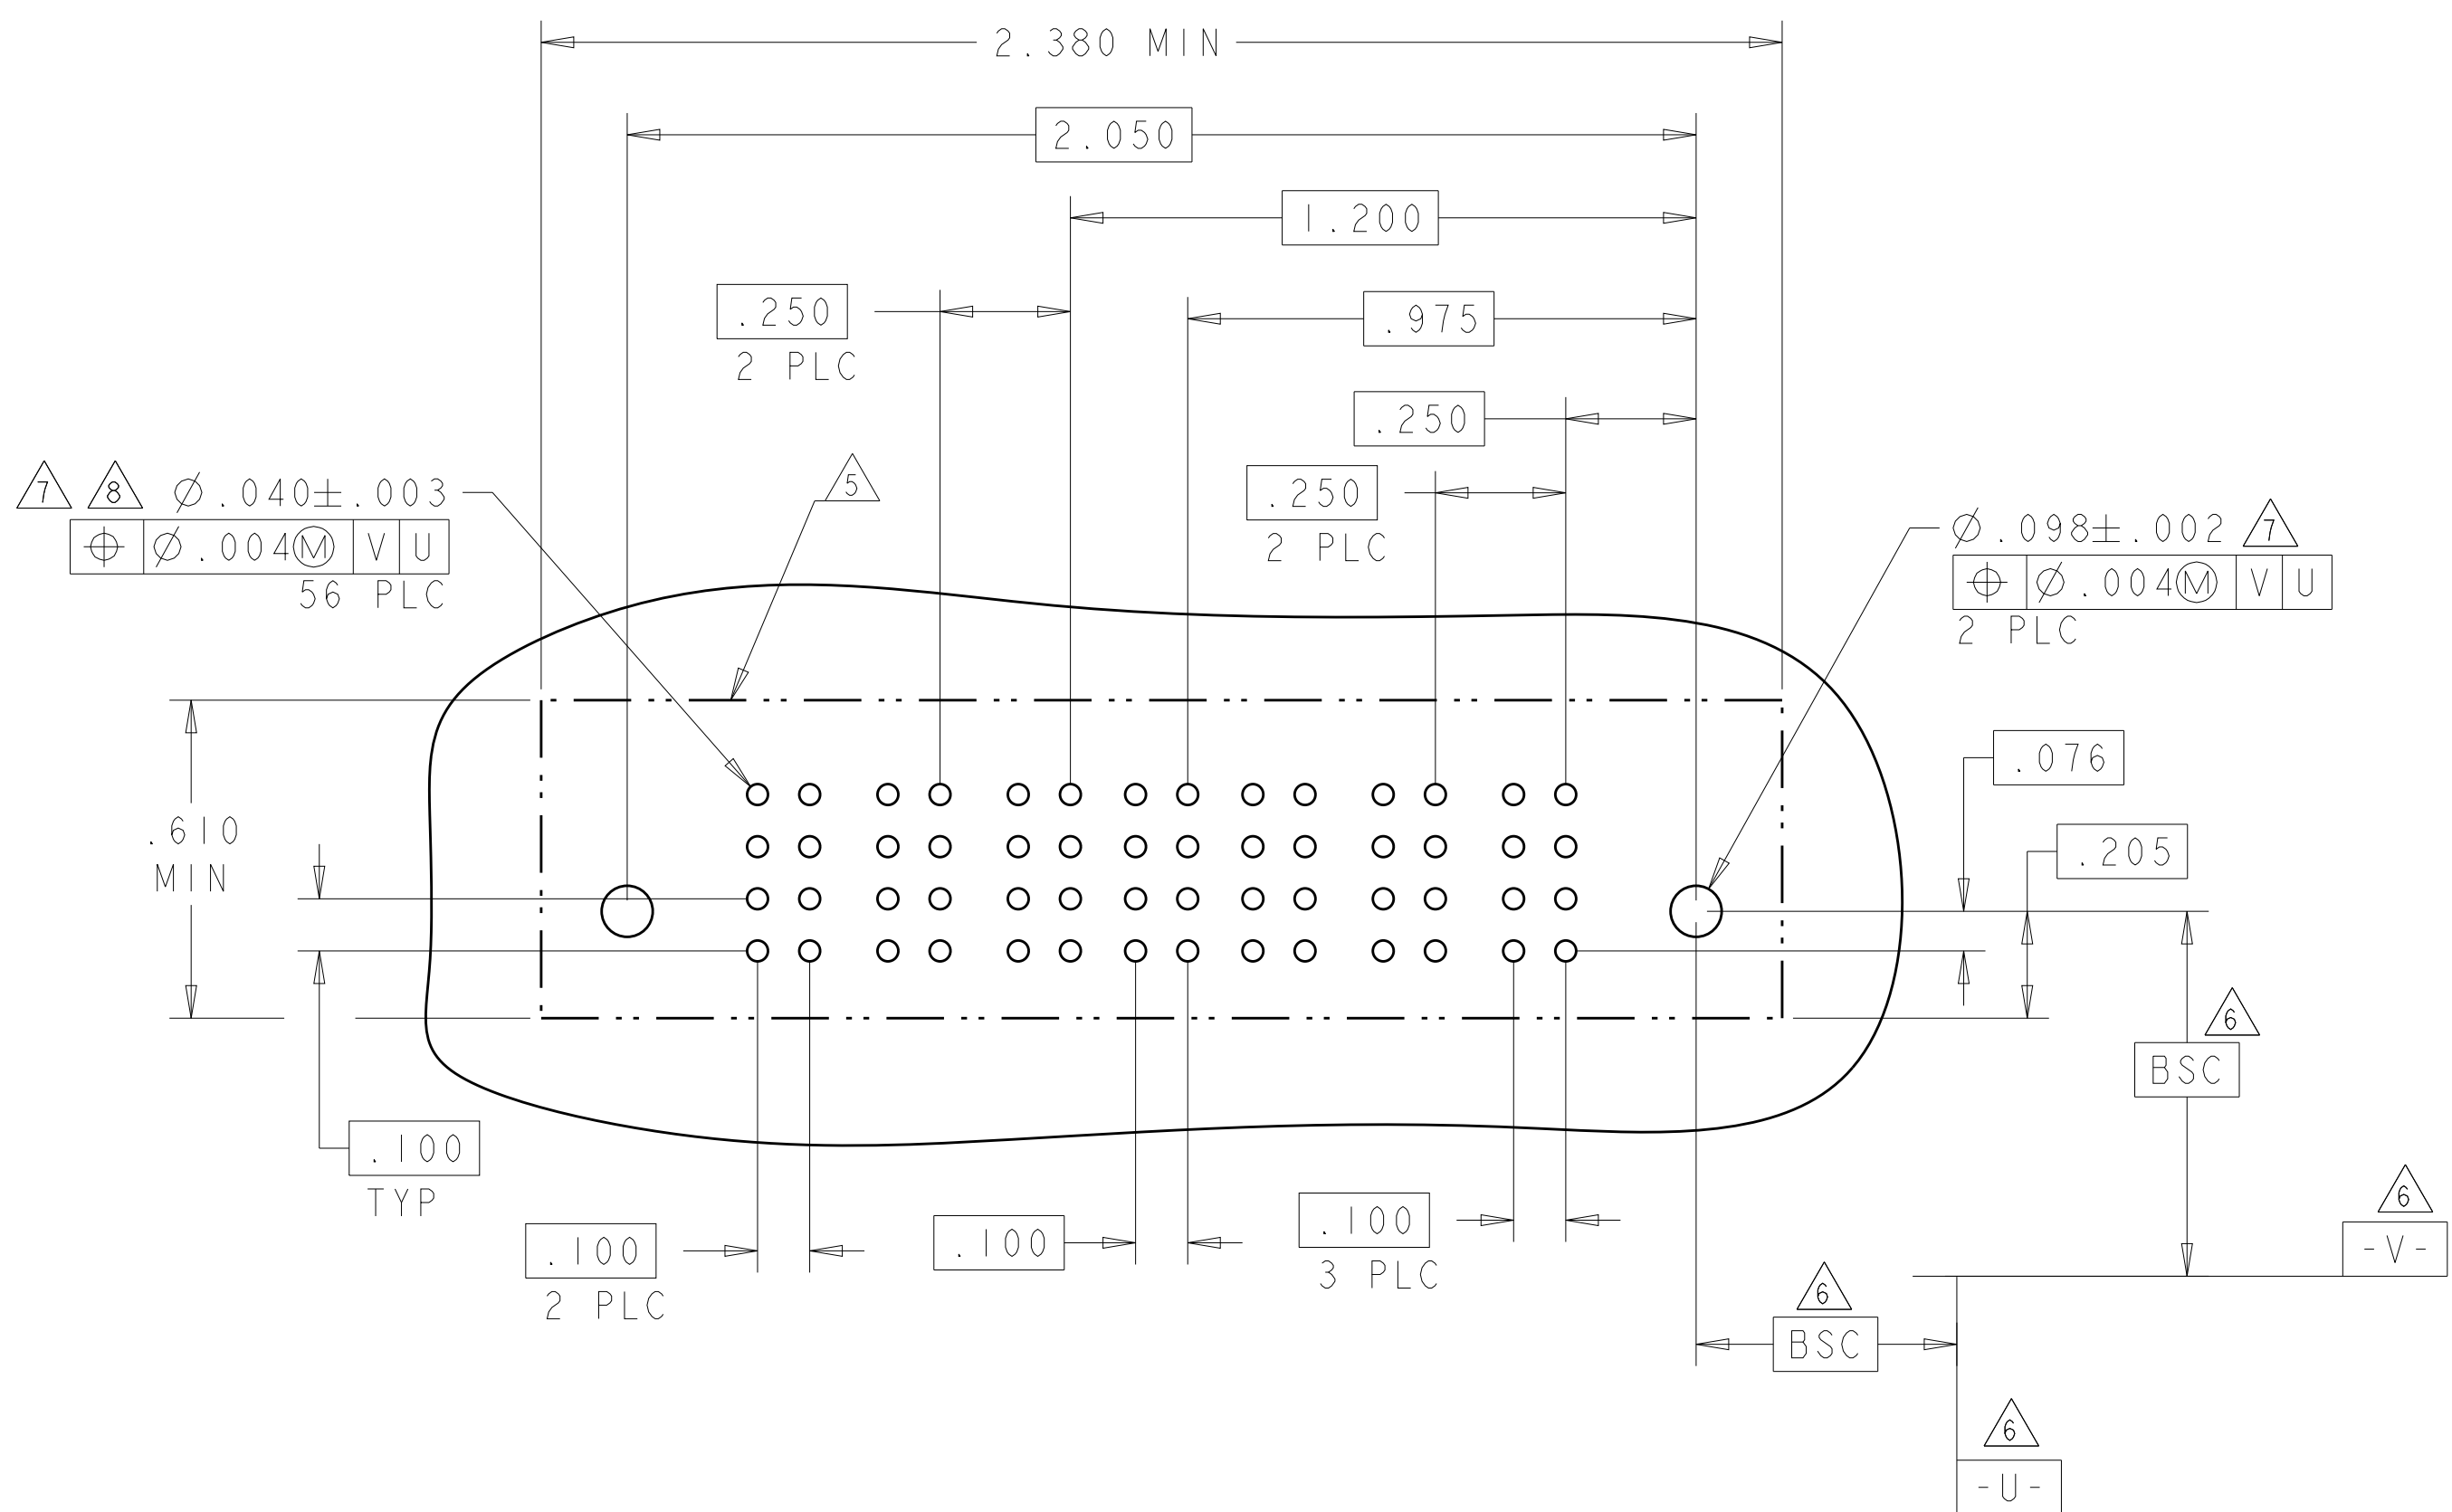
4805 (3/11)


Ⓚ

4805 (3/11)

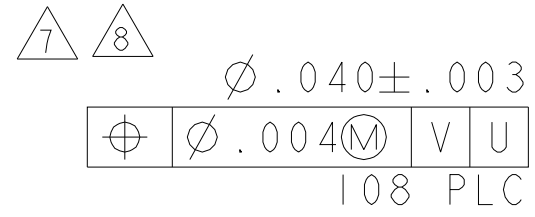-NO SIGNAL CONTACTS4805 (3/11)


LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-	-	SEE SHEET 1	-	-	-

PART NUMBER	ROWS		POWER	SIGNAL					POWER	
			P2	5	4	3	2	1	PI	
6-6450540-2	D C B A	 			AP	AP	AP			 
					AP	AP	AP			
					AP	AP	AP			
					AP	AP	AP			
IP + 20S + IP										

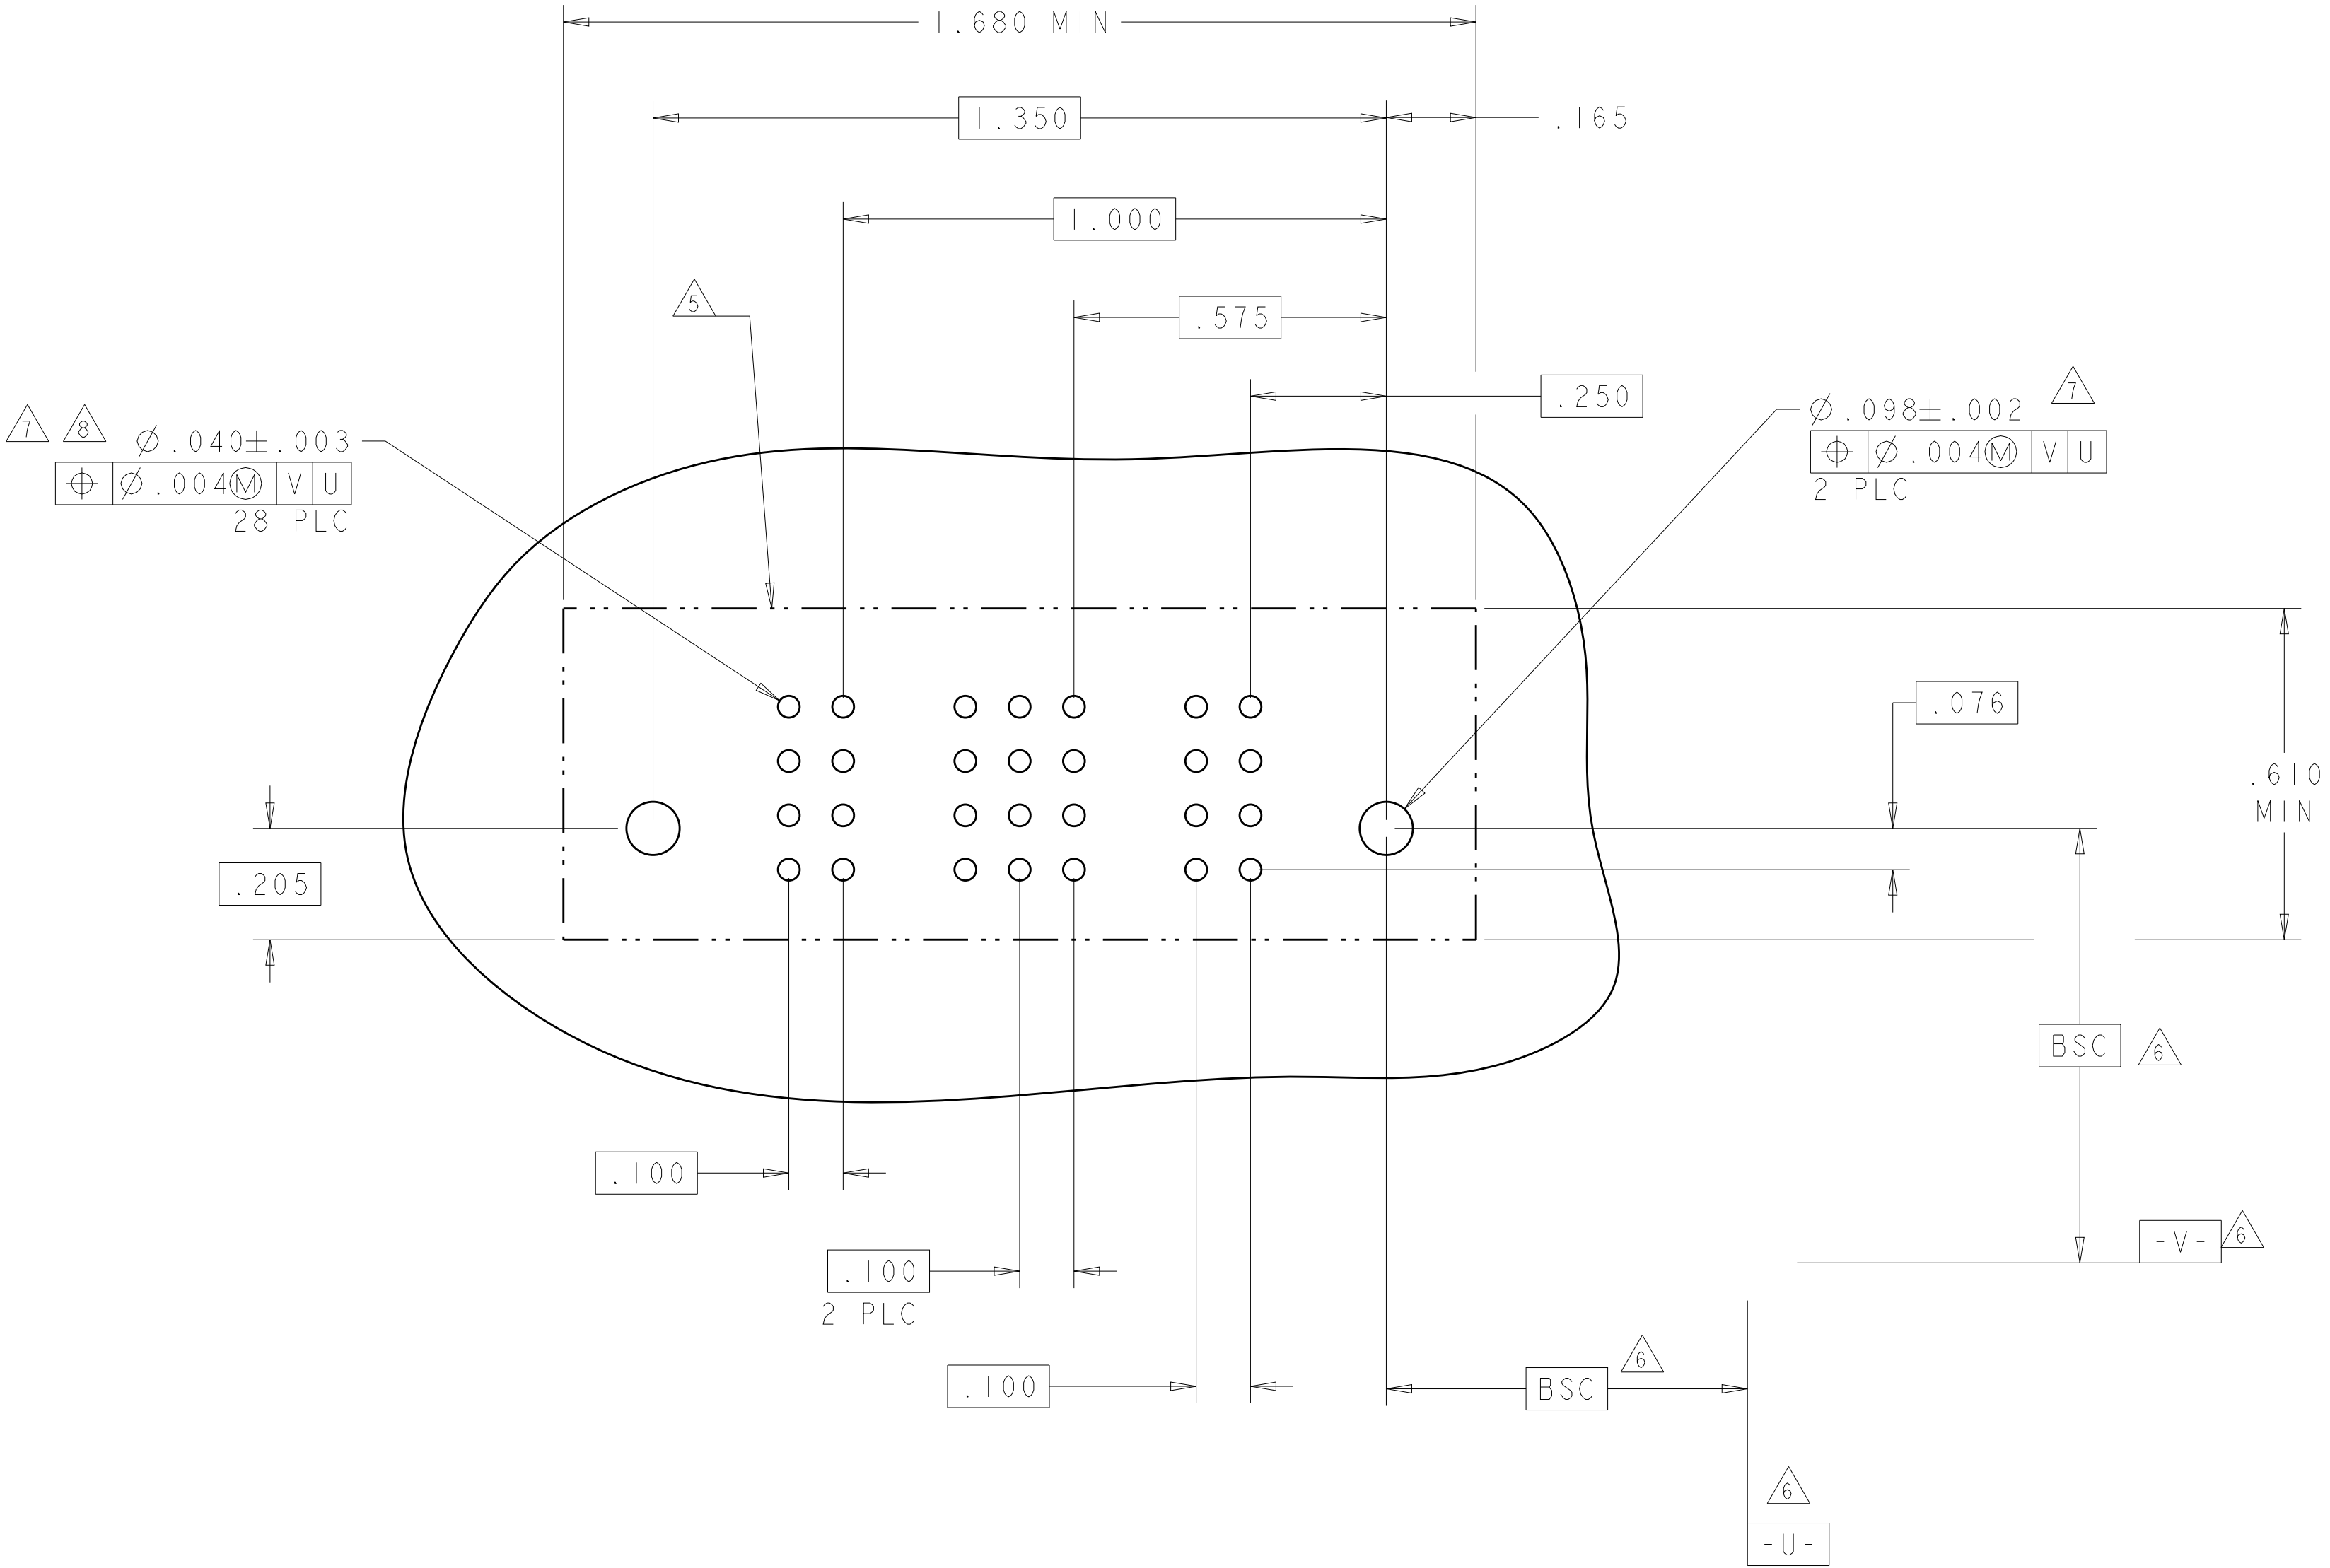

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R.GRZYBOWSKI	29APR05		
		CHK M.PERCHEKKE	29APR05		
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	
		0 PLC	±"	PRODUCT SPEC	
		1 PLC	±.01	108-1973	
		2 PLC	±.01	APPLICATION SPEC	
		3 PLC	±.005	114-13038	
		4 PLC	±.0020	WEIGHT	
		ANGLES	#2°	A100779C=6450540	
		FINISH		RESTRICTED TO	
		CUSTOMER DRAWING		SCALE 2:1 SHEET 17 OF 19 REV K9	



PART NUMBER	ROWS		POWER									SIGNAL								POWER								
			P16	P15	P14	P13	P12	P11	P10	P9	8	7	6	5	4	3	2	1	P8	P7	P6	P5	P4	P3	P2	P1		
4-6450540-9	D	HD	GS	GS	GS	GS	GS	GS	GS	GS	AP	AP	AP	AP	AP	AP	AP	GS	GS	GS	GS	GS	GS	GS	GS	HD		
	C										AP	AP	AP	AP	AP	AP	AP										AP	
	B										AP	AP	AP	AP	AP	AP	AP										AP	AP
	A										AP	AP	AP	AP	AP	AP	AP										AP	AP
8P + 32S + 8P																												

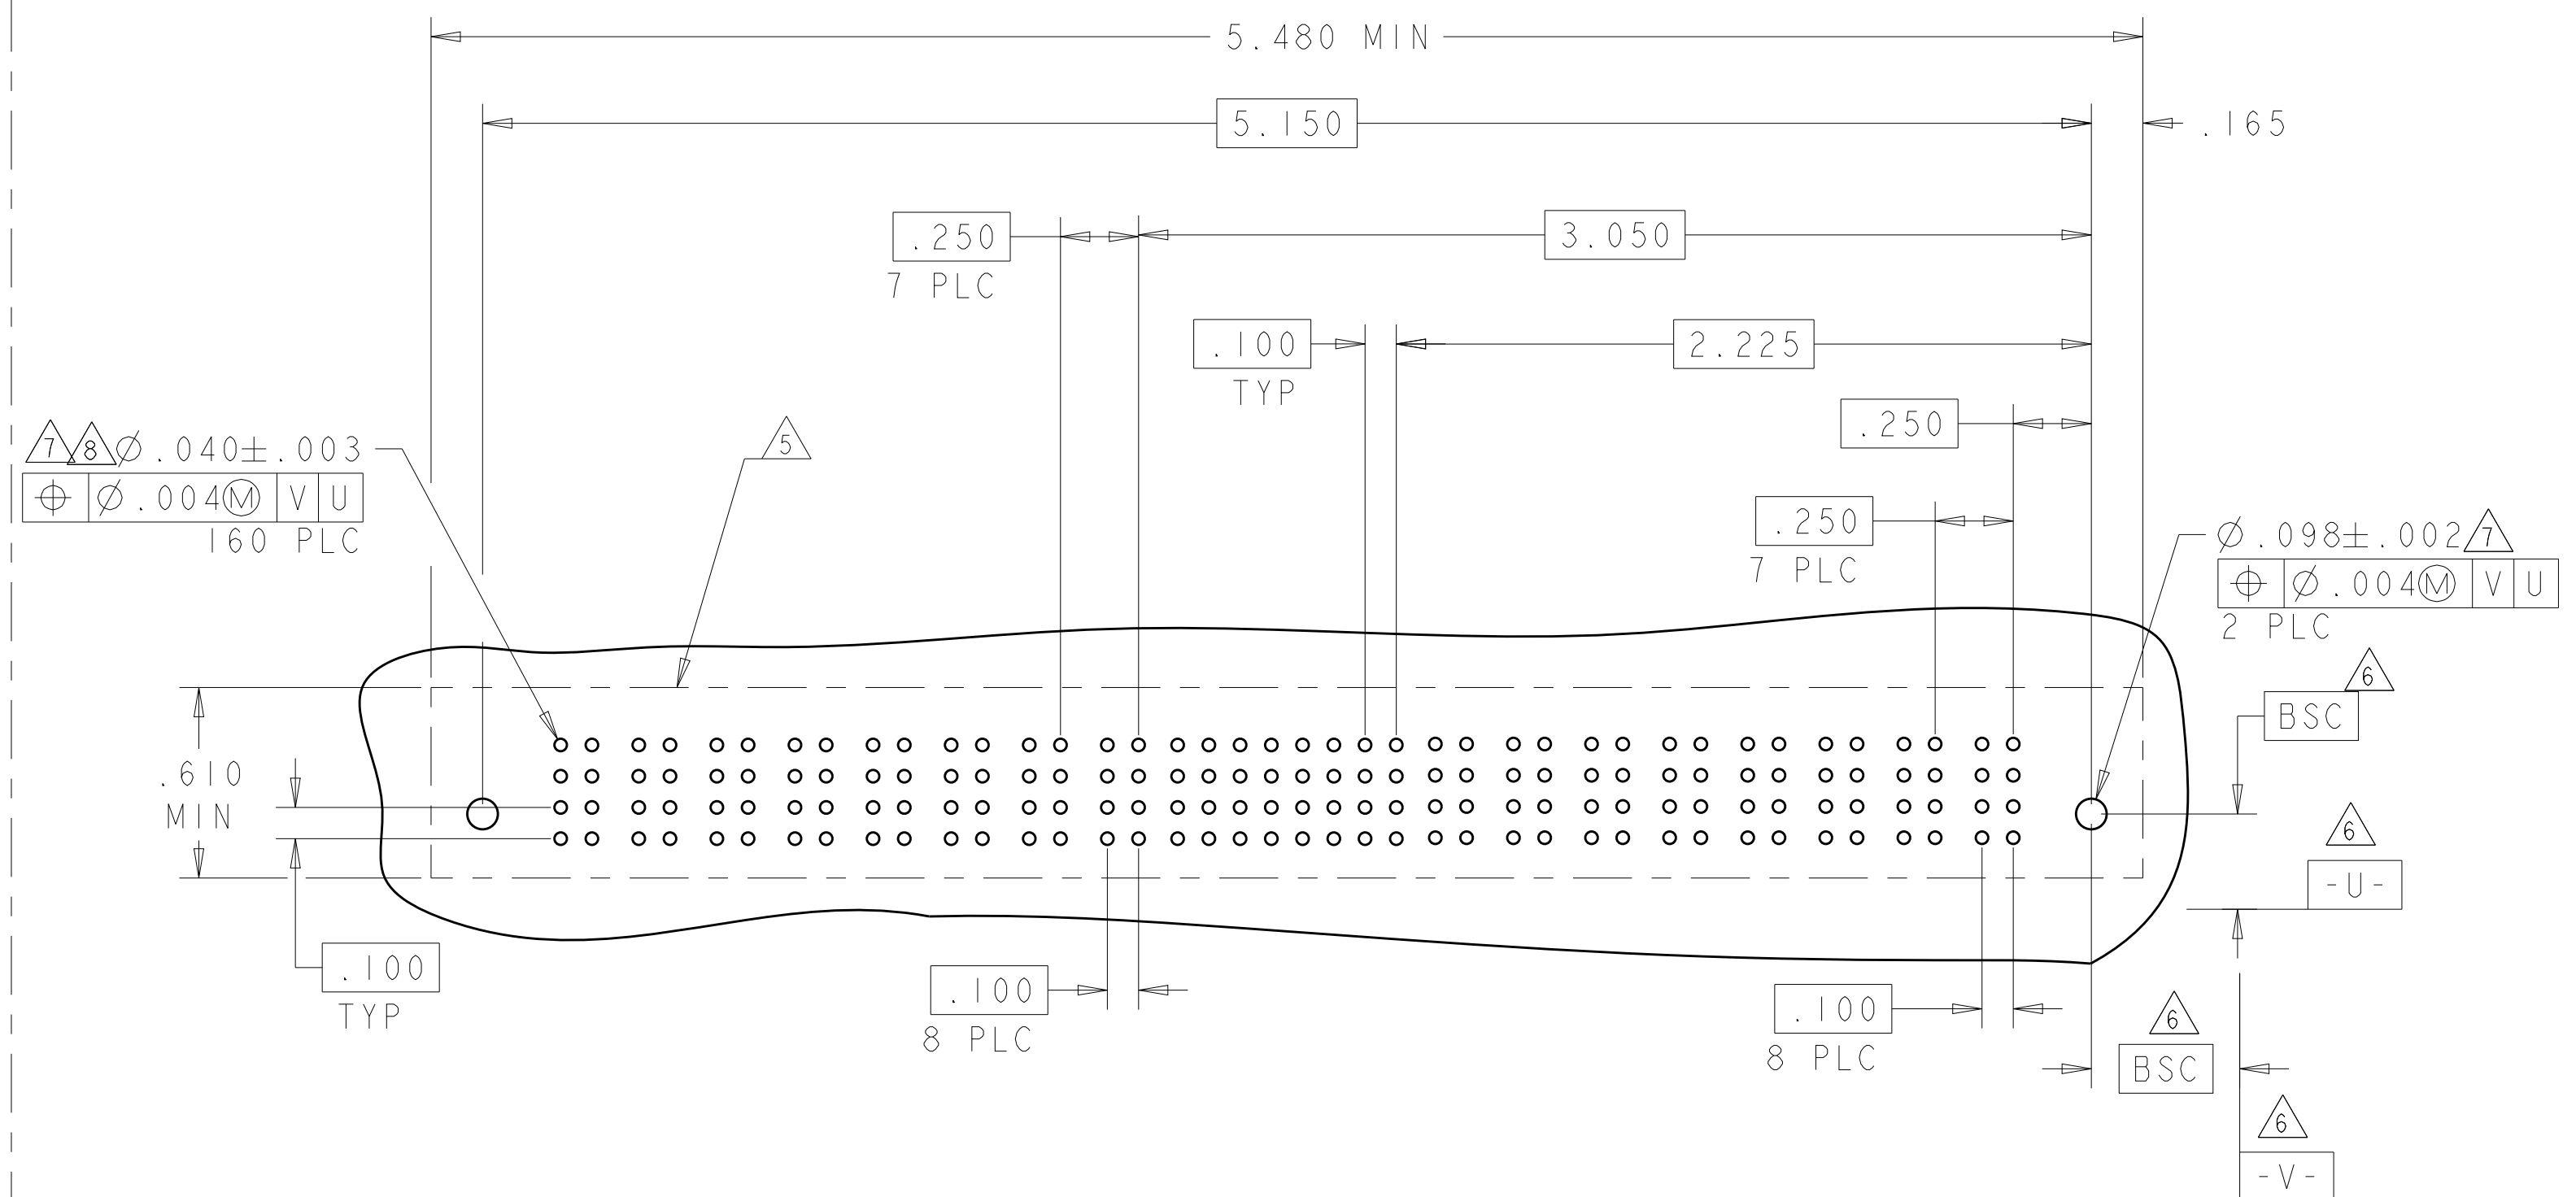4805 (3/11)

LOC		DIST		REVISIONS				
ES		00		P	LTR	DESCRIPTION		DATE
				-	-	SEE SHEET 1		-

PART NUMBER	ROWS		POWER		SIGNAL						POWER		
			P4	P3	6	5	4	3	2	1	P2	P1	
1-6450540-0	D C B A		GP	GP	AP	AP	AP	AP	AP	AP	GP	GP	
					AP	AP	AP	AP	AP	AP			
					AP	AP	AP	AP	AP	AP			
					AP	AP	AP	AP	AP	AP			
					2P + 24S + 2P								

PART NUMBER	ROWS		POWER		SIGNAL						POWER																										
			P2	5	4	3	2	1	P1																												
6-6450540-6	D C B A		GS	<table><tr><td>AP</td><td>AP</td><td>AP</td><td>AP</td><td>AP</td><td>AP</td></tr><tr><td>AP</td><td>AP</td><td>AP</td><td>AP</td><td>AP</td><td>AP</td></tr><tr><td>AP</td><td>AP</td><td>AP</td><td>AP</td><td>AP</td><td>AP</td></tr><tr><td>AP</td><td>AP</td><td>AP</td><td>AP</td><td>AP</td><td>AP</td></tr></table>								AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	GS	
				AP	AP	AP	AP	AP	AP																												
				AP	AP	AP	AP	AP	AP																												
				AP	AP	AP	AP	AP	AP																												
				AP	AP	AP	AP	AP	AP																												
IP + 20S + IP																																					

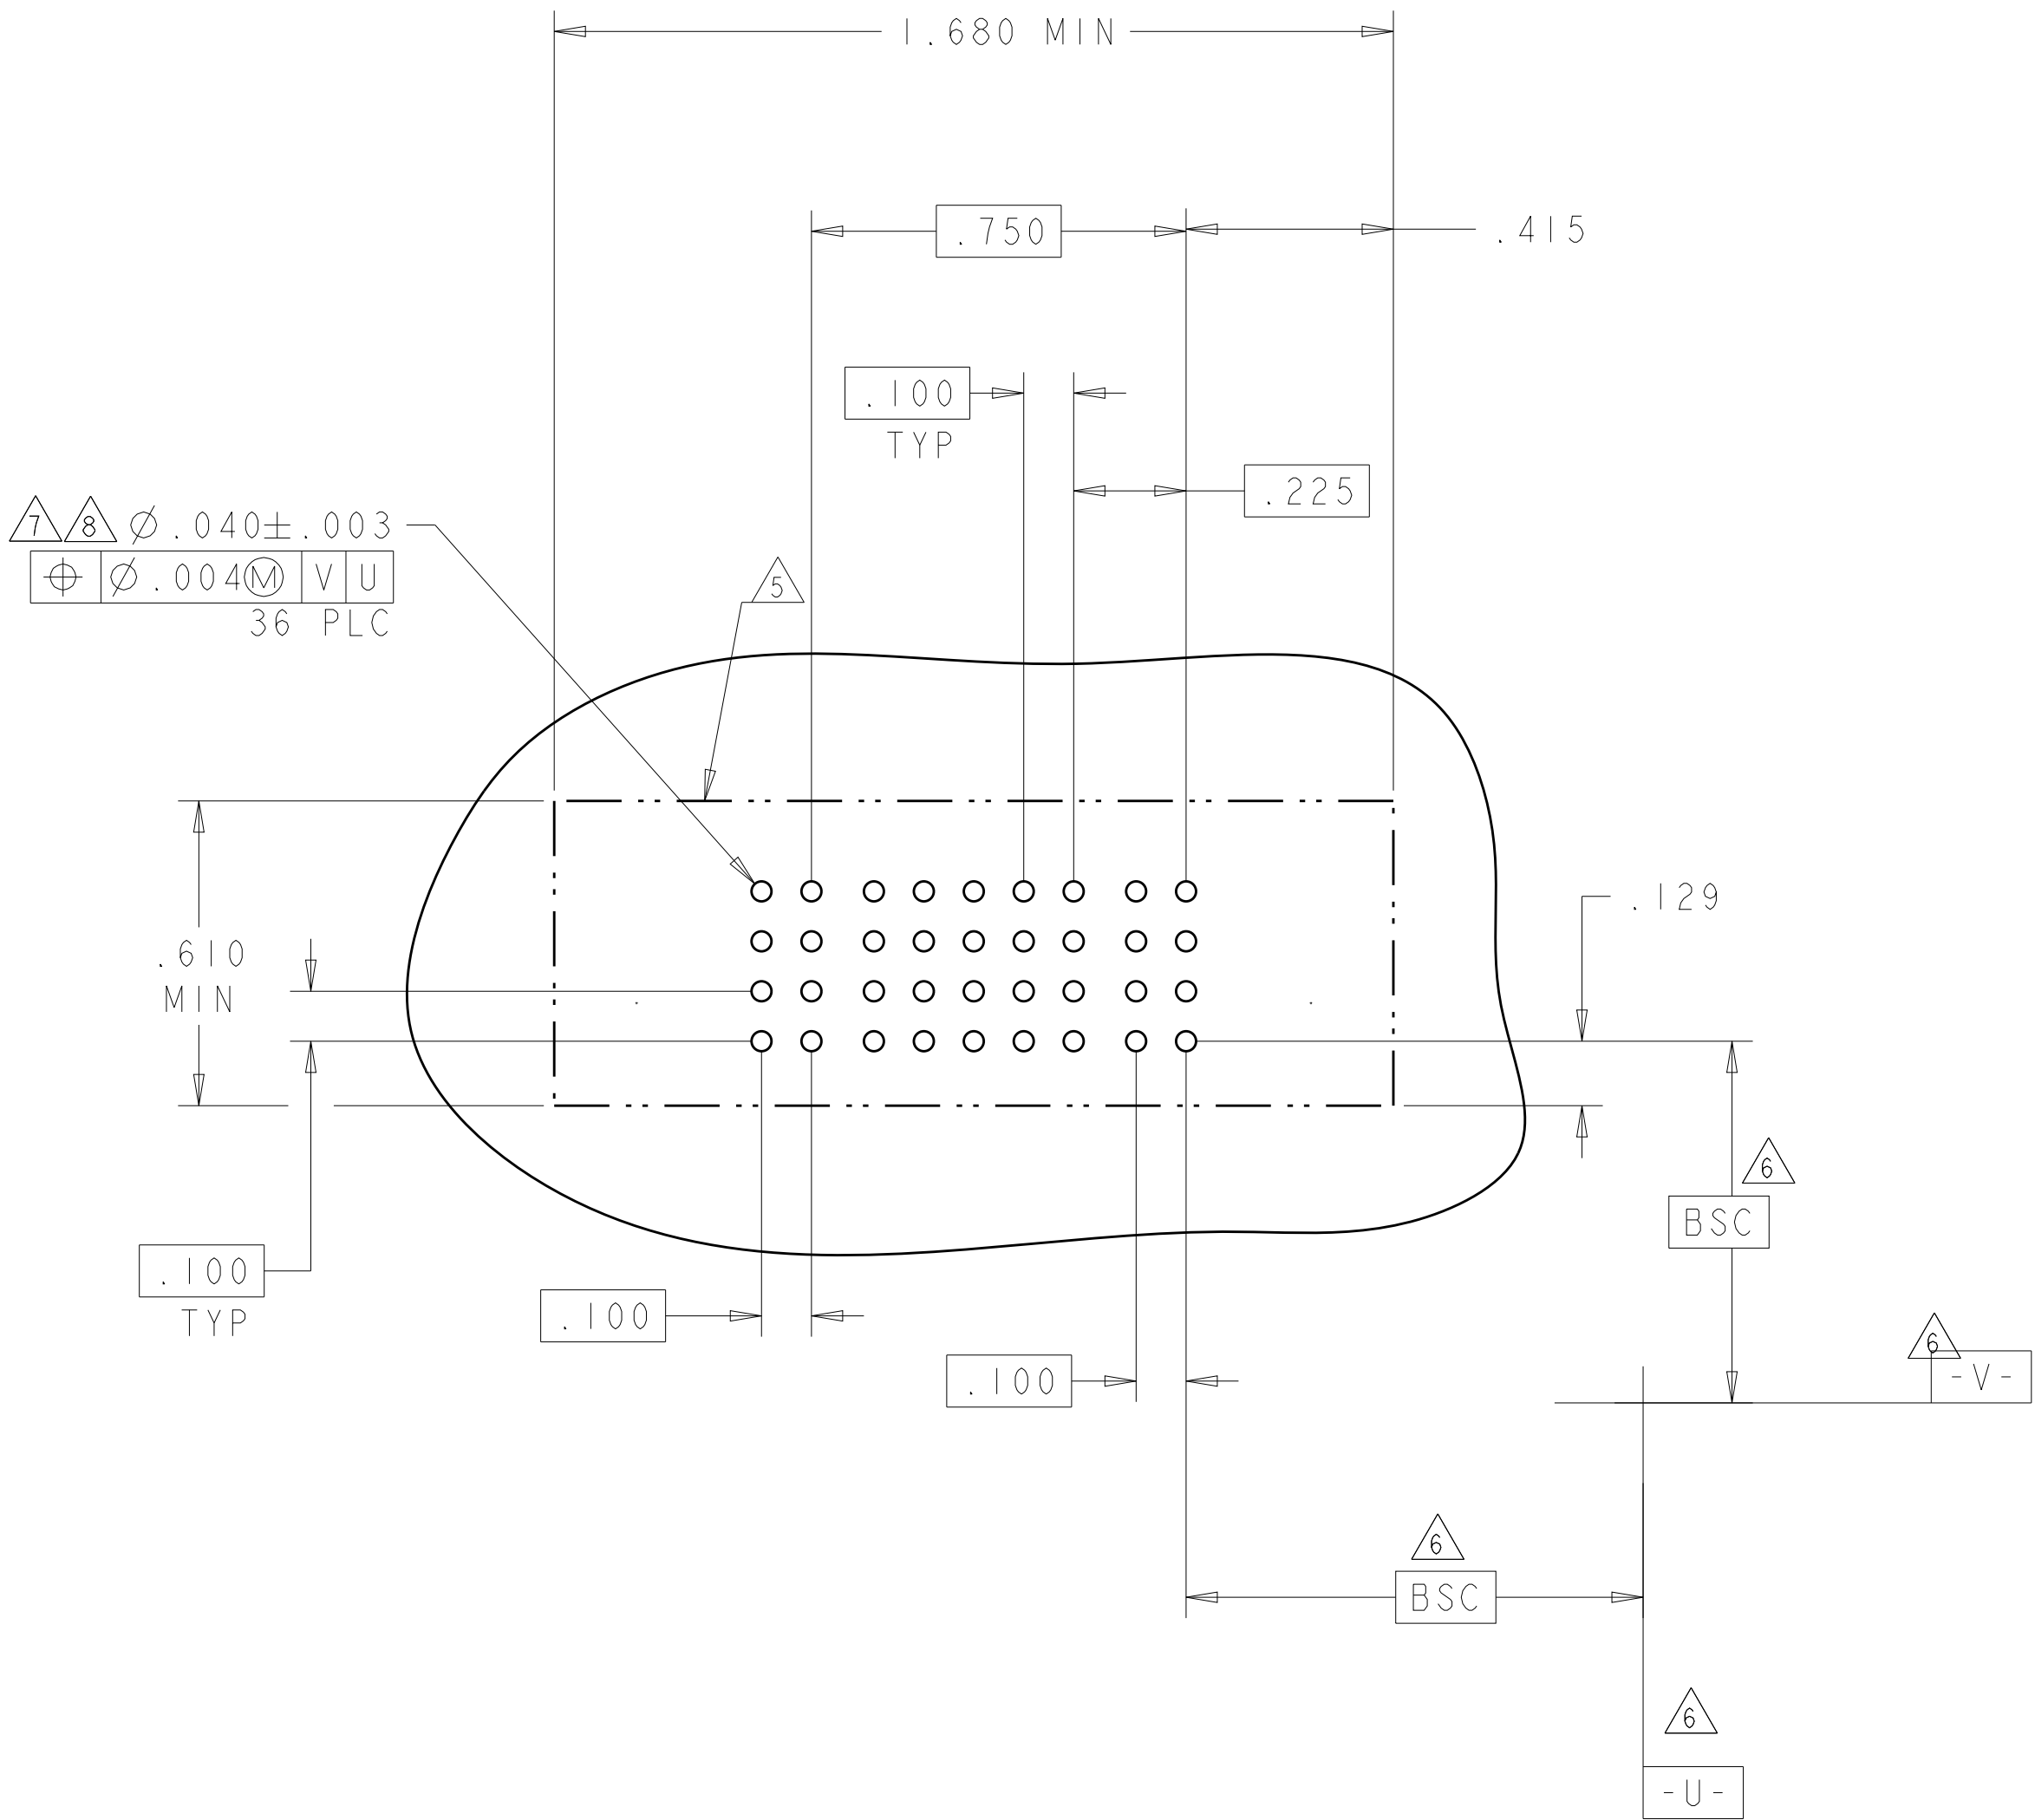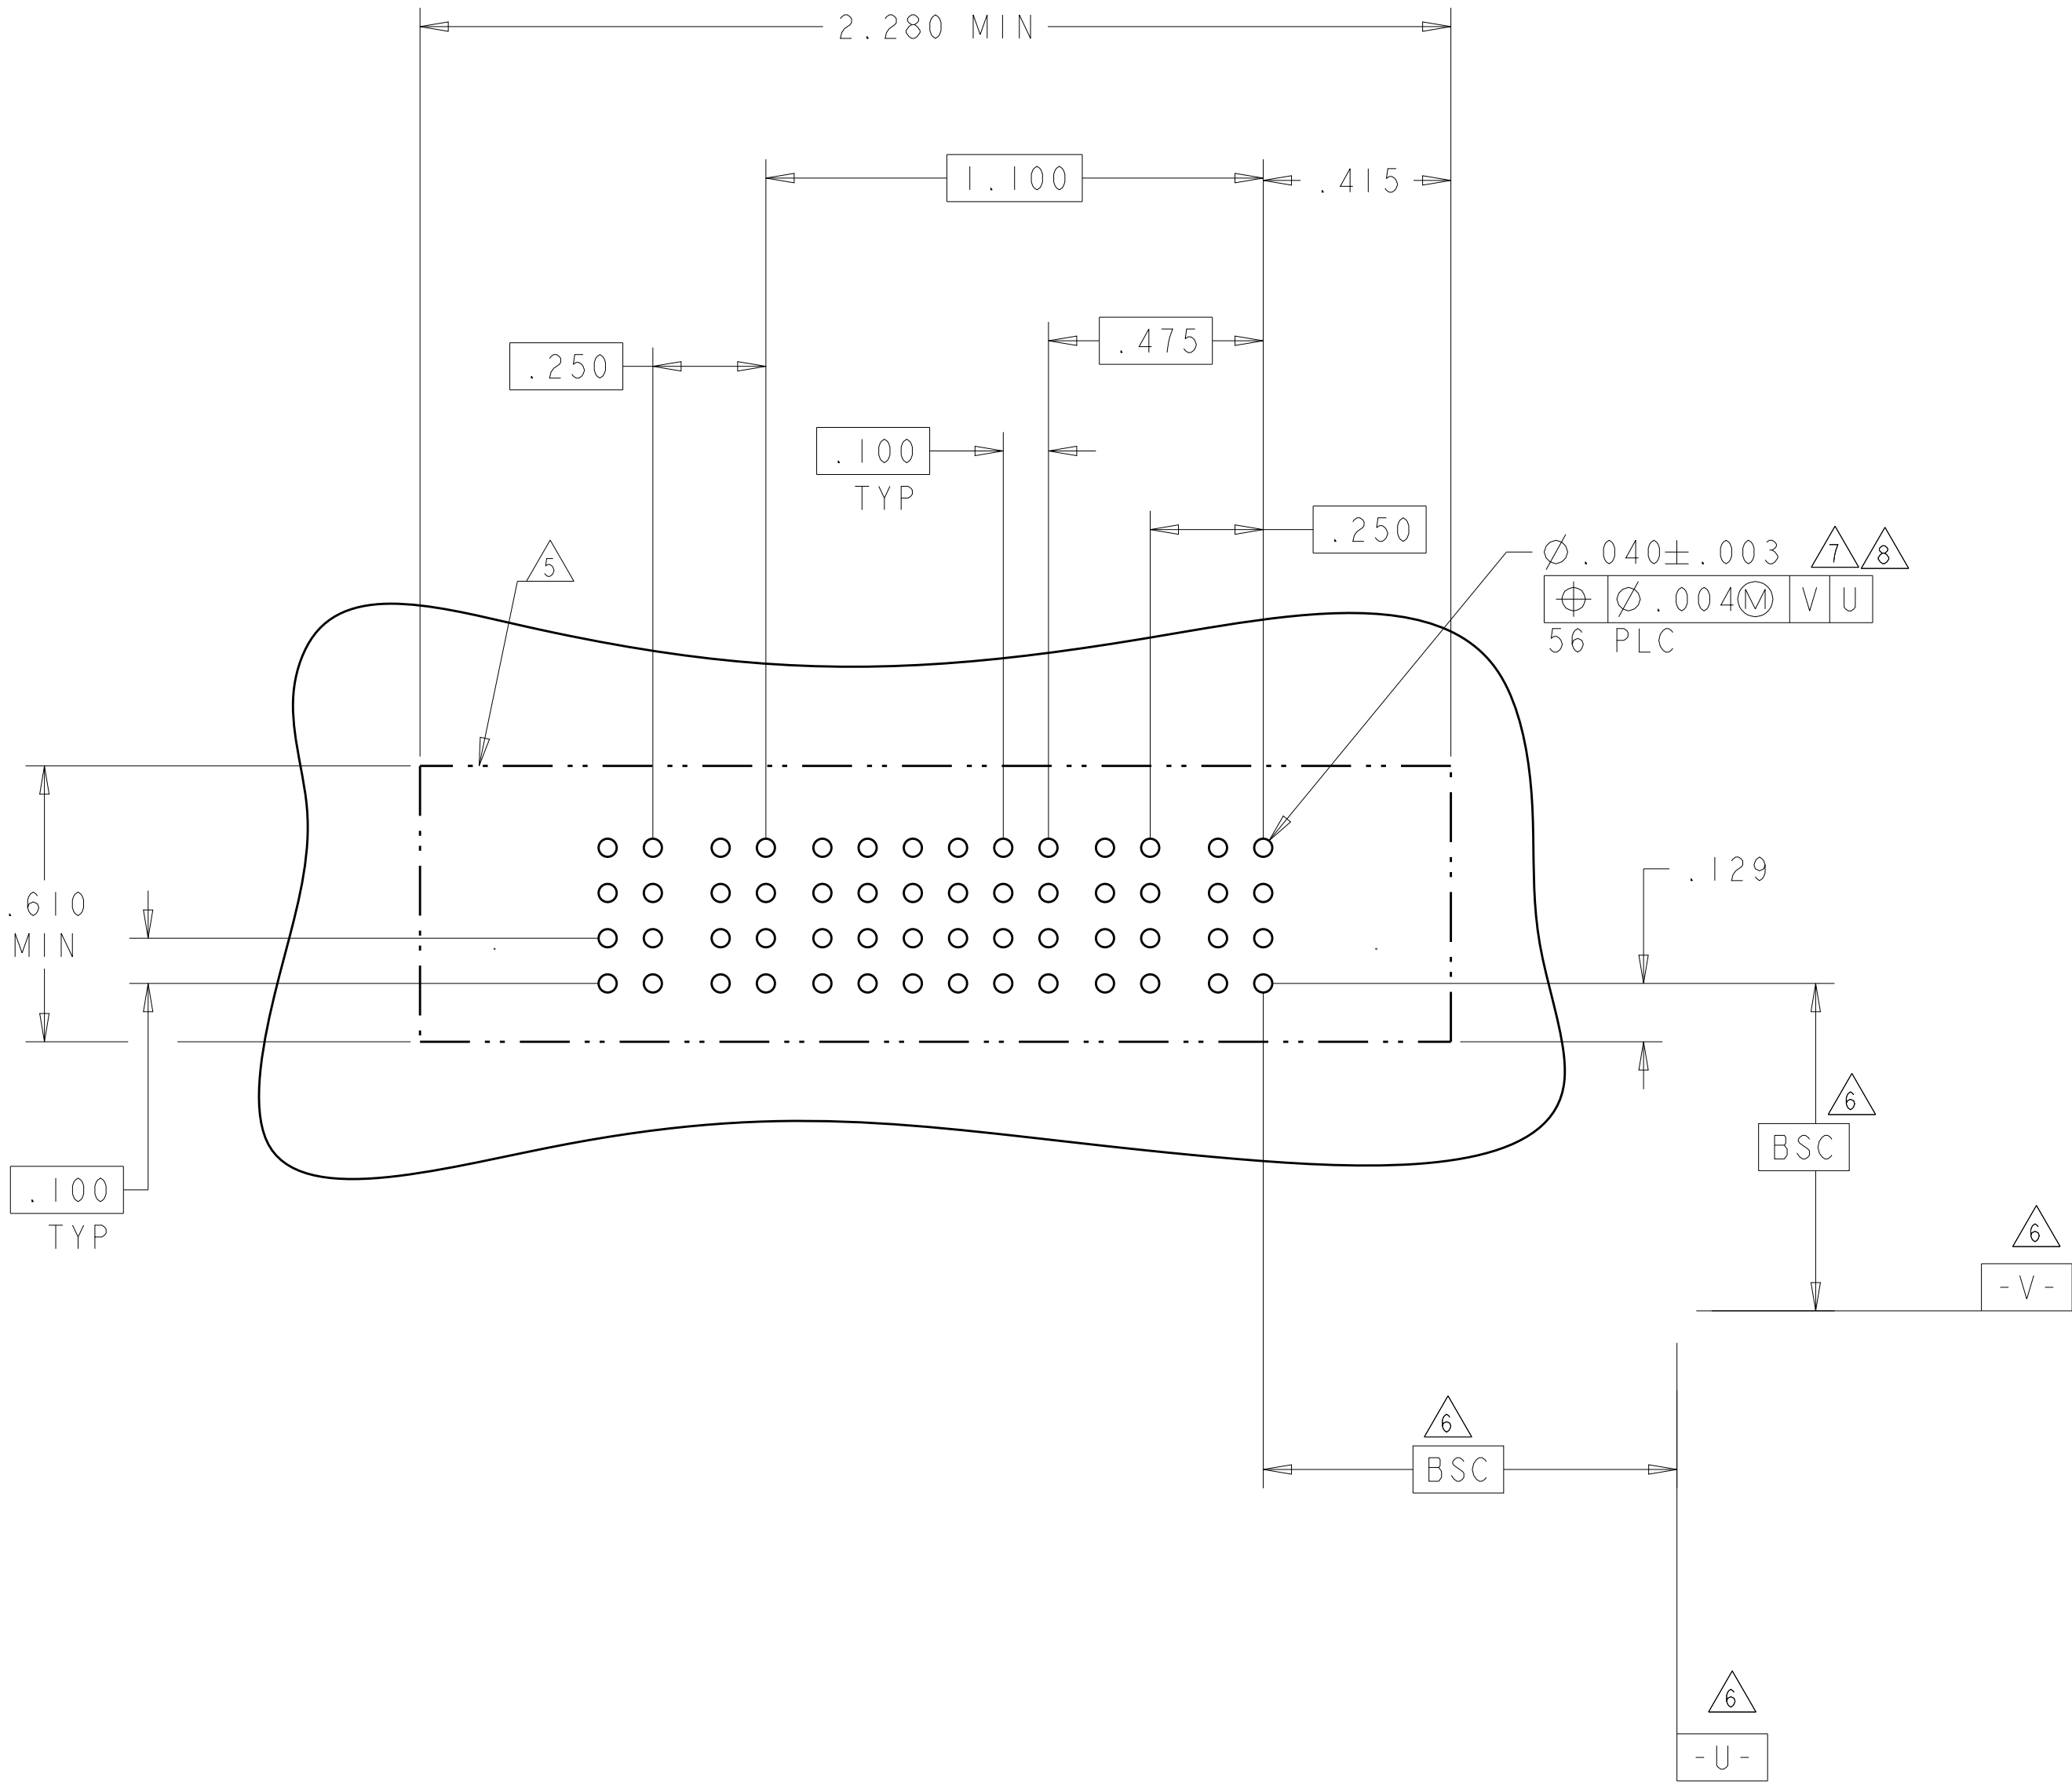

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R.GRZYBOWSKI 29APR05	 TE Connectivity		
		CHK M.PERCHERKE 29APR05			
DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD M.PERCHERKE -	NAME	VERTICAL RECEPTACLE ASSEMBLY WITH GUIDES MULTI-BEAM XL	
	0. PLC ±.1	PRODUCT SPEC	SIZE	CAGE CODE	DRAWING NO
	2. PLC ±.1	108-1973			
	3. PLC ±.01	APPLICATION SPEC	A100779	C=6450540	RESTRICTED TO
	4. PLC ±.005	114-13038			
	4. PLC ±.0020	WEIGHT -			

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[4-6450540-2](#)