

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0908143704

Status:

Active

Overview:

Picoflex Ribbon-Cable Connectors

Description:

Picoflex PF-50 Header without PCB Pegs, Vertical, Low Profile, Surface Mount, PdNi with Gold Flash Plating, 4 Circuits, Tape and Reel, Natural

Documents:

3D Model

Drawing (PDF)

Product Specification PS-99020-0011-001 (PDF)

RoHS Certificate of Compliance (PDF)

Agency Certification

UL

E29179

Application tooling part link

Application Tooling Part Link

69008-1070

General

Product Family

Series

Application

CURRENT-MAX-NUMERIC

Comments

Overview

PITCH-MATING-NUMERIC

Product Name

UPC

PCB Headers

90814

Signal, Wire-to-Board

2.4

Low Profile, Low Profile

Picoflex Ribbon-Cable Connectors

1.27

Picoflex

800756883724

Physical

Breakaway

Circuits (Loaded)

Circuits (maximum)

Color - Resin

Durability (mating cycles max)

First Mate / Last Break

Flammability

Glow-Wire Capable

Guide to Mating Part

Keying to Mating Part

Lock to Mating Part

Material - Metal

Material - Plating Mating

Material - Resin

Net Weight

Number of Rows

Orientation

PCB Locator

PCB Retention

PCB Thickness - Recommended

Packaging Type

Pitch - Mating Interface

Pitch - Termination Interface

Plating min - Mating

Plating min - Termination

Polarized to Mating Part

Polarized to PCB

Shrouded

Stackable

No

4

4

Natural

100

No

94V-0

No

No

None

Yes

Brass

Gold over Palladium Nickel

High Temperature Thermoplastic

0.394/g

1

Vertical

No

Yes

1.60mm

Embossed Tape on Reel

1.27mm

1.27mm

0.762µm


0.102µm

Yes

No

No

No

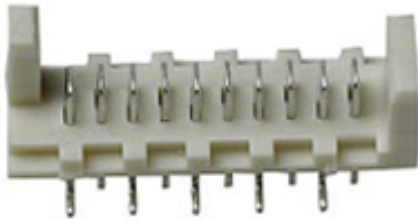

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

China RoHS

Compliant

REACH SVHC

Not Contained Per

-ED/88/2018 (15

January 2019)

Halogen-Free

Status

Not Low-Halogen

For more information, please visit [Contact US](#)

China ROHS

Green Image

ELV

Not Relevant

RoHS Phthalates

Not Contained

Search Parts in this Series

90814 Series

Mates With

90327 IDT Connector

Application Tooling | FAQ

Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.

Global

Description

Product #

Extraction Tool (Plastic) for 4-26 Circuit

690081070

Surface Mount Compatible (SMC)	Yes
Temperature Range - Operating	-40° to +105°C
Termination Interface: Style	Surface Mount

Electrical

Current - Maximum per Contact	2.4A
Voltage - Maximum	250V AC/DC

Material Info

Reference - Drawing Numbers

Product Specification	PS-99020-0011-001
Sales Drawing	SDA-90814-001

This document was generated on 09/25/2019

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Molex:](#)

[90814-3704](#)