

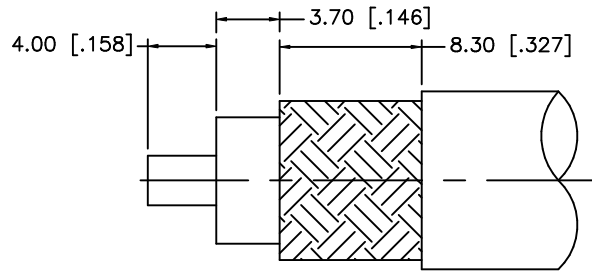
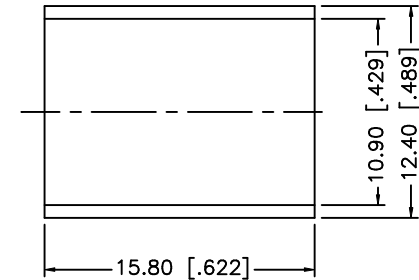


REV.	DATE	DESCRIPTION
NC	01/23/07	INITIAL RELEASE

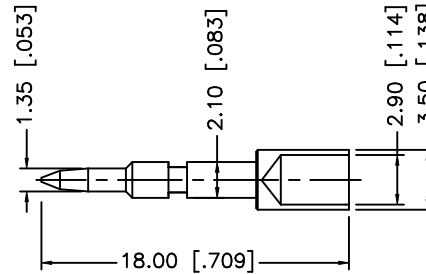

RECOMMENDED  
CABLE STRIPPING DIM'S

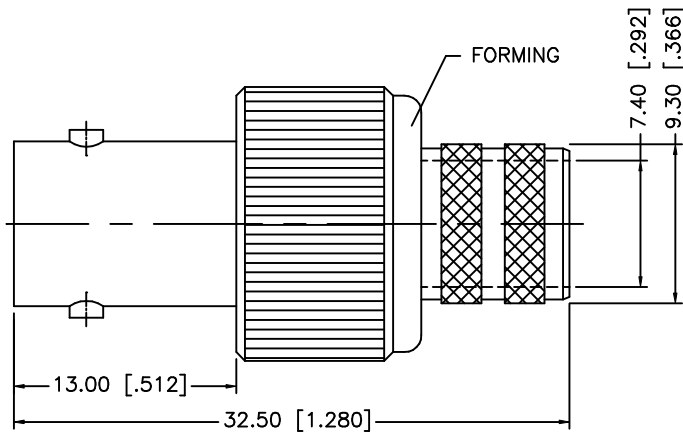

NOTE:

1. CRIMPED FERRULE HEX CRIMP SIZE .429"
2. CRIMPED CONTACT PIN HEX CRIMP SIZE .118"

8				<small>UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [ ] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.</small> <small>UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:</small> 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm <small>UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:</small> .020 - .315 = ± 0.007" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020"	APPROVALS	DATE	<h1 style="color: blue;">Amphenol Connex</h1>	
7					DRAWN	G.R.S.		01/23/07
6					CHECKED			
5					ISSUED			
4	FERRULE	COPPER	NICKEL		1	SHEET		1 OF 1
3	CONTACT PIN	BRASS	GOLD	1	CAD FILE		<b>112603RP</b>	
2	INSULATOR	TEFLON	NATURAL	1	C:/112/112603RP.DWG			
1	BODY	BRASS	NICKEL	1	PART DESCRIPTION		<b>BNC REVERSE POLARITY CRIMP JACK (FOR LMR400, BELDEN 8214, 9913, 9914)</b>	
	DESCRIPTION	MATERIAL	FINISH	QTY	PART NO.			
				DO NOT SCALE DRAWING	DWG. NO.		112603RP.DWG	
					REV.	NC	SIZE	A
							SCALE	NA

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[112603RP](#)