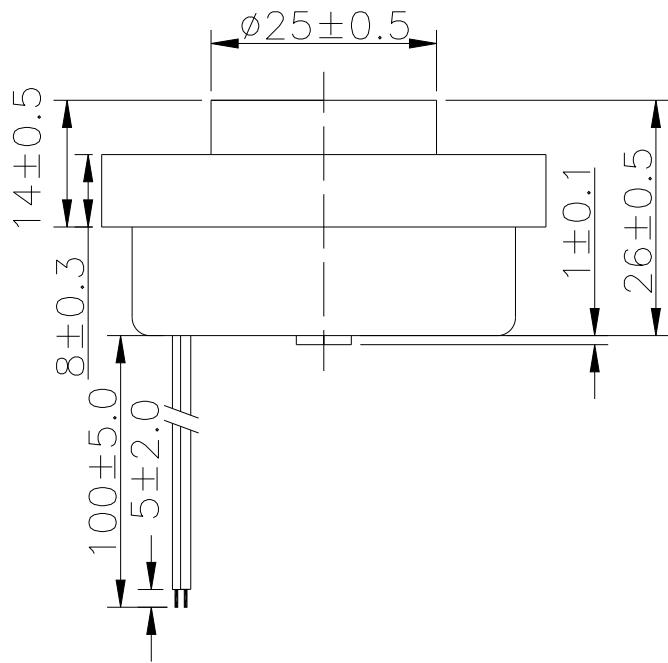
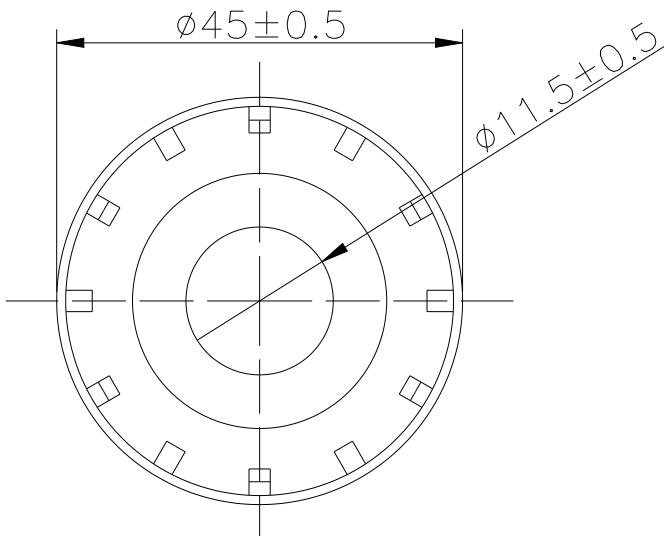


MALLORY**Mallory Sonalert Products Inc.**

Part #

PS-4529W-100AQ**Sales Outline Drawing**Revision **A****OBsolete- CALL 317-612-1000****Specification**

Resonant Frequency (Hz)	2900 \pm 500
Operating Voltage (Vdc)	1.5 ~ 15
Rated Voltage (Vdc)	12
Current Consumption (mA/max)	30 at Rated Voltage
Sound Pressure Level (dB/min)	105 at 30cm at Rated voltage
Tone/Pulse Rate (Hz)	Single
Operating Temperature (°C)	-30 ~ +70
Storage Temperature (°C)	-40 ~ +80
Housing	ABS 707 UL94HB plastic resin (Color: Gray)
Lead Wire	AWG26-UL1007 (Color: Black+White)
Weight (Grams)	21
Condition by wave soldering (°C)	245 \pm 5 / 3 \pm 0.5 sec
Condition by hand soldering (°C)	350 \pm 20 / within 5 sec
Options	For other options contact factory

RoHS Compliant**Dimensions:** (units: mm)

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Mallory Sonalert:](#)

[PS-4529W-100AQ](#)