

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0877600816

Status:


Active

Overview:

Milli-Grid Connector System

Description:

2.00mm Pitch Milli-Grid Header, Right-Angle, Through Hole, 8 Circuits, 0.38µm Gold (Au) Selective Plating, Tray, Lead-Free

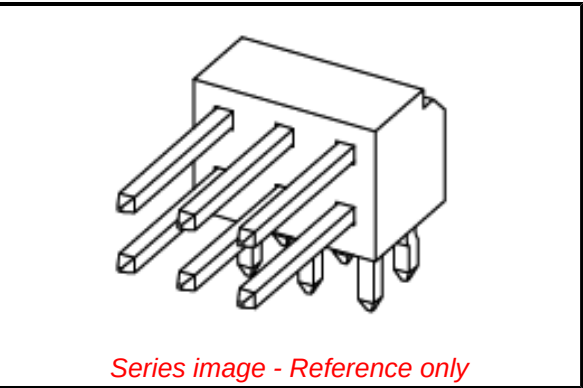

Documents:

3D Model

Drawing (PDF)

Product Specification PS-87761-100-001 (PDF)

Packaging Specification PK-89990-487-001 (PDF)

RoHS Certificate of Compliance (PDF)

Agency Certification	
CSA	LR19980
UL	E29179
General	
Product Family	PCB Headers
Series	87760
Application	Board-to-Board, Signal, Wire-to-Board
Comments	Lead-Free version of 87049 series
Overview	Milli-Grid Connector System
Product Name	Milli-Grid
UPC	822348231690
Physical	
Breakaway	No
Circuits (Loaded)	8
Circuits (maximum)	8
Color - Resin	Black
First Mate / Last Break	No
Flammability	94V-0
Glow-Wire Capable	No
Guide to Mating Part	No
Keying to Mating Part	None
Lock to Mating Part	None
Mated Height	4.00mm
Material - Metal	Phosphor Bronze
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Net Weight	0.327/g
Number of Rows	2
Orientation	Right Angle
PC Tail Length	2.60mm
PCB Locator	No
PCB Retention	None
PCB Thickness - Recommended	1.60mm
Packaging Type	Tray
Pitch - Mating Interface	2.00mm
Pitch - Termination Interface	2.00mm
Plating min - Mating	0.381µm
Plating min - Termination	1.905µm
Polarized to Mating Part	No
Polarized to PCB	No
Shrouded	No
Stackable	Yes
Surface Mount Compatible (SMC)	Yes

EU ELV

Not Relevant

EU RoHS

Compliant

China RoHS

REACH SVHC

Not Contained Per -

ED/61/2018 (27 June

2018)

Halogen-Free

Status

Not Low-Halogen

For more information, please visit

Contact US

China ROHS

Green Image

ELV

Not Relevant

RoHS Phthalates

Not Contained

Search Parts in this Series

87760 Series

Mates With

Milli-Grid Vertical Through Hole Receptacle [79107](#) , [78787](#) , Milli-Grid Flex-to-Board Vertical Receptacle [79108](#) , Milli-Grid Vertical Surface Mount Receptacle [79109](#) , [78788](#) , Milli-Grid Top Entry Surface Mount Receptacle [87381](#)

Temperature Range - Operating	-55° to +105°C
Termination Interface: Style	Through Hole
Electrical	
Current - Maximum per Contact	2.0A
Voltage - Maximum	125V
Solder Process Data	
Duration at Max. Process Temperature (seconds)	014
Lead-freeProcess Capability	WAVE
Max. Cycles at Max. Process Temperature	001
Process Temperature max. C	265
Material Info	
Reference - Drawing Numbers	
Packaging Specification	PK-89990-487-001
Product Specification	PS-87761-100-001
Sales Drawing	SD-87760-109-001

This document was generated on 11/08/2018

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Molex:

87760-0816