

MICRO SWITCH
a Honeywell Division

FED. MFG. CODE 91929

SWITCH — BASIC

CATALOG LISTING

V3L-2905

CQ-X1636

REPLACES X101188-V3L

CATALOG LISTING

V3L-2905
PAGE 1 OF 1

M

ISSUE
1

REPLACES

PR-22425

RELEASE NO.

CHECK



CHECK

CHECK

15 NOV 96

DCS

DDM/CAD
DRAWN

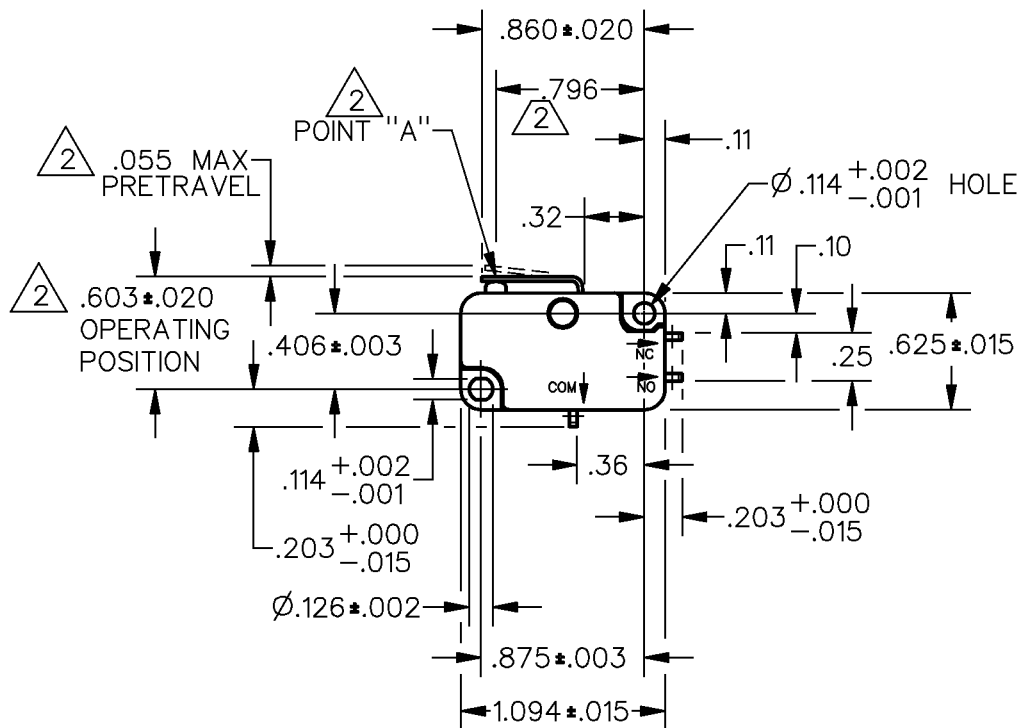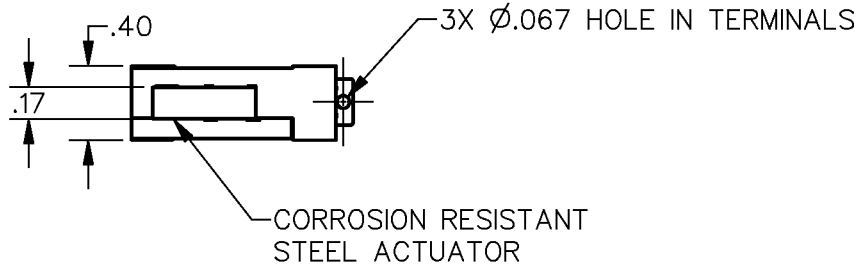

NOTES

1 — TERMINALS ARE SILVER PLATED


2 CHARACTERISTICS MEASURED AT POINT "A"

3 — MAXIMUM MECHANICAL DEAD BREAK OF .0031 CAN BE EXPECTED WITH THIS SWITCH CONSTRUCTION

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS	2
OPERATING FORCE	— — — 271 GRAMS MAX
RELEASE FORCE	— — — 24 GRAMS MIN
DIFFERENTIAL TRAVEL	— — — .012 MAX
OVERTRAVEL	— — — .032 MIN
RELEASE TRAVEL	— — — .007 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

25A, 277 VAC
1HP, 125 VAC
2HP, 250 VAC

SCALE FULL

DO NOT
SCALE PRINT

UNLESS OTHERWISE SPECIFIED
TOLERANCES ARE

ONE PLACE (.0) ±.030

TWO PLACE (.00) ±.015

THREE PLACE (.000) ±.005

ANGLES ±

WEIGHT



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Honeywell:](#)

[V3L-2905](#)