







THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

© COPYRIGHT - BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
FT	0		01	REVISED PER ECO-06-29186	12/13/06	SS	CR

1. ALL DIMENSIONS ARE IN MM.
2. RECOMMENDED PC-BOARD-HOLES DIAMETER:Ø1.20mm to 1.40mm.
3. BUCHANAN LOGO TO APPEAR ON HOUSING LOCATION OPTIONAL WHERE SPACE PERMITS.
- △4 NON CUMULATIVE.

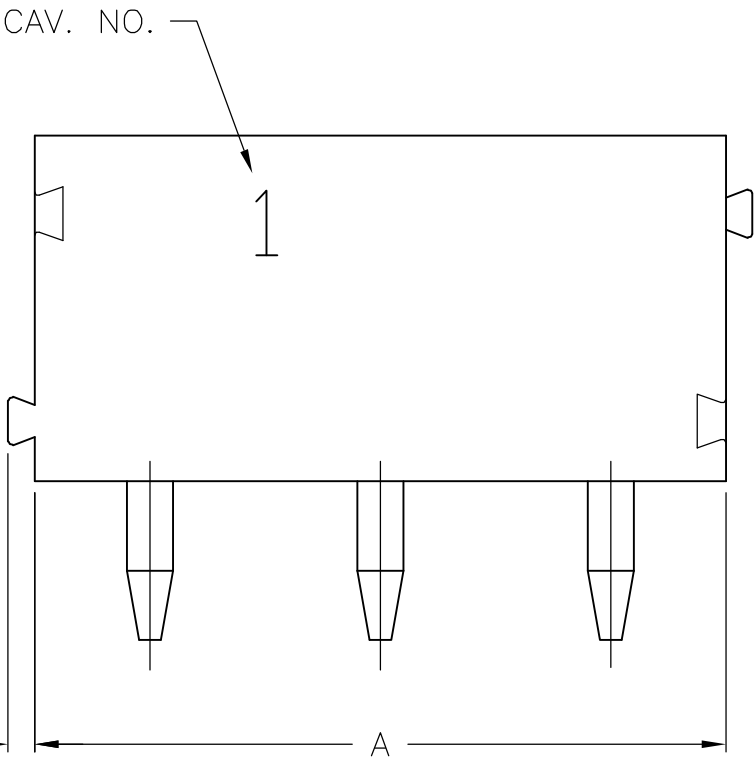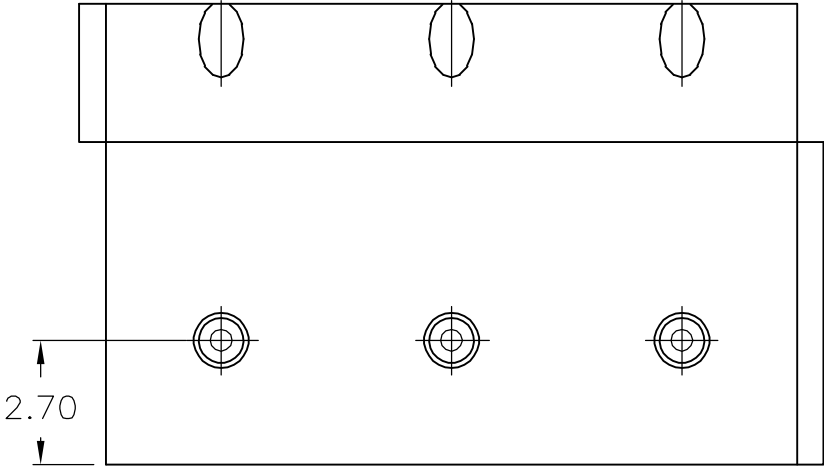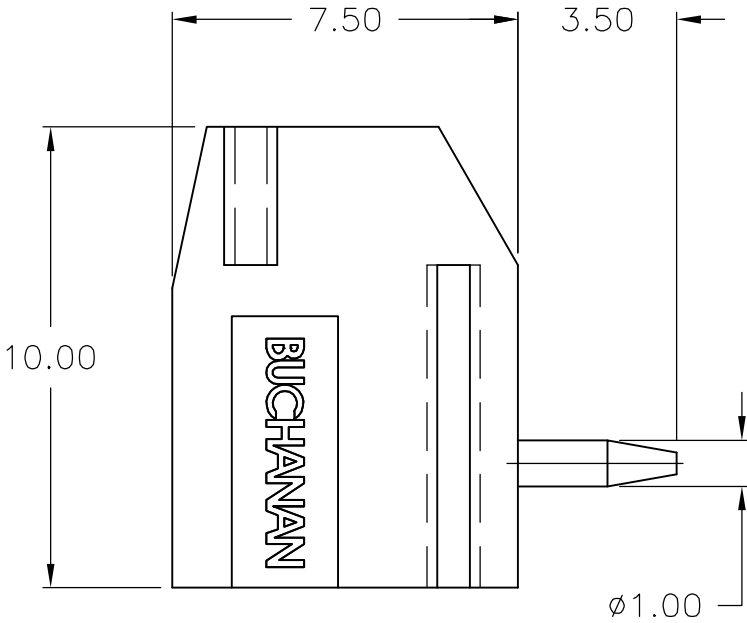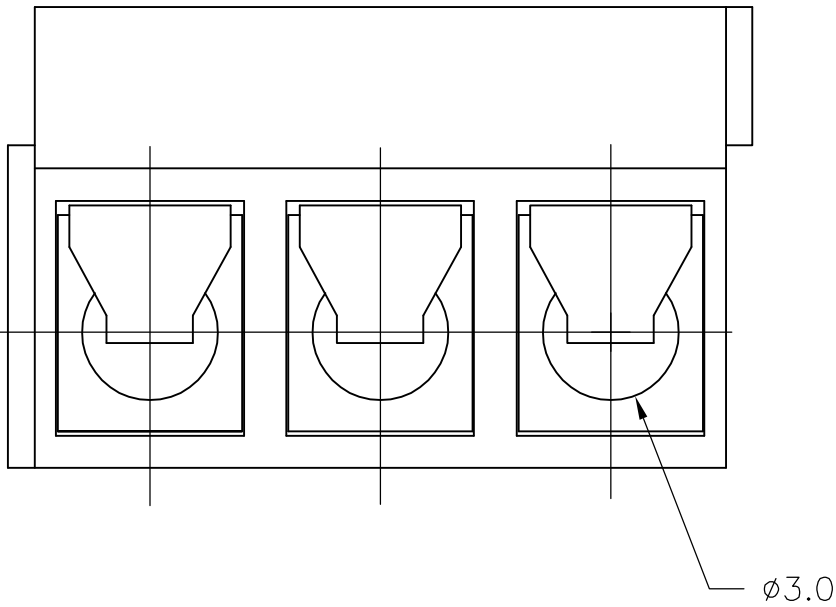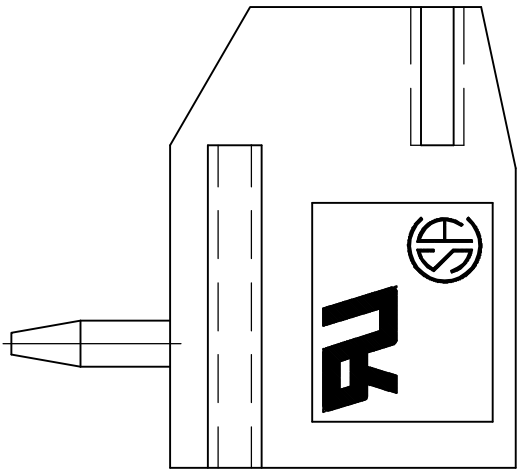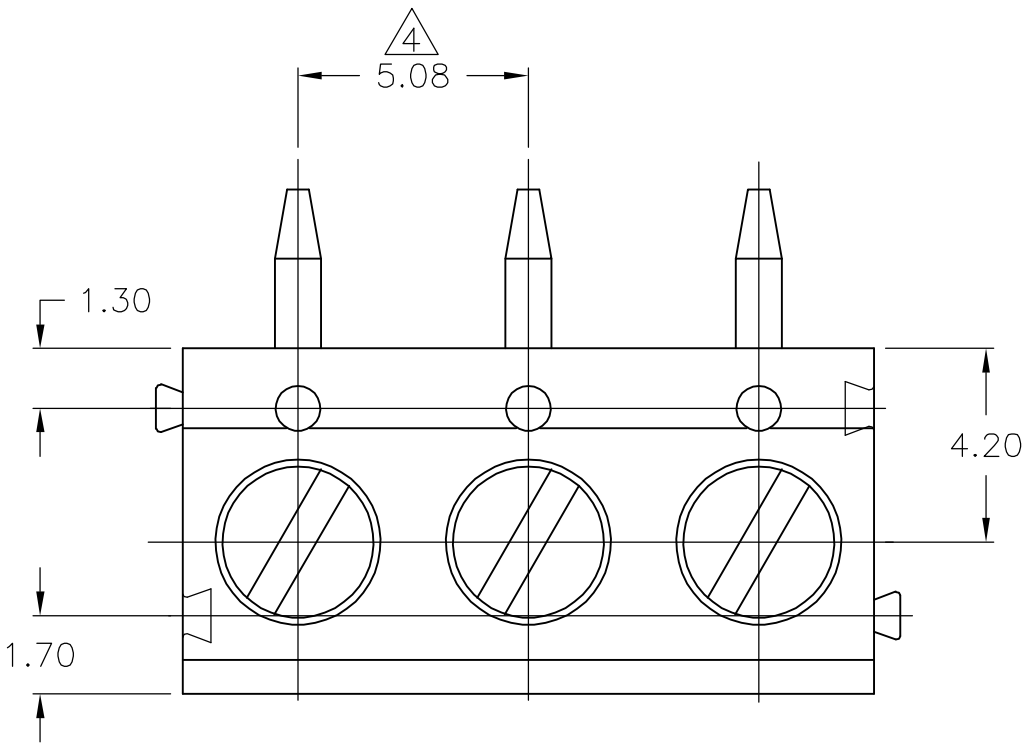

1776257-3 AS SHOWN

121.92	24	2-1776257-4
116.84	23	2-1776257-3
111.76	22	2-1776257-2
106.68	21	2-1776257-1
101.60	20	2-1776257-0
96.52	19	1-1776257-9
91.44	18	1-1776257-8
86.36	17	1-1776257-7
81.28	16	1-1776257-6
76.20	15	1-1776257-5
71.12	14	1-1776257-4
66.04	13	1-1776257-3
60.96	12	1-1776257-2
55.88	11	1-1776257-1
50.80	10	1-1776257-0
45.72	9	1776257-9
40.64	8	1776257-8
35.56	7	1776257-7
30.48	6	1776257-6
25.40	5	1776257-5
20.32	4	1776257-4
15.24	3	1776257-3
10.16	2	1776257-2
DIM A	NO OF POS	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm

MATERIAL
-

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ± -
1 PLC ± 0.3
2 PLC ± 0.25
3 PLC ± -
4 PLC ± -
ANGLES ± -
FINISH -

DWN S SCHLEGEL 5/6/05
CHK C RICHARD 5/6/05
APVD C RICHARD 5/6/05
PRODUCT SPEC
APPLICATION SPEC
WEIGHT -
CUSTOMER DRAWING

tyco Electronics

Tyco Electronics Corporation
Harrisburg, Pa 17105-3608

NAME
TERMINAL BLOCK PCB MOUNT, TOP WIRE ENTRY, LOW PROFILE, W/ INTERLOCK 5.08mm PITCH, HIGH TEMP

SIZE A2
CAGE CODE 00779
SCALE 6:1

DRAWING NO C=1776257
SHEET 1 OF 2
REV 01

RESTRICTED TO -

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

© COPYRIGHT - BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC
FT

DIST
0

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-

1. Application and Features:

1-1. Standard sizes are 2 and 3 way-blocks, but every number of contact can be combined, by simply plugging them together and can be ordered as required**

1-2. With wire guard for wire protection (for that the screw doesn't press directly on the wire)

2. Technical Data:

2-1. Material:

2-1-1. HOUSING: NYLON 6.6 UL 94 V-0 (Blue).

2-1-2. Metal Housing: Brass(Cu Zn)
Cu,Tin plated.

2-1-3. Wire guard: Stainless steel.

2-1-4. Screw: Steel galvanized and chromatized, M2.6

2-2. Electrical:

2-2-1. Current rating: 10 Amps/way max.

2-2-2. Contact resistance: 20mΩ (Max).

2-2-3. Insulation resistance: 5000MΩ /1000V.

2-2-4. Withstanding Voltage: 1500VAC (1min).
test time =60sec/1pcs

2-2-5. Operation Voltage: 300 VAC.

2-2-6. Wire Range: 14-22 AWG.

2-3. Mechanical:

2-3-1. Torque: 4 Kg.cm (Max).

2-3-2. Operating temperature: -55°C to +105°C.

2-3-3. Solderability: 95% coverage (min).

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	±	-
1 PLC	±	0.3
2 PLC	±	0.25
3 PLC	±	-
4 PLC	±	-
ANGLES	±	-

MATERIAL

-

DWN
S SCHLEGEL
CHK
C RICHARD
APVD
C RICHARD

5/6/05
5/6/05
5/6/05

PRODUCT SPEC
APPLICATION SPEC
WEIGHT

-
-
-

tyco
Electronics

Tyco Electronics Corporation
Harrisburg, Pa 17105-3608

NAME
TERMINAL BLOCK PCB MOUNT, TOP WIRE
ENTRY, LOW PROFILE, W/ INTERLOCK
5.08mm PITCH, HIGH TEMP

SIZE
A2

CAGE CODE
00779

DRAWING NO
C=1776257

RESTRICTED TO
-

CUSTOMER DRAWING

SCALE
6:1

SHEET
2

OF
2

REV
01

1776257

AMP 1471-9 REV 31MAR2000

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1776257-6](#)