


U37L Series



- Large Can
- Screw Terminals
- General Purpose U37 Grade
- High Ripple
- 350 to 500VDC Ratings
- RoHS Compliant
- 10,000 Hours Lifetime at +85°C
- Up to 175,000 Hours Useful Life

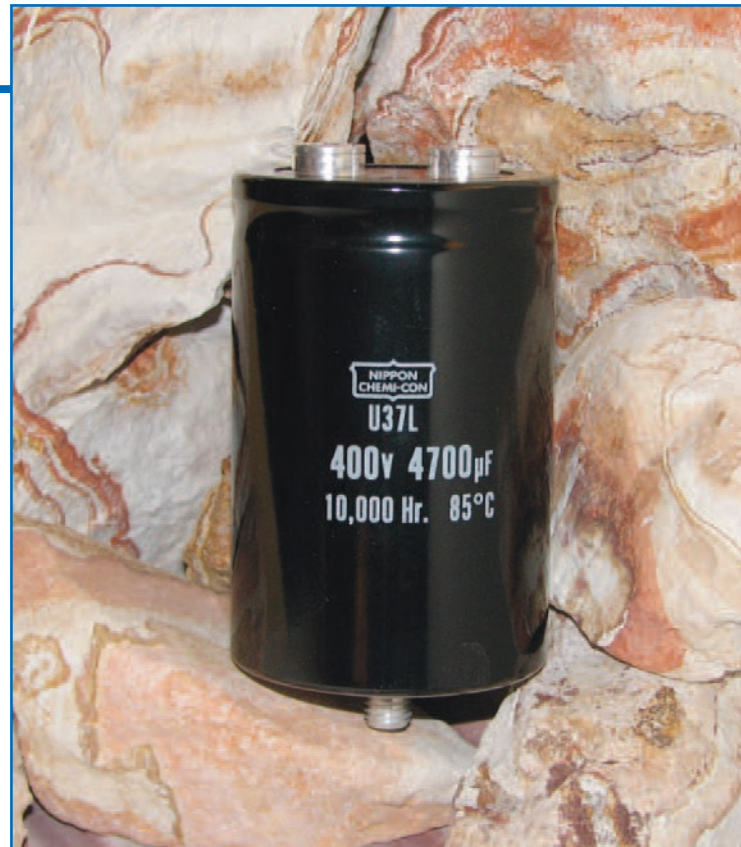

The U37L series is a longer life version of the U37 grade series and is specifically designed to provide the ripple current capability and long life required for high reliability inverter applications. The U37L has an endurance rating of 10,000 hours at +85°C with the rated ripple current applied. The useful life can exceed 175,000 hours at +40°C and 2x the ripple current. These capacitors are available in a variety of high current English or Metric thread terminals. Mounting options include a three-footed clamp or bottom threaded stud. Custom designs are also available.

Summary of Specifications

- Screw terminals: high and low post, English and Metric thread.
- Capacitance range: 1,500 to 18,000µF.
- Voltage range: 350 to 500VDC.
- Category temperature range: -40°C to +85°C.
- Leakage current: 0.02CV(µA) or 5mA, whichever is smaller, after 5 minutes at +25°C.
- Standard capacitance tolerance: ±20%
- Nominal case size (D×L): D = 50mm (2.000") to 89mm (3.500"); L = 92mm (3.625") to 219mm (8.625").
- Rated lifetime: 10,000 hours at +85°C with rated ripple current applied.



U37L Series

U37L Specifications - Screw Terminals

| Item | Characteristics | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|----------------------------------|---|---|-------------------|---|-------|-------------------|-------|--------------------|------|-------------|-------------|-----------|------|--------------|----------|---------|-------|-------------------|----------------------|------|------|----------------------|----|----|-------|-------------------|----------------------|---|---|----------------------|---|---|-------|----|----|----|----|----|----|----|-------|----|----|----|----|----|----|----|
| Category Temperature Range | - 40 to +85°C | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Rated Voltage Range | 350 to 500VDC | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Capacitance Range | 1,500 to 18,000μF at +25°C, 120Hz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Capacitance Tolerance | ±20% (M) at +25°C, 120Hz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Leakage Current | I = 0.02CV (μA) or 5mA, whichever is smaller, after 5 minutes at +25°C. Where I = Max. leakage current (μA), C = Nominal capacitance (μF) and V = Rated voltage (V) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Rated Ripple Current Multipliers | <p>Ambient Temperature (°C)</p> <table border="1"> <tr> <td>+45°C</td> <td>+65°C</td> <td>+85°C</td> </tr> <tr> <td>2.82</td> <td>1.73</td> <td>1.00</td> </tr> </table> <p>Frequency (Hz)</p> <table border="1"> <tr> <td>DC Rated Voltage</td> <td>50Hz</td> <td>120Hz</td> <td>300Hz</td> <td>1kHz</td> <td>3kHz</td> <td>10kHz</td> </tr> <tr> <td>350-500V</td> <td>0.80</td> <td>1.00</td> <td>1.20</td> <td>1.30</td> <td>1.40</td> <td>1.41</td> </tr> </table> <p>To determine maximum ripple current at a specified temperature and frequency, use the appropriate multiplier shown.</p> | +45°C | +65°C | +85°C | 2.82 | 1.73 | 1.00 | DC Rated Voltage | 50Hz | 120Hz | 300Hz | 1kHz | 3kHz | 10kHz | 350-500V | 0.80 | 1.00 | 1.20 | 1.30 | 1.40 | 1.41 | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| +45°C | +65°C | +85°C | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2.82 | 1.73 | 1.00 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| DC Rated Voltage | 50Hz | 120Hz | 300Hz | 1kHz | 3kHz | 10kHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 350-500V | 0.80 | 1.00 | 1.20 | 1.30 | 1.40 | 1.41 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Endurance (Load Life) | <p>The following specifications shall be satisfied when the capacitors are restored to +25°C after subjecting them to DC voltage for 10,000 hours at +85°C with the rated ripple current applied. The sum of the DC voltage and peak AC voltage must not exceed the full rated voltage of the capacitors.</p> <p>Capacitance change: ≤ 20% from initial measurement ESR change : ≤ 200% of initial specified limit Leakage current : ≤ initial specified limit</p> | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Useful Life | <p>With specified standard voltage and ripple current applied, typical life as function of ambient temperature is listed below.</p> <table border="1"> <tr> <td>+85°C</td> <td>13,000 hours max.</td> <td rowspan="3"> Capacitance change: ≤ 30% from initial measurement ESR change : ≤ 300% of initial specified limit Leakage current : ≤ initial specified limit </td> </tr> <tr> <td>+65°C</td> <td>47,700 hours max.</td> </tr> <tr> <td>+45°C</td> <td>175,000 hours max.</td> </tr> </table> | +85°C | 13,000 hours max. | Capacitance change: ≤ 30% from initial measurement ESR change : ≤ 300% of initial specified limit Leakage current : ≤ initial specified limit | +65°C | 47,700 hours max. | +45°C | 175,000 hours max. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| +85°C | 13,000 hours max. | Capacitance change: ≤ 30% from initial measurement ESR change : ≤ 300% of initial specified limit Leakage current : ≤ initial specified limit | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| +65°C | 47,700 hours max. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| +45°C | 175,000 hours max. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Shelf Life | <p>The following specifications shall be satisfied when the capacitors are restored to +25°C after exposing them for 500 hours at +85°C without voltage applied. The rated voltage shall be applied to the capacitors for a minimum of 30 minutes, at least 24 hours and not more than 48 hours before the measurements.</p> <p>Capacitance change: ≤ 20% from initial measurement ESR change : ≤ 200% of initial specified limit Leakage current : ≤ initial specified limit</p> | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Vibration Rating | 10-55Hz, 10g sinusoidal in three axes, 2 hours per axis. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Maximum Tightening Torque | <table border="1"> <tr> <td>Terminal Code</td> <td>HP</td> <td>HL</td> <td>CD</td> <td>CP</td> <td>CH</td> <td>CA</td> <td>CS</td> </tr> <tr> <td>Thread Size</td> <td>10-32 NF-2B</td> <td>M5x0.8-6H</td> <td></td> <td>1/4-28 NF-2B</td> <td></td> <td>M6x1-6H</td> <td></td> </tr> <tr> <td>3 Threads Engaged</td> <td colspan="3">2.0 N·m (18.0 in·lb)</td> <td colspan="4">4.0 N·m (35.0 in·lb)</td> </tr> <tr> <td>6 Threads Engaged</td> <td colspan="3">2.8 N·m (25.0 in·lb)</td> <td colspan="4">6.2 N·m (55.0 in·lb)</td> </tr> </table> | Terminal Code | HP | HL | CD | CP | CH | CA | CS | Thread Size | 10-32 NF-2B | M5x0.8-6H | | 1/4-28 NF-2B | | M6x1-6H | | 3 Threads Engaged | 2.0 N·m (18.0 in·lb) | | | 4.0 N·m (35.0 in·lb) | | | | 6 Threads Engaged | 2.8 N·m (25.0 in·lb) | | | 6.2 N·m (55.0 in·lb) | | | | | | | | | | | | | | | | | | |
| Terminal Code | HP | HL | CD | CP | CH | CA | CS | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Thread Size | 10-32 NF-2B | M5x0.8-6H | | 1/4-28 NF-2B | | M6x1-6H | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 Threads Engaged | 2.0 N·m (18.0 in·lb) | | | 4.0 N·m (35.0 in·lb) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 6 Threads Engaged | 2.8 N·m (25.0 in·lb) | | | 6.2 N·m (55.0 in·lb) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Typical Inductance (nH) at 1MHz | <table border="1"> <tr> <td rowspan="2">Case Diameter (mm)</td> <td colspan="7">Terminal Code</td> </tr> <tr> <td>HP</td> <td>HL</td> <td>CD</td> <td>CP</td> <td>CH</td> <td>CA</td> <td>CS</td> </tr> <tr> <td>∅50.8</td> <td>—</td> <td>—</td> <td>NA</td> <td>NA</td> <td>NA</td> <td>NA</td> <td>NA</td> </tr> <tr> <td>∅63.5</td> <td>—</td> <td>—</td> <td>—</td> <td>—</td> <td>—</td> <td>—</td> <td>—</td> </tr> <tr> <td>∅76.2</td> <td>30</td> <td>30</td> <td>25</td> <td>20</td> <td>25</td> <td>20</td> <td>25</td> </tr> <tr> <td>∅89.0</td> <td>30</td> <td>30</td> <td>25</td> <td>20</td> <td>25</td> <td>20</td> <td>25</td> </tr> </table> | Case Diameter (mm) | Terminal Code | | | | | | | HP | HL | CD | CP | CH | CA | CS | ∅50.8 | — | — | NA | NA | NA | NA | NA | ∅63.5 | — | — | — | — | — | — | — | ∅76.2 | 30 | 30 | 25 | 20 | 25 | 20 | 25 | ∅89.0 | 30 | 30 | 25 | 20 | 25 | 20 | 25 |
| Case Diameter (mm) | Terminal Code | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | HP | HL | CD | CP | CH | CA | CS | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ∅50.8 | — | — | NA | NA | NA | NA | NA | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ∅63.5 | — | — | — | — | — | — | — | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ∅76.2 | 30 | 30 | 25 | 20 | 25 | 20 | 25 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ∅89.0 | 30 | 30 | 25 | 20 | 25 | 20 | 25 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Custom Designs | Custom CV values per case size and termination type may be available upon request. Contact appropriate representative with specific requirements. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

U37L Series

U37L Useful Life

Useful Life: 13,000 Hours at +85°C

The life expectancy of a capacitor is shown as a function of ambient temperature and ripple current load.


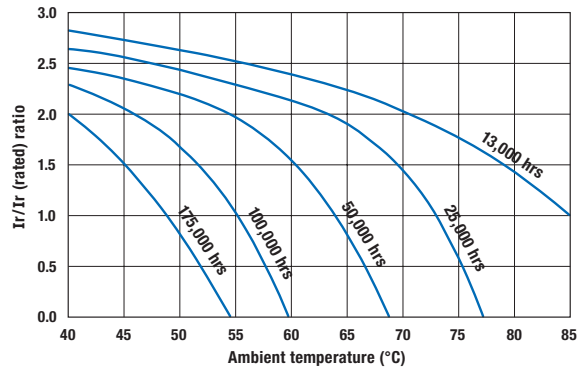


Diagram of Dimensions - Screw Terminals

Large Can/Screw Terminals

Unit: mm (inches)

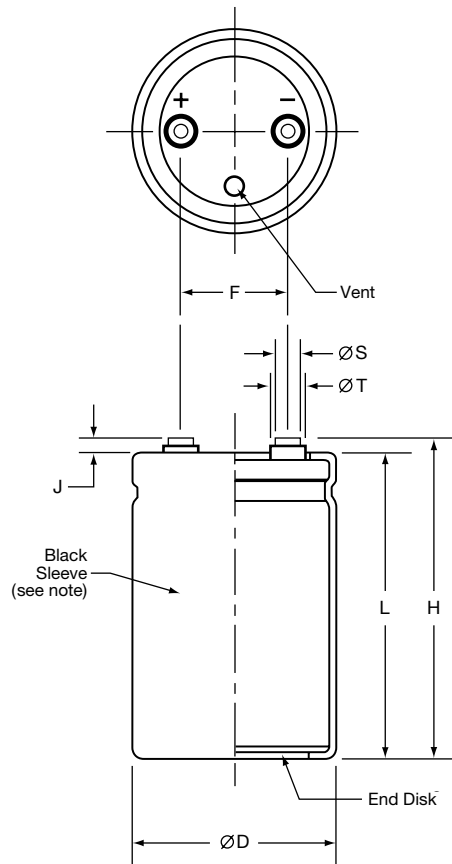

Case Dimensions and Standard Box Quantities

| Case Size Code | ØD +2.0 (0.080) | L ±1.0 (0.040) | F ±0.25 (0.010) | Standard Box Quantity |
|---|--------------------|--|--------------------|-----------------------|
| CB7 CD0 | 50.8 (2.000) | 117 (4.625) 130 (5.125) | 22.2 (0.875) | 49 |
| D92 DA5 DB7 DD0 DE3 | 63.5 (2.500) | 92 (3.625) 105 (4.125) 117 (4.625) 130 (5.125) 143 (5.625) | 28.6 (1.125) | 20 |
| E92 EA5 EB7 EE3 EJ1 EM9 | 76.2 (3.000) | 92 (3.625) 105 (4.125) 117 (4.625) 143 (5.625) 181 (7.125) 219 (8.625) | 31.8 (1.250) | 16 9 |
| F92 FA5 FB7 FE3 FF5 FK0 FM9 | 89.0 (3.500) | 92 (3.625) 105 (4.125) 117 (4.625) 143 (5.625) 155 (6.125) 190 (7.500) 219 (8.625) | 31.8 (1.250) | 5 |

Note:

In some cases, the color of the sleeve may change slightly due to the operating conditions, however, the discoloration will not impair capacitor function.

Terminal Specifications

| Terminal Code | Available Case Diameter | | Thread Size | Minimum Thread Depth | J ±0.5 (0.020) | H ±2.0 (0.080) | ØS ±0.25 (0.010) | ØT ±0.25 (0.010) |
|---------------|-------------------------|-----------------------------|-------------|----------------------|-------------------|-------------------|---------------------|---------------------|
| | ØD Code | ØD mm (inches) | | | | | | |
| HP | C | 50.8 (2.000) | 10-32 NF-2B | 9.5 (0.375) | 6.4 (0.250) | L+J | 8.0 (0.313) | 11.1 (0.438) |
| HL | C | 50.8 (2.000) | M5x0.8-6H | 9.5 (0.375) | 6.4 (0.250) | L+J | 8.0 (0.313) | 11.1 (0.438) |
| CD | D-E | 63.5 - 76.2 (2.500 - 3.000) | M5x0.8-6H | 8.5 (0.335) | 5.0 (0.200) | L+J | 13.0 (0.512) | 18.8 (0.740) |
| CP | D-F | 63.5 - 89.0 (2.500 - 3.500) | ¼-28 NF-2B | 8.7 (0.344) | 2.4 (0.093) | L+J | 17.5 (0.689) | — |
| CH | D-F | 63.5 - 89.0 (2.500 - 3.500) | ¼-28 NF-2B | 11.9 (0.468) | 6.4 (0.250) | L+J | 17.5 (0.689) | — |
| CA | D-F | 63.5 - 89.0 (2.500 - 3.500) | M6x1-6H | 8.7 (0.344) | 2.4 (0.093) | L+J | 17.5 (0.689) | — |
| CS | D-F | 63.5 - 89.0 (2.500 - 3.500) | M6x1-6H | 11.9 (0.468) | 6.4 (0.250) | L+J | 17.5 (0.689) | — |


Mounting Hardware is optional. Refer to hardware specifications on the following page.

U37L Series

Mounting Hardware - Screw Terminals

Type C: Three-Footed Clamp

Unit: mm (inches)

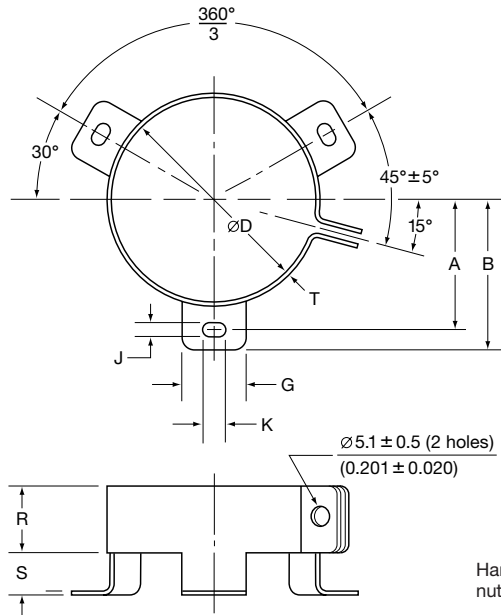


Hardware: Screw, washer and hexagon nut included with each clamp.

Type C: Clamp Dimensions

| Mounting Code | Case ØD | A ±1.0 (0.040) | B ±1.0 (0.040) | G ±1.0 (0.040) | J ±0.5 (0.020) | K ±0.5 (0.020) | R ±1.0 (0.040) | S ±1.0 (0.040) | T ±0.5 (0.020) |
|---------------|--------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|
| C | 50.8 (2.000) | 31.8 (1.250) | 36.5 (1.437) | 13.3 (0.524) | 4.5 (0.177) | 7.1 (0.280) | 19.1 (0.751) | 9.5 (0.374) | 0.8 (0.032) |
| C | 63.5 (2.500) | 38.1 (1.500) | 42.9 (1.689) | 13.3 (0.524) | 4.5 (0.177) | 7.1 (0.280) | 19.1 (0.751) | 9.5 (0.374) | 0.8 (0.032) |
| C | 76.2 (3.000) | 44.5 (1.750) | 49.2 (1.937) | 13.3 (0.524) | 4.5 (0.177) | 7.1 (0.280) | 19.1 (0.751) | 9.5 (0.374) | 1.0 (0.040) |
| C | 89.0 (3.500) | 50.8 (2.000) | 56.5 (2.224) | 16.0 (0.630) | 4.5 (0.177) | 8.0 (0.313) | 21.0 (0.827) | 9.0 (0.354) | 1.0 (0.040) |

Type S: Stud Mounting

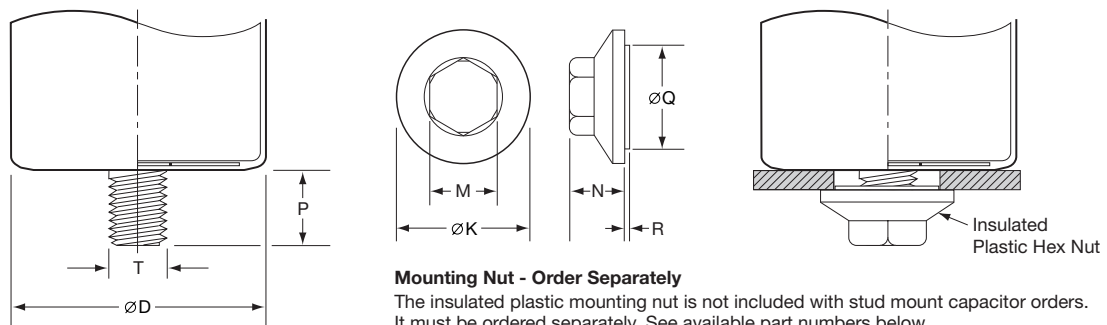

Type S: Stud Dimensions


| Mounting Code | P ±1.0 (0.040) | T Thread Size |
|---------------|----------------|---------------|
| S | 16.0 (0.630) | M12 |

Mounting Nut Dimensions

| Part Number | ØK ±2.0 (0.080) | M ±1.0 (0.040) | N ±1.0 (0.040) | ØQ ±1.0 (0.040) | R ±1.0 (0.040) |
|-------------|-----------------|----------------|----------------|-----------------|----------------|
| 50-8D | 30.0 (1.181) | 19.0 (0.748) | 18.0 (0.709) | 22.0 (0.866) | 1.40 (0.055) |
| 50-8E | 38.0 (1.496) | 19.0 (0.748) | 18.0 (0.709) | 30.0 (1.181) | 1.40 (0.055) |

U37L Series

Part Numbering System for U37L Series When ordering, always specify complete 18-field global part number.

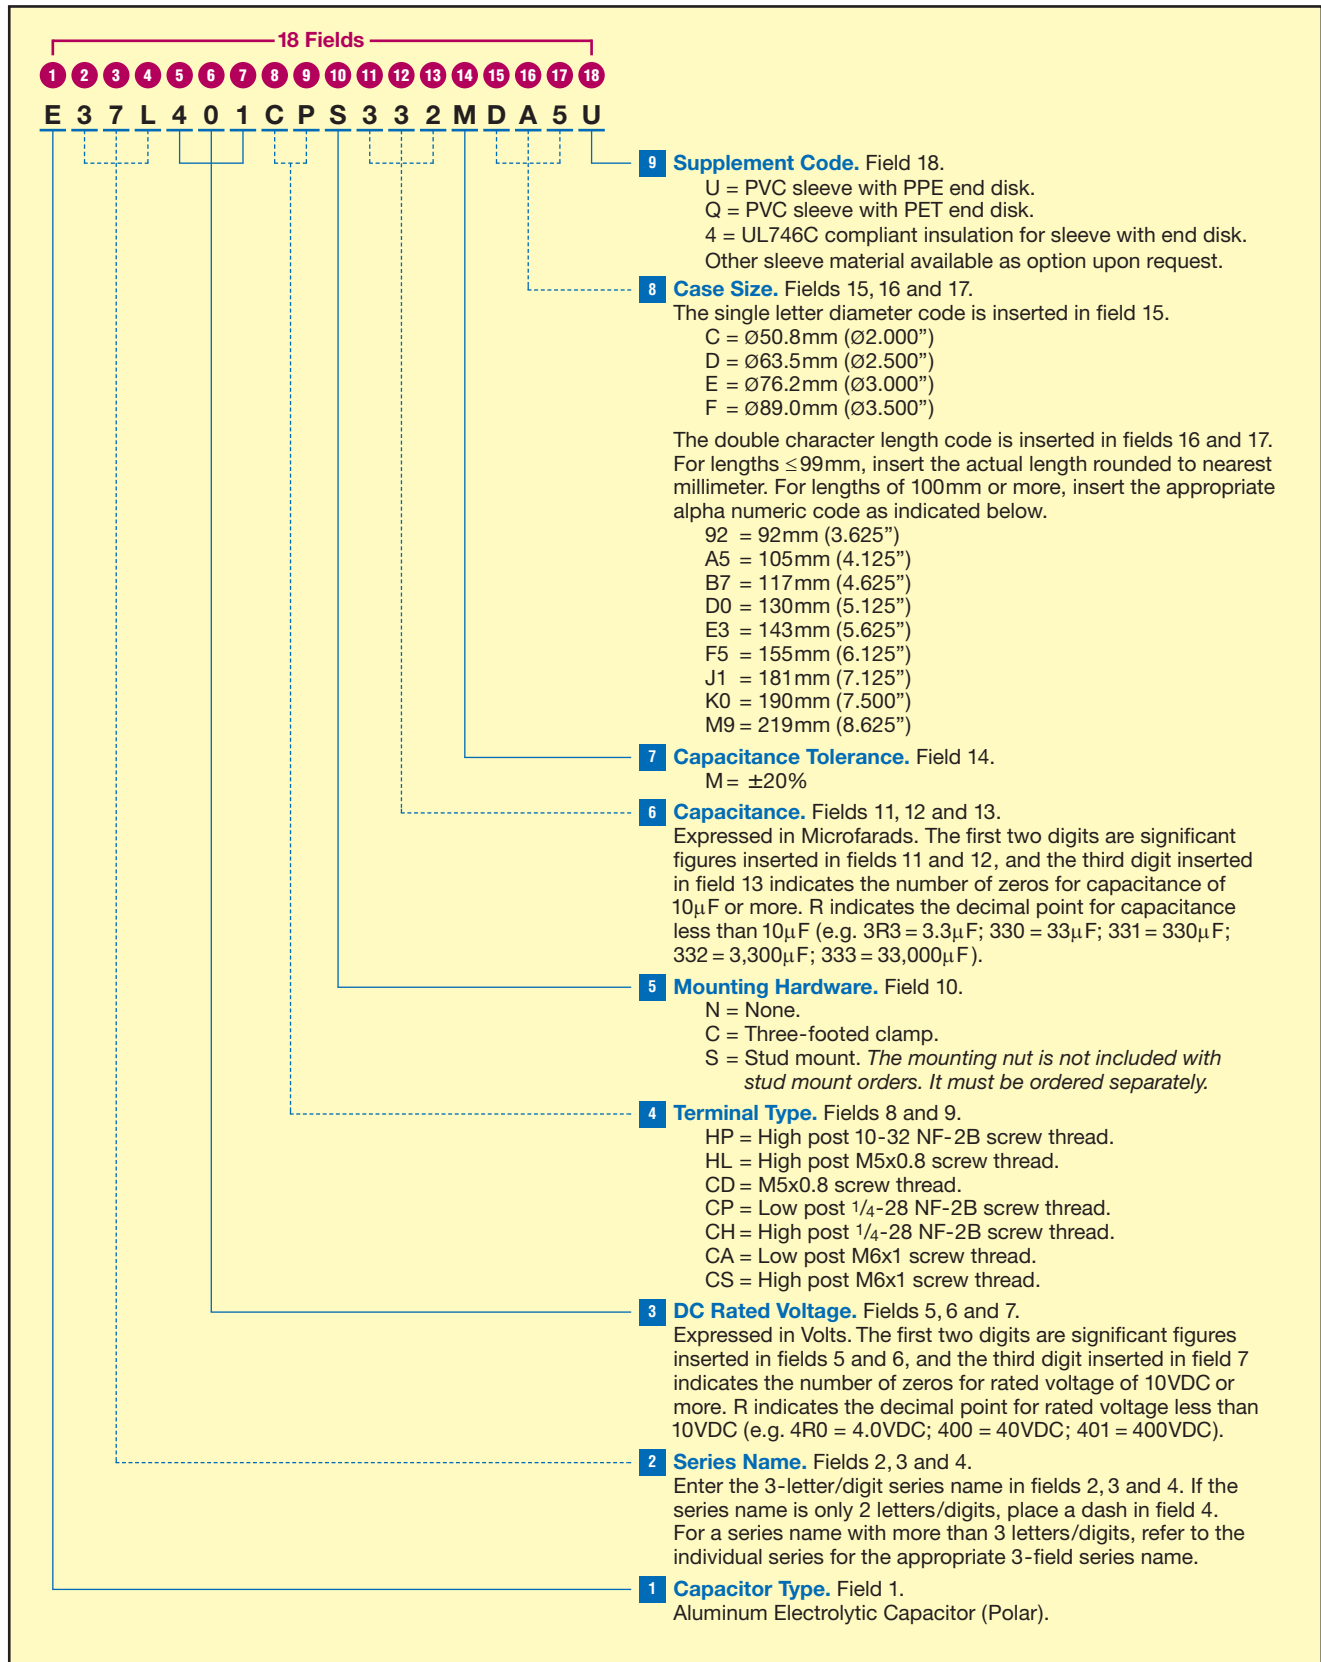



U37L Series

Standard Voltage Ratings - Screw Terminals

| Rated Voltage (WVDC) | Capacitance (μF) | Global Part Number† | Nominal Case Size* D × L (mm) | Case Size Code | Maximum ESR (mΩ) at +25°C, 120Hz | Rated Ripple Current (A rms) at +85°C | | |
|--------------------------------------|--------------------|---------------------|-------------------------------|----------------|----------------------------------|---------------------------------------|-------|-------|
| | | | | | | 120Hz | 300Hz | >3kHz |
| 350 Volts 400 Volts Surge | 3,300 | E37L351HPN332MCB7U | 50 × 117 | CB7 | 29 | 10.6 | 12.7 | 14.8 |
| | 3,300 | E37L351HPN332MCD0U | 50 × 130 | CD0 | 29 | 11.0 | 13.1 | 15.3 |
| | 3,300 | E37L351CPN332MD92U | 63.5 × 92 | D92 | 30 | 10.7 | 12.8 | 15.0 |
| | 3,900 | E37L351CPN392MDA5U | 63.5 × 105 | DA5 | 26 | 12.2 | 14.6 | 17.0 |
| | 3,900 | E37L351CPN392MDB7U | 63.5 × 117 | DB7 | 26 | 12.6 | 15.2 | 17.7 |
| | 4,700 | E37L351CPN472MDD0U | 63.5 × 130 | DD0 | 21 | 14.4 | 17.3 | 20.2 |
| | 5,600 | E37L351CPN562MDE3U | 63.5 × 143 | DE3 | 18 | 16.3 | 19.5 | 22.8 |
| | 4,700 | E37L351CPN472ME92U | 76.2 × 92 | E92 | 22 | 13.9 | 16.7 | 19.5 |
| | 5,600 | E37L351CPN562MEA5U | 76.2 × 105 | EA5 | 18 | 15.8 | 19.0 | 22.1 |
| | 6,800 | E37L351CPN682MEB7U | 76.2 × 117 | EB7 | 15 | 18.1 | 21.7 | 25.4 |
| | 8,200 | E37L351CPN822MEE3U | 76.2 × 143 | EE3 | 13 | 21.3 | 25.6 | 29.9 |
| | 12,000 | E37L351CPN123MEJ1U | 76.2 × 181 | EJ1 | 9 | 28.2 | 33.9 | 39.5 |
| | 15,000 | E37L351CPN153MEM9U | 76.2 × 219 | EM9 | 7 | 34.0 | 40.8 | 47.6 |
| | 6,800 | E37L351CPN682MF92U | 89 × 92 | F92 | 15 | 18.3 | 22.0 | 25.6 |
| | 8,200 | E37L351CPN822MFA5U | 89 × 105 | FA5 | 13 | 21.0 | 25.2 | 29.3 |
| | 8,200 | E37L351CPN822MFB7U | 89 × 117 | FB7 | 13 | 21.8 | 26.1 | 30.5 |
| | 12,000 | E37L351CPN123MFE3U | 89 × 143 | FE3 | 9 | 28.2 | 33.8 | 39.5 |
| | 12,000 | E37L351CPN123MFF5U | 89 × 155 | FF5 | 9 | 29.0 | 34.8 | 40.6 |
| 15,000 | E37L351CPN153MFK0U | 89 × 190 | FK0 | 7 | 35.0 | 42.0 | 49.1 | |
| 18,000 | E37L351CPN183MFM9U | 89 × 219 | FM9 | 6 | 41.1 | 49.4 | 57.6 | |
| 400 Volts 450 Volts Surge | 2,700 | E37L401HPN272MCB7U | 50 × 117 | CB7 | 35 | 9.5 | 11.5 | 13.4 |
| | 3,300 | E37L401HPN332MCD0U | 50 × 130 | CD0 | 29 | 11.0 | 13.1 | 15.3 |
| | 2,700 | E37L401CPN272MD92U | 63.5 × 92 | D92 | 37 | 9.7 | 11.6 | 13.6 |
| | 3,300 | E37L401CPN332MDA5U | 63.5 × 105 | DA5 | 30 | 11.2 | 13.4 | 15.7 |
| | 3,900 | E37L401CPN392MDB7U | 63.5 × 117 | DB7 | 26 | 12.6 | 15.2 | 17.7 |
| | 3,900 | E37L401CPN392MDD0U | 63.5 × 130 | DD0 | 26 | 13.1 | 15.7 | 18.4 |
| | 4,700 | E37L401CPN472MDE3U | 63.5 × 143 | DE3 | 21 | 14.9 | 17.9 | 20.9 |
| | 3,900 | E37L401CPN392ME92U | 76.2 × 92 | E92 | 27 | 12.7 | 15.2 | 17.7 |
| | 4,700 | E37L401CPN472MEA5U | 76.2 × 105 | EA5 | 22 | 14.5 | 17.4 | 20.3 |
| | 5,600 | E37L401CPN562MEB7U | 76.2 × 117 | EB7 | 18 | 16.4 | 19.7 | 23.0 |
| | 6,800 | E37L401CPN682MEE3U | 76.2 × 143 | EE3 | 15 | 19.4 | 23.3 | 27.2 |
| | 10,000 | E37L401CPN103MEJ1U | 76.2 × 181 | EJ1 | 10 | 25.8 | 30.9 | 36.1 |
| | 12,000 | E37L401CPN123MEM9U | 76.2 × 219 | EM9 | 9 | 30.4 | 36.5 | 42.6 |
| | 5,600 | E37L401CPN562MF92U | 89 × 92 | F92 | 18 | 16.6 | 20.0 | 23.3 |
| | 6,800 | E37L401CPN682MFA5U | 89 × 105 | FA5 | 15 | 19.1 | 22.9 | 26.7 |
| | 8,200 | E37L401CPN822MFB7U | 89 × 117 | FB7 | 13 | 21.8 | 26.1 | 30.5 |
| | 10,000 | E37L401CPN103MFE3U | 89 × 143 | FE3 | 10 | 25.7 | 30.9 | 36.0 |
| | 12,000 | E37L401CPN123MFF5U | 89 × 155 | FF5 | 9 | 29.0 | 34.8 | 40.6 |
| 15,000 | E37L401CPN153MFK0U | 89 × 190 | FK0 | 7 | 35.0 | 42.0 | 49.1 | |
| 18,000 | E37L401CPN183MFM9U | 89 × 219 | FM9 | 6 | 40.6 | 48.7 | 56.8 | |
| 420 Volts 470 Volts Surge | 2,700 | E37L421HPN272MCB7U | 50 × 117 | CB7 | 35 | 9.5 | 11.5 | 13.4 |
| | 2,900 | E37L421HPN292MCD0U | 50 × 130 | CD0 | 33 | 10.3 | 12.3 | 14.4 |
| | 2,200 | E37L421CPN222MD92U | 63.5 × 92 | D92 | 45 | 8.7 | 10.5 | 12.2 |
| | 2,700 | E37L421CPN272MDA5U | 63.5 × 105 | DA5 | 37 | 10.1 | 12.1 | 14.2 |
| | 3,300 | E37L421CPN332MDB7U | 63.5 × 117 | DB7 | 30 | 11.6 | 14.0 | 16.3 |
| | 3,900 | E37L421CPN392MDD0U | 63.5 × 130 | DD0 | 26 | 13.1 | 15.7 | 18.4 |
| | 4,700 | E37L421CPN472MDE3U | 63.5 × 143 | DE3 | 21 | 14.9 | 17.9 | 20.9 |
| | 3,900 | E37L421CPN392ME92U | 76.2 × 92 | E92 | 27 | 12.7 | 15.2 | 17.7 |
| | 4,700 | E37L421CPN472MEA5U | 76.2 × 105 | EA5 | 22 | 14.5 | 17.4 | 20.3 |
| | 5,600 | E37L421CPN562MEB7U | 76.2 × 117 | EB7 | 18 | 16.4 | 19.7 | 23.0 |
| | 6,800 | E37L421CPN682MEE3U | 76.2 × 143 | EE3 | 15 | 19.4 | 23.3 | 27.2 |
| | 8,200 | E37L421CPN822MEJ1U | 76.2 × 181 | EJ1 | 13 | 23.3 | 28.0 | 32.7 |
| | 12,000 | E37L421CPN123MEM9U | 76.2 × 219 | EM9 | 9 | 30.4 | 36.5 | 42.6 |
| | 5,600 | E37L421CPN562MF92U | 89 × 92 | F92 | 18 | 16.6 | 20.0 | 23.3 |
| | 6,800 | E37L421CPN682MFA5U | 89 × 105 | FA5 | 15 | 19.1 | 22.9 | 26.7 |

† For terminal, mounting and construction options, refer to the part numbering system for descriptions and codes.

* Refer to diagram of dimensions for detailed case size specifications.



U37L Series

Standard Voltage Ratings - Screw Terminals

| Rated Voltage (WVDC) | Capacitance (µF) | Global Part Number† | Nominal Case Size* D × L (mm) | Case Size Code | Maximum ESR (mΩ) at +25°C, 120Hz | Rated Ripple Current (A rms) at +85°C | | |
|-------------------------------------|------------------|---------------------|-------------------------------|----------------|----------------------------------|---------------------------------------|-------|-------|
| | | | | | | 120Hz | 300Hz | >3kHz |
| 420 Volts 470 Volts Surge | 6,800 | E37L421CPN682MFB7U | 89 × 117 | FB7 | 15 | 19.8 | 23.8 | 27.8 |
| | 10,000 | E37L421CPN103MFE3U | 89 × 143 | FE3 | 10 | 25.7 | 30.9 | 36.0 |
| | 10,000 | E37L421CPN103MFF5U | 89 × 155 | FF5 | 10 | 26.5 | 31.8 | 37.1 |
| | 12,000 | E37L421CPN123MFK0U | 89 × 190 | FK0 | 9 | 31.3 | 37.6 | 43.9 |
| | 15,000 | E37L421CPN153MFM9U | 89 × 219 | FM9 | 7 | 37.0 | 44.5 | 51.9 |
| 450 Volts 500 Volts Surge | 2,200 | E37L451HPN222MCB7U | 50 × 117 | CB7 | 43 | 8.6 | 10.3 | 12.1 |
| | 2,200 | E37L451HPN222MCD0U | 50 × 130 | CD0 | 43 | 8.9 | 10.7 | 12.5 |
| | 2,200 | E37L451CPN222MD92U | 63.5 × 92 | D92 | 45 | 8.7 | 10.5 | 12.2 |
| | 2,200 | E37L451CPN222MDA5U | 63.5 × 105 | DA5 | 45 | 9.1 | 11.0 | 12.8 |
| | 2,700 | E37L451CPN272MDB7U | 63.5 × 117 | DB7 | 37 | 10.5 | 12.6 | 14.7 |
| | 3,300 | E37L451CPN332MDD0U | 63.5 × 130 | DD0 | 30 | 12.1 | 14.5 | 16.9 |
| | 3,900 | E37L451CPN392MDE3U | 63.5 × 143 | DE3 | 26 | 13.6 | 16.3 | 19.0 |
| | 3,300 | E37L451CPN332ME92U | 76.2 × 92 | E92 | 31 | 11.6 | 14.0 | 16.3 |
| | 3,900 | E37L451CPN392MEA5U | 76.2 × 105 | EA5 | 27 | 13.2 | 15.8 | 18.5 |
| | 4,700 | E37L451CPN472MEB7U | 76.2 × 117 | EB7 | 22 | 15.1 | 18.1 | 21.1 |
| | 5,600 | E37L451CPN562MEE3U | 76.2 × 143 | EE3 | 18 | 17.6 | 21.2 | 24.7 |
| | 6,800 | E37L451CPN682MEJ1U | 76.2 × 181 | EJ1 | 15 | 21.2 | 25.5 | 29.7 |
| | 10,000 | E37L451CPN103MEM9U | 76.2 × 219 | EM9 | 10 | 27.8 | 33.3 | 38.9 |
| | 4,700 | E37L451CPN472MF92U | 89 × 92 | F92 | 22 | 15.2 | 18.3 | 21.3 |
| | 5,600 | E37L451CPN562MFA5U | 89 × 105 | FA5 | 18 | 17.3 | 20.8 | 24.2 |
| | 5,600 | E37L451CPN562MFB7U | 89 × 117 | FB7 | 18 | 18.0 | 21.6 | 25.2 |
| | 8,200 | E37L451CPN822MFE3U | 89 × 143 | FE3 | 13 | 23.3 | 28.0 | 32.6 |
| | 8,200 | E37L451CPN822MFF5U | 89 × 155 | FF5 | 13 | 24.0 | 28.8 | 33.6 |
| | 12,000 | E37L451CPN123MFK0U | 89 × 190 | FK0 | 9 | 31.3 | 37.6 | 43.9 |
| | 12,000 | E37L451CPN123MFM9U | 89 × 219 | FM9 | 9 | 33.1 | 39.8 | 46.4 |
| 500 Volts 550 Volts Surge | 1,500 | E37L501HPN152MCB7U | 50 × 117 | CB7 | 64 | 7.1 | 8.5 | 10.0 |
| | 1,500 | E37L501HPN152MCD0U | 50 × 130 | CD0 | 64 | 7.4 | 8.9 | 10.3 |
| | 1,800 | E37L501CPN182MD92U | 63.5 × 92 | D92 | 55 | 7.9 | 9.5 | 11.1 |
| | 2,200 | E37L501CPN222MDA5U | 63.5 × 105 | DA5 | 45 | 9.1 | 11.0 | 12.8 |
| | 2,200 | E37L501CPN222MDB7U | 63.5 × 117 | DB7 | 45 | 9.5 | 11.4 | 13.3 |
| | 2,700 | E37L501CPN272MDD0U | 63.5 × 130 | DD0 | 37 | 10.9 | 13.1 | 15.3 |
| | 2,700 | E37L501CPN272MDE3U | 63.5 × 143 | DE3 | 37 | 11.3 | 13.6 | 15.8 |
| | 2,700 | E37L501CPN272ME92U | 76.2 × 92 | E92 | 38 | 10.5 | 12.6 | 14.7 |
| | 3,300 | E37L501CPN332MEA5U | 76.2 × 105 | EA5 | 31 | 12.1 | 14.6 | 17.0 |
| | 3,300 | E37L501CPN332MEB7U | 76.2 × 117 | EB7 | 31 | 12.6 | 15.2 | 17.7 |
| | 4,700 | E37L501CPN472MEE3U | 76.2 × 143 | EE3 | 22 | 16.2 | 19.4 | 22.6 |
| | 5,600 | E37L501CPN562MEJ1U | 76.2 × 181 | EJ1 | 18 | 19.3 | 23.1 | 27.0 |
| | 8,200 | E37L501CPN822MEM9U | 76.2 × 219 | EM9 | 13 | 25.2 | 30.2 | 35.2 |
| | 3,900 | E37L501CPN392MF92U | 89 × 92 | F92 | 27 | 13.9 | 16.6 | 19.4 |
| | 3,900 | E37L501CPN392MFA5U | 89 × 105 | FA5 | 27 | 14.5 | 17.3 | 20.2 |
| | 4,700 | E37L501CPN472MFB7U | 89 × 117 | FB7 | 22 | 16.5 | 19.8 | 23.1 |
| | 6,800 | E37L501CPN682MFE3U | 89 × 143 | FE3 | 15 | 21.2 | 25.5 | 29.7 |
| | 6,800 | E37L501CPN682MFF5U | 89 × 155 | FF5 | 15 | 21.9 | 26.2 | 30.6 |
| | 8,200 | E37L501CPN822MFK0U | 89 × 190 | FK0 | 12 | 26.7 | 32.0 | 37.4 |
| | 10,000 | E37L501CPN103MFM9U | 89 × 219 | FM9 | 9 | 33.1 | 39.8 | 46.4 |

† For terminal, mounting and construction options, refer to the part numbering system for descriptions and codes.

* Refer to diagram of dimensions for detailed case size specifications.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[United Chemi-Con \(UCC\):](#)

[E37L351CPN682MEB7M](#) [E37L421CPN272MDA5M](#) [E37L351CPN123MEJ1M](#) [E37L501CPN392MF92M](#)
[E37L451CPN822MFF5M](#) [E37L451HPN222MCB7M](#) [E37L451HPN222MCD0M](#) [E37L501CPN103MFM9M](#)
[E37L501CPN182MD92M](#) [E37L501CPN222MDA5M](#) [E37L501CPN222MDB7M](#) [E37L501CPN272MDD0M](#)
[E37L501CPN272MDE3M](#) [E37L501CPN272ME92M](#) [E37L501CPN332MEA5M](#) [E37L501CPN392MFA5M](#)
[E37L451CPN562MFB7M](#) [E37L501CPN472MEE3M](#) [E37L501CPN472MFB7M](#) [E37L501CPN562MEJ1M](#)
[E37L501CPN682MFE3M](#) [E37L501CPN682MFF5M](#) [E37L501CPN822MEM9M](#) [E37L501CPN822MFK0M](#)
[E37L501HPN152MCB7M](#) [E37L501HPN152MCD0M](#) [E37L501CPN332MEB7M](#) [E37L451CPN123MFM9M](#)
[E37L421CPN472MDE3M](#) [E37L421CPN472MEA5M](#) [E37L421CPN562MEB7M](#) [E37L421CPN562MF92M](#)
[E37L421CPN682MEE3M](#) [E37L421CPN682MFA5M](#) [E37L421CPN682MFB7M](#) [E37L421CPN822MEJ1M](#)
[E37L421HPN272MCB7M](#) [E37L421HPN292MCD0M](#) [E37L451CPN822MFE3M](#) [E37L451CPN123MFK0M](#)
[E37L451CPN682MEJ1M](#) [E37L451CPN222MDA5M](#) [E37L451CPN222MD92M](#) [E37L451CPN272MDB7M](#)
[E37L451CPN332MDD0M](#) [E37L451CPN332ME92M](#) [E37L451CPN392MDE3M](#) [E37L451CPN392MEA5M](#)
[E37L451CPN472MEB7M](#) [E37L451CPN472MF92M](#) [E37L451CPN562MEE3M](#) [E37L451CPN562MFA5M](#)
[E37L451CPN103MEM9M](#) [E37L351CPN822MEE3M](#) [E37L351CPN822MFA5M](#) [E37L351CPN822MFB7M](#)
[E37L351HPN332MCB7M](#) [E37L351HPN332MCD0M](#) [E37L401CPN103MEJ1M](#) [E37L401CPN103MFE3M](#)
[E37L401CPN123MEM9M](#) [E37L401CPN123MFF5M](#) [E37L401CPN153MFK0M](#) [E37L401CPN183MFM9M](#)
[E37L401CPN272MD92M](#) [E37L401CPN332MDA5M](#) [E37L351CPN562MEA5M](#) [E37L351CPN682MF92M](#)
[E37L401CPN392MDB7M](#) [E37L351CPN123MFE3M](#) [E37L351CPN123MFF5M](#) [E37L351CPN153MEM9M](#)
[E37L351CPN153MFK0M](#) [E37L351CPN183MFM9M](#) [E37L351CPN332MD92M](#) [E37L351CPN392MDA5M](#)
[E37L351CPN392MDB7M](#) [E37L351CPN472MDD0M](#) [E37L351CPN472ME92M](#) [E37L351CPN562MDE3M](#)
[E37L421CPN332MDB7M](#) [E37L421CPN392MDD0M](#) [E37L421CPN392ME92M](#) [E37L421CPN123MEM9M](#)
[E37L421CPN103MFE3M](#) [E37L421CPN153MFM9M](#) [E37L421CPN222MD92M](#) [E37L401HPN332MCD0M](#)
[E37L421CPN103MFF5M](#) [E37L401CPN392MDD0M](#) [E37L401CPN682MFA5M](#) [E37L401CPN682MEE3M](#)
[E37L401CPN562MF92M](#) [E37L401CPN562MEB7M](#) [E37L401CPN472MEA5M](#) [E37L401CPN472MDE3M](#)
[E37L401CPN392ME92M](#) [E37L401HPN272MCB7M](#) [E37L401CPN822MFB7M](#) [E37L421CPN123MFK0M](#)