



© 2016 AFci



Amphenol
FCi

B

A


C

D

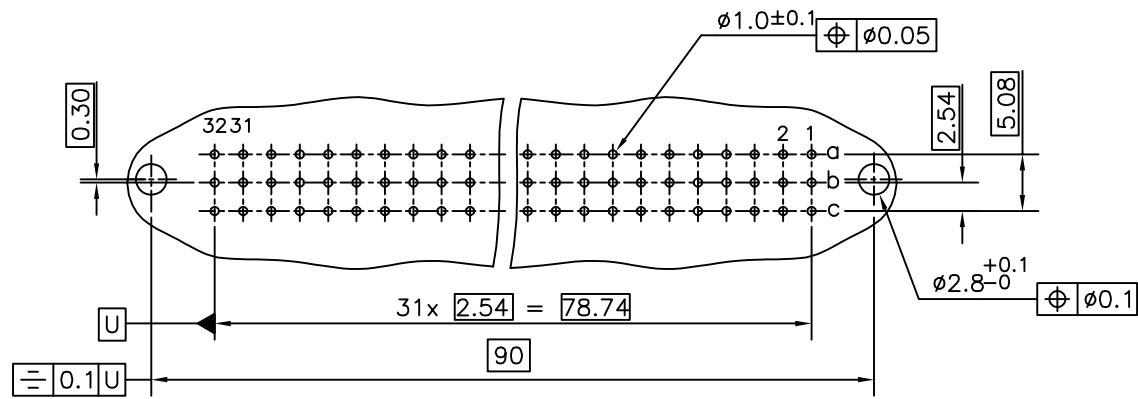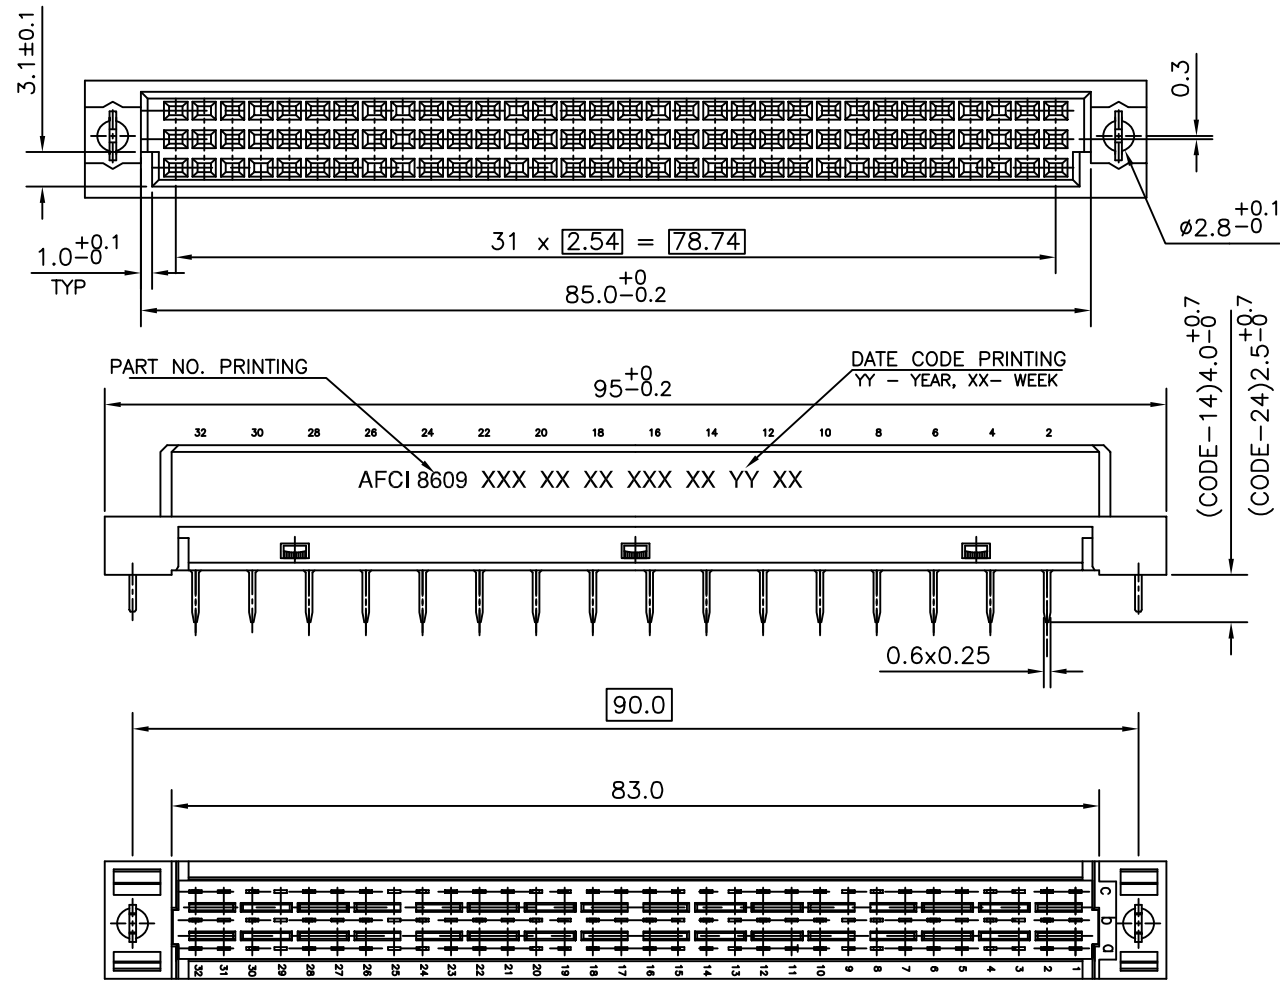

P.C.B DRILLING DETAILS

- NOTES:
1. THE "LF" PRODUCTS MEET EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-47-0004.
 2. LEAD FREE OR RoHS DIRECTIVE LABELING TO BE PROVIDED AS PER GS-14-920 FOR LEAD FREE VERSION.
 3. FOR GENERAL CHARACTERISTICS AND RoHS INFORMATION, REFER DRAWING C-8609-0000A.

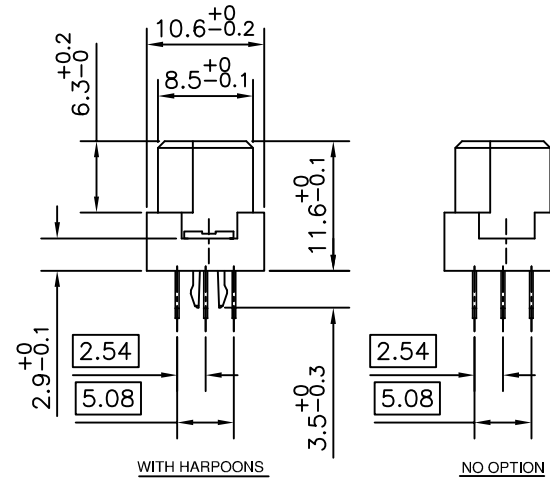

TECHNICAL SPECIFICATION

INSULATOR MATERIAL : POLYESTER THERMOPLASTIC UL94V-0, GREY

HOUSING CAN WITHSTAND EXPOSURE TO LEAD FREE WAVE SOLDERING TEMPERATURE OF 260-265°C FOR STRAIGHT CONNECTORS AS IT IS IN CLASSICAL LEAD WAVE SOLDERING AT 235-250°C

CONTACT / HARPOON MATERIAL : COPPER ALLOY

CONTACT PLATING

ACTIVE ZONE : Au / GXT™ OVER NICKEL

TERMINATION ZONE

LEAD FREE VERSION : TIN (PURE MATTE) OVER NICKEL

HARPOON PLATING

LEAD FREE VERSION : TIN (PURE MATTE) OVER NICKEL

ELECTRICAL DATA

CURRENT RATING AT 20°C : 1.5 A

CURRENT (I MAX) : 2 A

TEMPERATURE RANGE : -55°C/+125°C

CONTACT RESISTANCE : ≤ 20mΩ

INSULATION RESISTANCE : ≥ 10⁶ MΩ

TEST VOLTAGE (rms) : 1000V

MECHANICAL DATA

INSERTION FORCE PER CONTACT : ≤ 0.94N

EXTRACTION FORCE PER CONTACT : ≥ 0.15N

REFERENCE SPECIFICATIONS : DIN 41612 / IEC 603-2

SERIES	8609	3	48	8	1	14	7	5	8	V1LF
ROWS FITTED WITH CONTACTS										
Rows a-b-c	3 48									
Rows a-c	4 32									
NUMBER OF CONTACTS										
TYPE OF INSULATOR										
3 ROW FEMALE INSULATOR	8									
METHOD OF MOUNTING										
STANDARD MOUNTING - STYLE C	1									
TERMINATION										
STRAIGHT SPILL (LONG)	14									
STRAIGHT SPILL (SHORT)	24									
OPTIONS										
NO OPTION	7									
WITH HARPOONS	H									
PERFORMANCE CLASS										
4 - DIN 41612 CLASS 3	4									
5 - DIN 41612 CLASS 2	5									
6 - DIN 41612 CLASS 1	6									
8 - AS PER MIL C 55302/JSS 50808	8									
PITCH PER ROW										
5.08	8									
SPECIAL CODE										
V1LF	LEAD FREE VERSION									

mat'l. code		surface		tolerance		projection		product family	
-		ISO 1302 ✓		ISO 406 ISO 1101				8609	
ltr		ecn no		dr		date		title	
A		I04-0100		MINI		09/11/2004		DIN STANDARD RECEPTACLE	
B		I05-0042		MINI		19/05/2005		STRAIGHT SPILL DIN 41612 STYLE-C	
C		I06-0063		MINI		01/06/2006		scale -	
D		ELX-I-30201		AMAL		16/05/2018		dwg no	
				dr		MINI K VANDANATH 29/09/2004		sheet 1 of 1	
				engr		RAKHEE GEORGE 29/09/2004		size	
				chr		M JACOB 16/05/2018		A3	
				appd		BIJU K PAUL 16/05/2018		type	
								Product Customer Drawing	
sheet index		revision		D					
		sheet		1					

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[FCI / Amphenol:](#)

[86094328114758V1LF](#) [86094328114768V1LF](#) [86093488114748V1LF](#) [86093488114758V1LF](#)
[86093488114768V1LF](#) [86093488124758V1LF](#) [86093488124H58V1LF](#) [86094328114748V1LF](#) [86094328114788V1LF](#)
[86094328124758V1LF](#) [86094328124768V1LF](#) [86094328124H58V1LF](#)