



LOC		DIST		REVISIONS		
F	LTR	DESCRIPTION		DATE	DWN	APVD
C		REVISED	PER	ECO-15-011840	17NOV15	RS CT

D

C

B

A

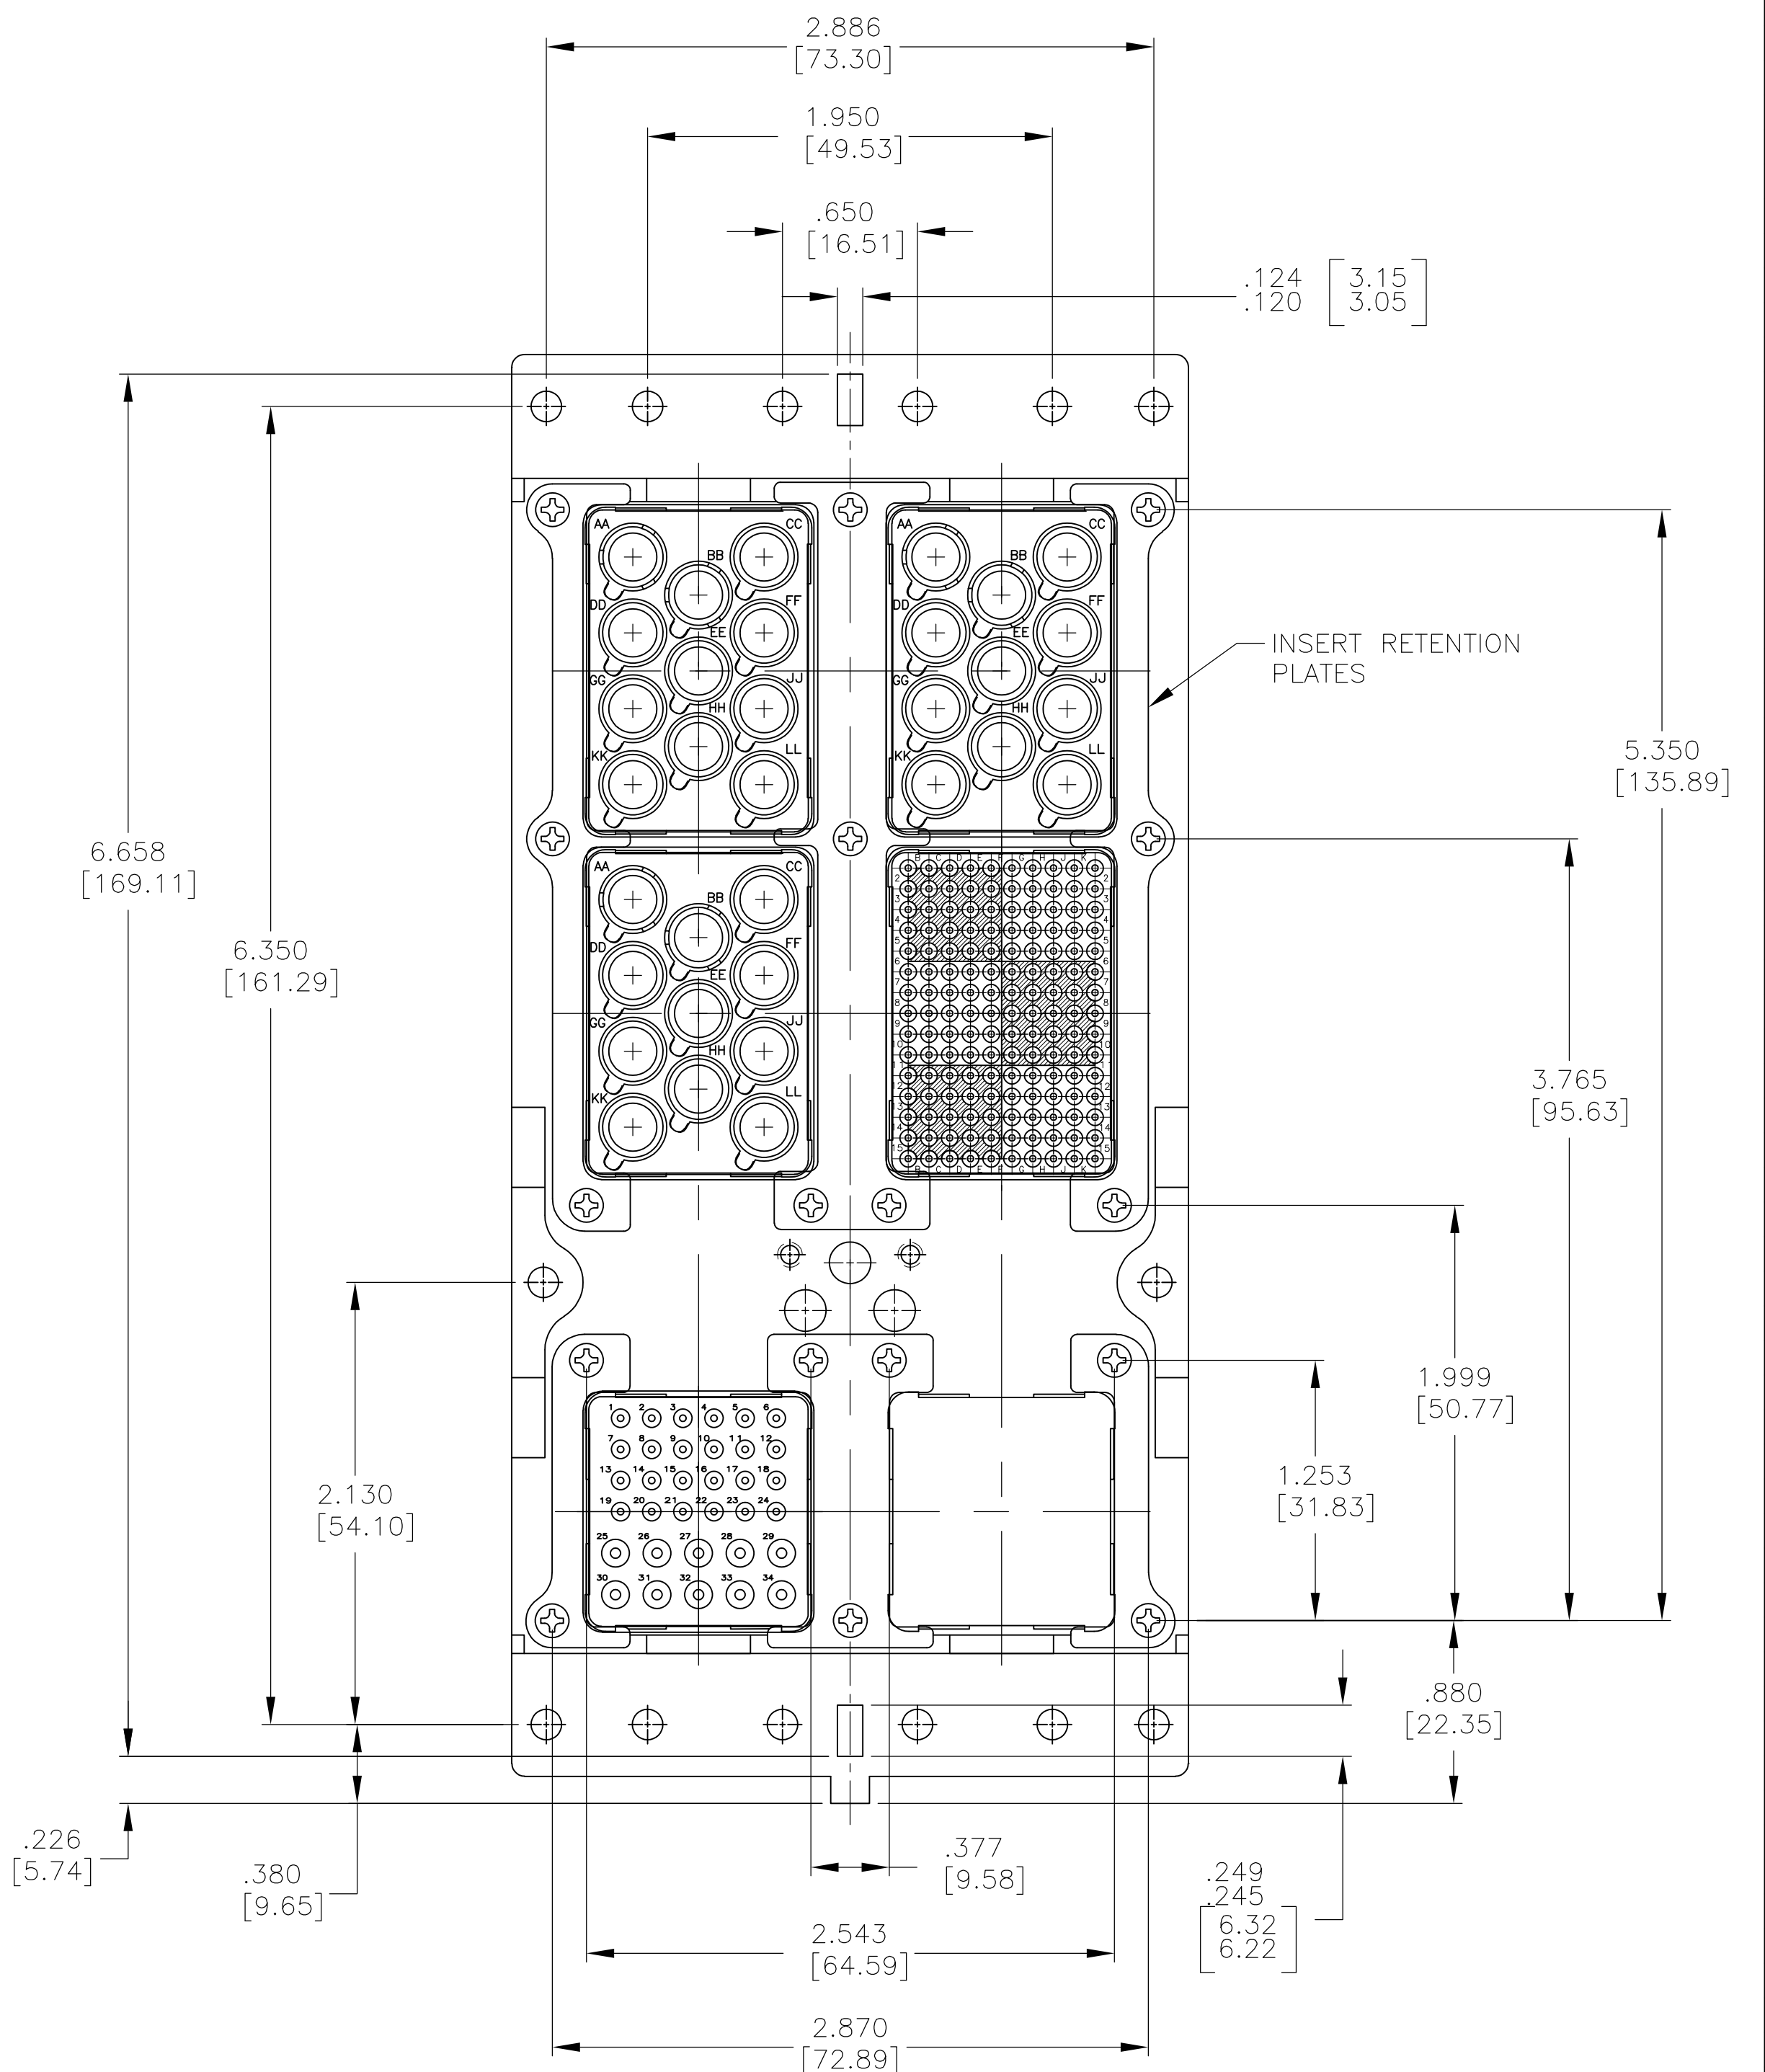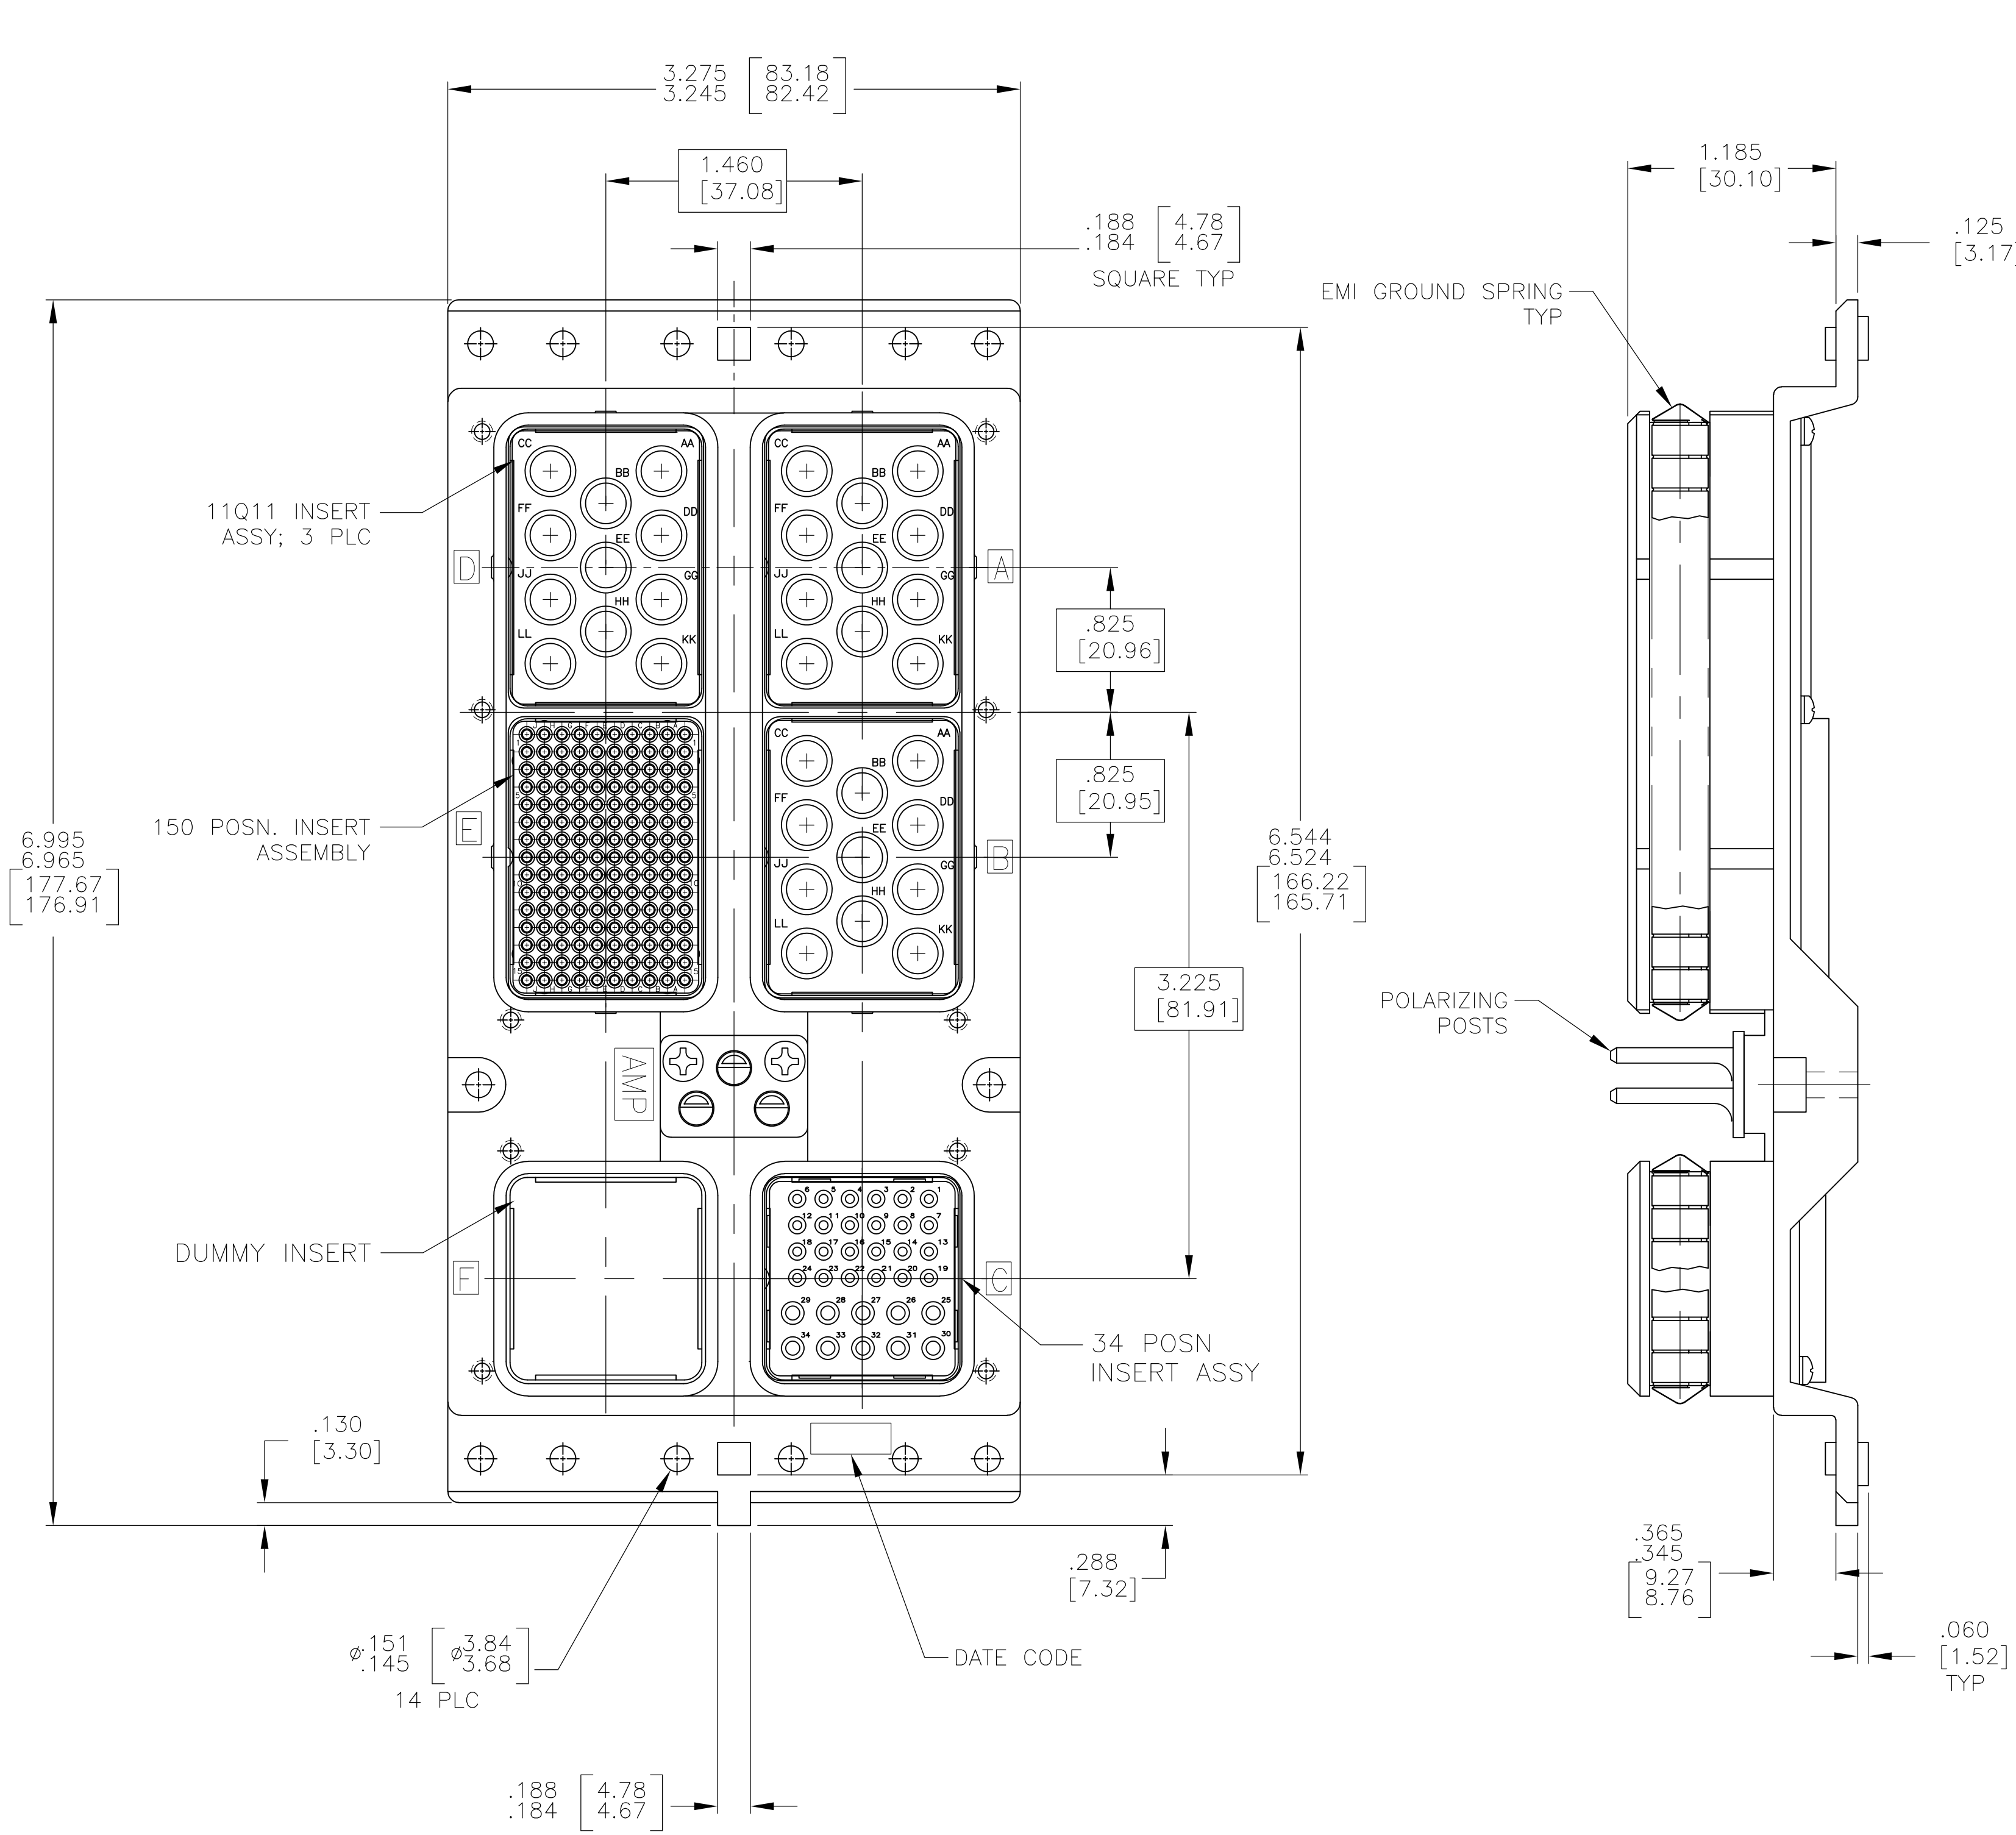

COMPONENT	MATERIAL	FINISH
SHELL	DIE CAST ALUMINUM PER ASTM-B-85	ELECTROLESS NICKEL PER MIL-C-26074,
RETENTION PLATES	ALUMINUM ALLOY PER ASTM-B-209	ELECTROLESS NICKEL PER MIL-C-26074,
SCREWS AND LOCKWASHERS	STEEL OR STAINLESS STEEL	CHROMATE OVER ZINC OR PASSIVATED
POLARIZING POSTS	ZINC ALLOY PER ASTM-B-86	ELECTROLESS NICKEL PER MIL-C-26074,
POLARIZING POST RETAINING PLATE	ALUMINUM ALLOY PER ASTM-B-209	BLUE ANODIZED PER MIL-A-8625
150 & 34 INSERTS	THERMOSET	—
11Q11 & DUMMY INSERTS	ALUMINUM ALLOY PER ASTM-B-209	ELECTROLESS NICKEL PER MIL-C-26074,

- CONNECTOR DIMENSIONS ARE PER ARINC 600 SPECIFICATION
- DUST COVER (NOT SHOWN) INSTALLED FOR SHIPPING. (2 PLC)
- KEYING SHOWN IN POSITION "01" FOR REFERENCE ONLY.
SEE TABLE FOR KEYING POSITION.
FOR POSITION "00" KEYING SHIPPED UNASSEMBLED.
- THE FOLLOWING CONTACTS ARE INCLUDED BUT NOT INSTALLED:
SIZE 22 CRIMP PIN CONTACT; TE PART NO. 208262-3; QTY = 150
SIZE 20 CRIMP SOCKET CONTACT; TE PART NO. 208267-2; QTY = 24
SIZE 16 CRIMP SOCKET CONTACT; TE PART NO. 208270-2; QTY = 10
QUADRAX SOCKET CONTACT; TE PART NO. 1445693-1; QTY = 33

OBSOLETE	"01"	2157337-1
	KEYING POSITION	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
INCHES

MATERIAL
SEE TABLE

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

0 PLC ± -
1 PLC ± -
2 PLC ± -
3 PLC ± .005 [0.13]
4 PLC ± -
ANGLES ± - ± -

FINISH
SEE TABLE

DWN
C.C.THOMAS
6-9-11

CHK
W.BERMHART
6-9-11

APVD
W.BERMHART
6-9-11

NAME

APPLICATION SPEC

WEIGHT

SIZE
A1

CAGE CODE
00779

DRAWING NO
2157337

RESTRICTED TO

—

TE Connectivity

PLUG ASSY, SIZE 3, ARINC 600
(11Q11/11Q11/34/11Q11/150/DUMMY)

—

CUSTOMER DRAWING

SCALE
3:2

SHEET
1 OF 1

REV
C

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[2157337-1](#)