
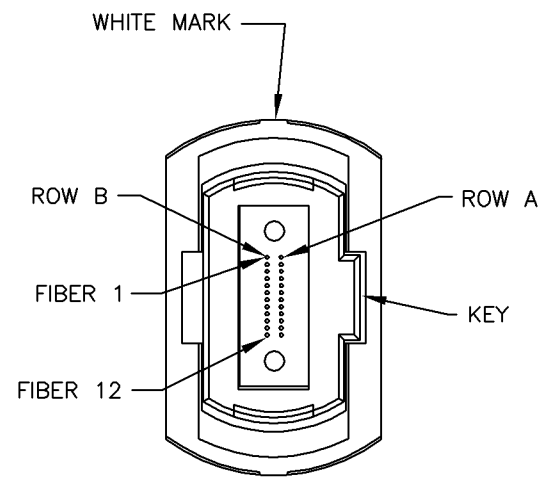


LDC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN
HG	-					APVD
		A2		ECR-11-017572	24AUG2011	SBY RZ


1 MAXIMUM CONNECTOR INSERTION LOSS AT 850nm.

2. PRODUCT AND PROCESSING MUST MEET REQUIREMENTS OF TEC-138-702.

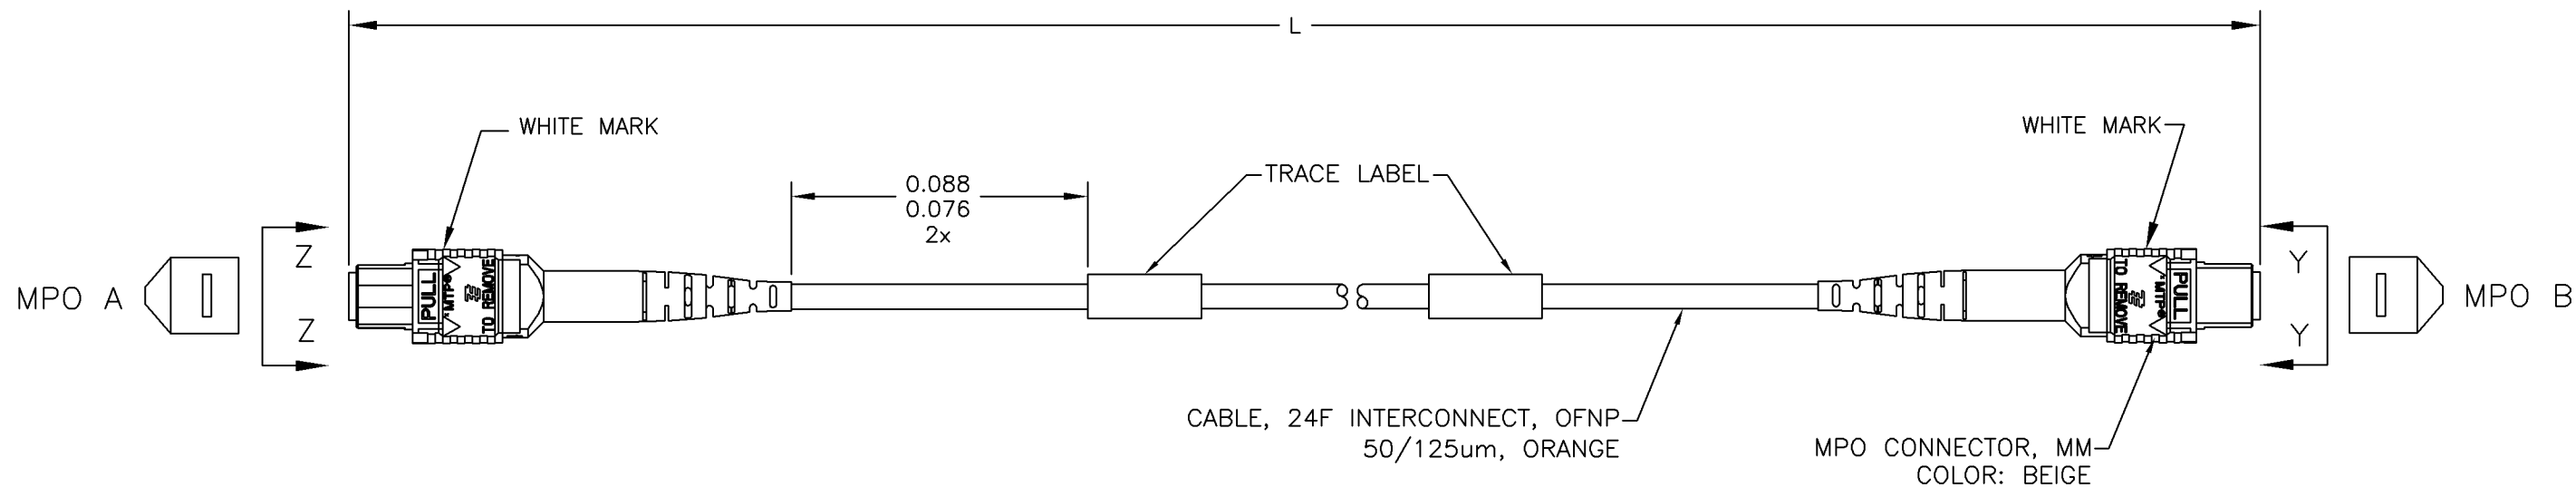

VIEW Z-Z
NOT TO SCALE

MPO A ROW	FIBER	FIBER COLOR	MPO B ROW	FIBER
A	1	BLUE	B	1
A	2	ORANGE	B	2
A	3	GREEN	B	3
A	4	BROWN	B	4
A	5	SLATE	B	5
A	6	WHITE	B	6
A	7	RED	B	7
A	8	BLACK	B	8
A	9	YELLOW	B	9
A	10	VIOLET	B	10
A	11	ROSE	B	11
A	12	AQUA	B	12
B	1	BLUE	A	1
B	2	ORANGE	A	2
B	3	GREEN	A	3
B	4	BROWN	A	4
B	5	SLATE	A	5
B	6	WHITE	A	6
B	7	RED	A	7
B	8	BLACK	A	8
B	9	YELLOW	A	9
B	10	VIOLET	A	10
B	11	ROSE	A	11
B	12	AQUA	A	12

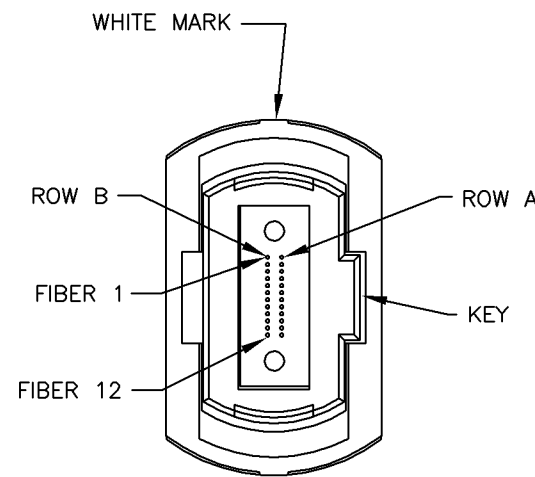

VIEW Y-Y
NOT TO SCALE

CONNECTOR FIBER PATH

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN DAVIS WANG 05JAN2011	TE Connectivity		
DIMENSIONS: METERS		CHK JAMES ZHOU 05JAN2011			
		APVD RICHARD ZHAO 05JAN2011	NAME CABLE ASSEMBLY, FIBER OPTIC, CXP, 50/125um 24 FIBER, INTERCONNECT CABLE MPO, NO PINS, BOTH ENDS		
		PRODUCT SPEC	SIZE A2		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPLICATION SPEC	CAGE CODE 00779		
MATERIAL		WEIGHT	DRAWING NO C=2148039		
FINISH		CUSTOMER DRAWING	RESTRICTED TO		
			SCALE NTS		
			SHEET 1 OF 2		
			REV A2		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[2-2148039-0](#)