


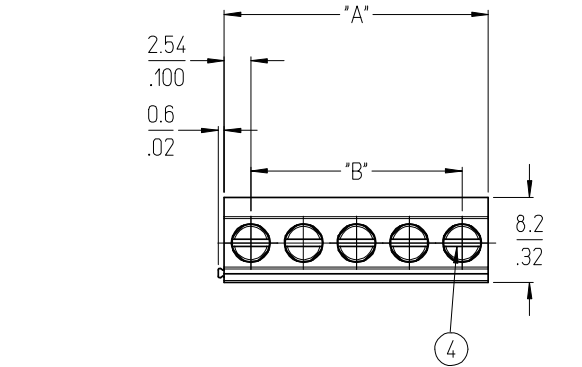
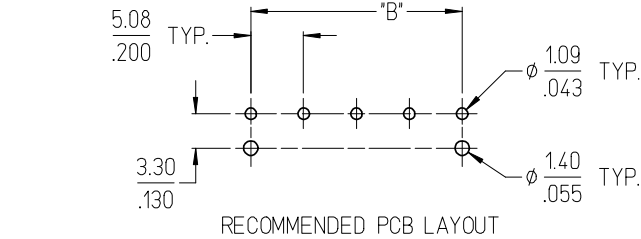


NO. OF CIRC. "XX"	DIM. "A"		DIM. "B"		MATERIAL NUMBER
	mm	in	mm	in	
02	10.2	.40	5.08	.200	398890042
03	15.2	.60	10.16	.400	
04	20.3	.80	15.24	.600	
05	25.4	1.00	20.32	.800	398890043
06	30.5	1.20	25.40	1.000	398890044

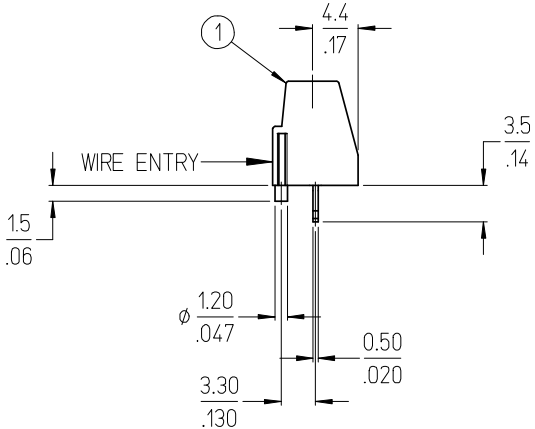

AUX. VIEW
(5 CIRCUIT SHOWN)

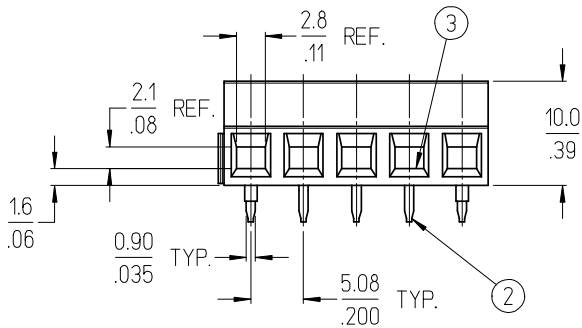

NOTES:

1. MATERIAL: SEE TABLE
2. FINISHES: SEE TABLE
3. *XX* REFERS TO QUANTITY OF CIRCUITS.
4. WIRE RANGE: 30 - 14 AWG
5. RATED VOLTAGE: 300V
6. RATED CURRENT: 17.5 A
7. RECOMMENDED TIGHTENING TORQUE: 0.5 N-m (4.4 lbf-in)
MAXIMUM TIGHTENING TORQUE: 0.6 N-m (5.3 lbf-in)
8. WIRE STRIP LENGTH: 6 mm (.24 in).
9. OPERATING TEMPERATURE: -40°C TO 105°C.
10. POLARIZING PEGS ARE ONLY ON END CIRCUITS.
11. ASSEMBLY IS ROHS COMPLIANT.

4	XX	SCREW, M3	COPPER ALLOY	NICKEL PLATED
3	XX	CLAMP, RISING	COPPER ALLOY	NICKEL PLATED
2	XX	TERMINAL	COPPER ALLOY	TIN PLATED
1	1	HOUSING, UL94 V-0	PA66	BLACK
ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH

INITIAL RELEASE EC NO: ETC2008-0119 DRWN: CLYORK 2008/03/28 CHKD: JMACNEIL 2008/04/10 APPR: JMACNEIL 2008/04/18	DESCRIPTION REV	A

QUALITY SYMBOLS
▽=0
▽=0

GENERAL TOLERANCES (UNLESS SPECIFIED)		
	mm	INCH
4 PLACES ± ---	± ---	± ---
3 PLACES ± ---	± .005	± .005
2 PLACES ± 0.13	± .01	± .01
1 PLACE ± 0.25	± ---	± ---
ANGULAR ± 2 °		
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		

DIMENSION STYLE	
MM/IN	
DRAWN BY	DATE
C. YORK	2007/11/30
CHECKED BY	DATE
J. MACNEIL	2007/11/30
APPROVED BY	DATE
J. MACNEIL	2007/11/30
MATERIAL NO.	
SEE CHART	
SIZE	B

SCALE 2:1	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION
TITLE		
5.08MM [.200] FIXED, EUROSTYLE, W/POLARIZING PEGS		
 MOLEX INCORPORATED		
DOCUMENT NO. SD-39889-003	SHEET NO. 1 OF 1	
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Molex:](#)

[39889-0042](#)