


AS02808MR-R 28mm Speaker

3541 Stop Eight Road • Dayton, Ohio 45414

Product Overview


- 28mm diameter speaker with Neodymium magnet for 80 dB sensitivity
- 1W continuous, 1.5W maximum power handling and 8Ω impedance
- Mylar cone with pleated surround for moisture resistance
- 5.2mm (less than 1/4") thick for space-limited applications

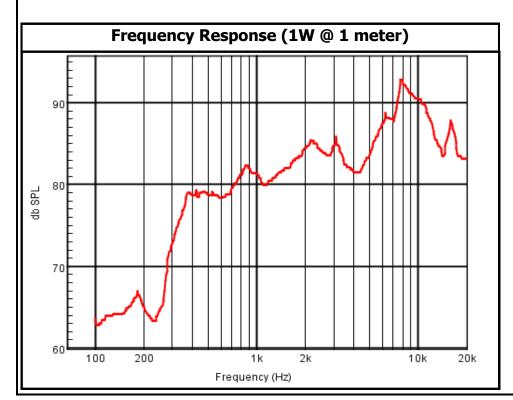








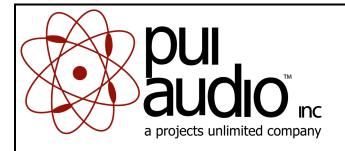

AS02808MR-R 28mm Speaker

Mechanical and Environment Testing				
Test Description	Test Condition			
High Temperature	60°C with random humidity for 96 hours			
Low Temperature	-30°C with random humidity for 96 hours			
Humidity	40°C with 90% to 95% relative humidity for 96 hours			
Vibration	1.5 mm movement modulated at 10 to 55 Hz for 2 hours			
Drop Test	75 cm free fall onto 40 mm thick board, 10 cycles			
Temperature Cycle Test	-30°C to 60°C, 5 cycles			
After tests, speaker shall rest for 1 hours. SPL shall not deviate ±3 dB from pre-test measurement.				

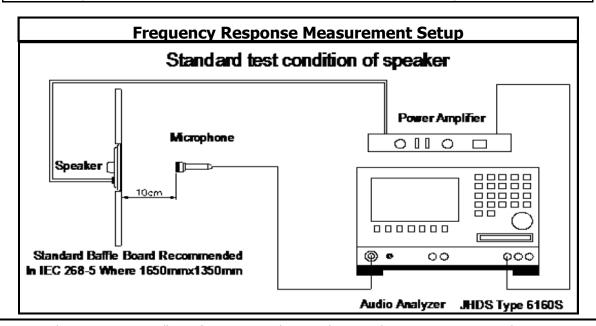



SPECIFICATIONS						
PARAMETERS	VALUES	UNITS				
RATED INPUT POWER	1	W				
MAX INPUT POWER	1.5	W				
IMPEDANCE	8 ± 15%	OHM				
OUTPUT SPL @ 1W/1M	80 + 3	٩D٨				
(AT 0.6, 0.8, 1.0, 1.2 kHz)	00±3	dBA				
DISTORTION (MAX.)	5%	-				
RESONANT FREQUENCY	500 ± 100	Hz				
FREQUENCY RANGE	500 ~ 20,000	Hz				
HOUSING MATERIAL	METAL	-				
CONE MATERIAL	MYLAR	-				
MAGNET MATERIAL	N35	-				
OPERATING TEMPERATURE	-20 ~ +60	°C				
WEIGHT	6.5	grams				

THIS DOCUMENT CONTAINS DATA PROPRIETARY TO PROJECTS UNLIMITED, INC. ANY USE OR REPRODUCTION, IN ANY FORM, WITHOUT PRIOR WRITTEN PERMISSION OF PROJECTS UNLIMITED, INC. IS PROHIBITED.

©2003, Projects Unlimited Inc.

١		REVISION HISTORY		
	LTR	DESCRIPTION	DATE	APPROVED
ı		RELEASED FROM ENGINEERING	2/16/2006	
ı	Α	REVISED PART DIMENSION	4/3/2007	B.R.
ı	В	REVISED TO INVENTOR 3-D DRAWING TEMPLATE	11/13/2007	B.R.
ı	C	REVISED POWER RATING AND DIMENSIONS	11/1/2013	M.L.

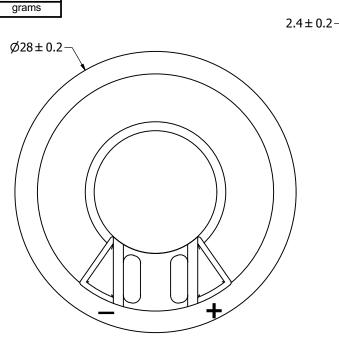

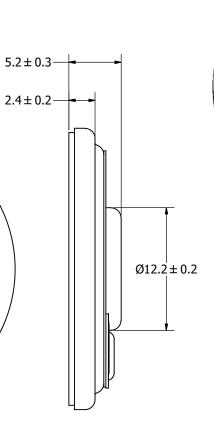



- 1. ALL DIMENSIONS ARE IN MILLIMETERS.
- 2. SPECIFICATIONS SUBJECT TO CHANGE OR WITHDRAWL WITHOUT NOTICE.
- 3. THIS PART IS RoHS 2011/65/EU COMPLIANT.

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS,		Designed by	Date	Checked by	Date	Approved by	Date	Drawn Date
	SIZE	J.A.F.	2/16/2006	E.P.	2/16/2006	B.R.	2/16/2006	11/13/2007
	^ ^	o Onu		AS02808MR-R				

AS02808MR-R.idw

TOLERANCES

ARE ±3°.

AS02808MR-R.idw

TOLERANCES

AS02808MR-R.idw

AS02808MR-R.idw

Speaker Edition Sheet 1/1

4