

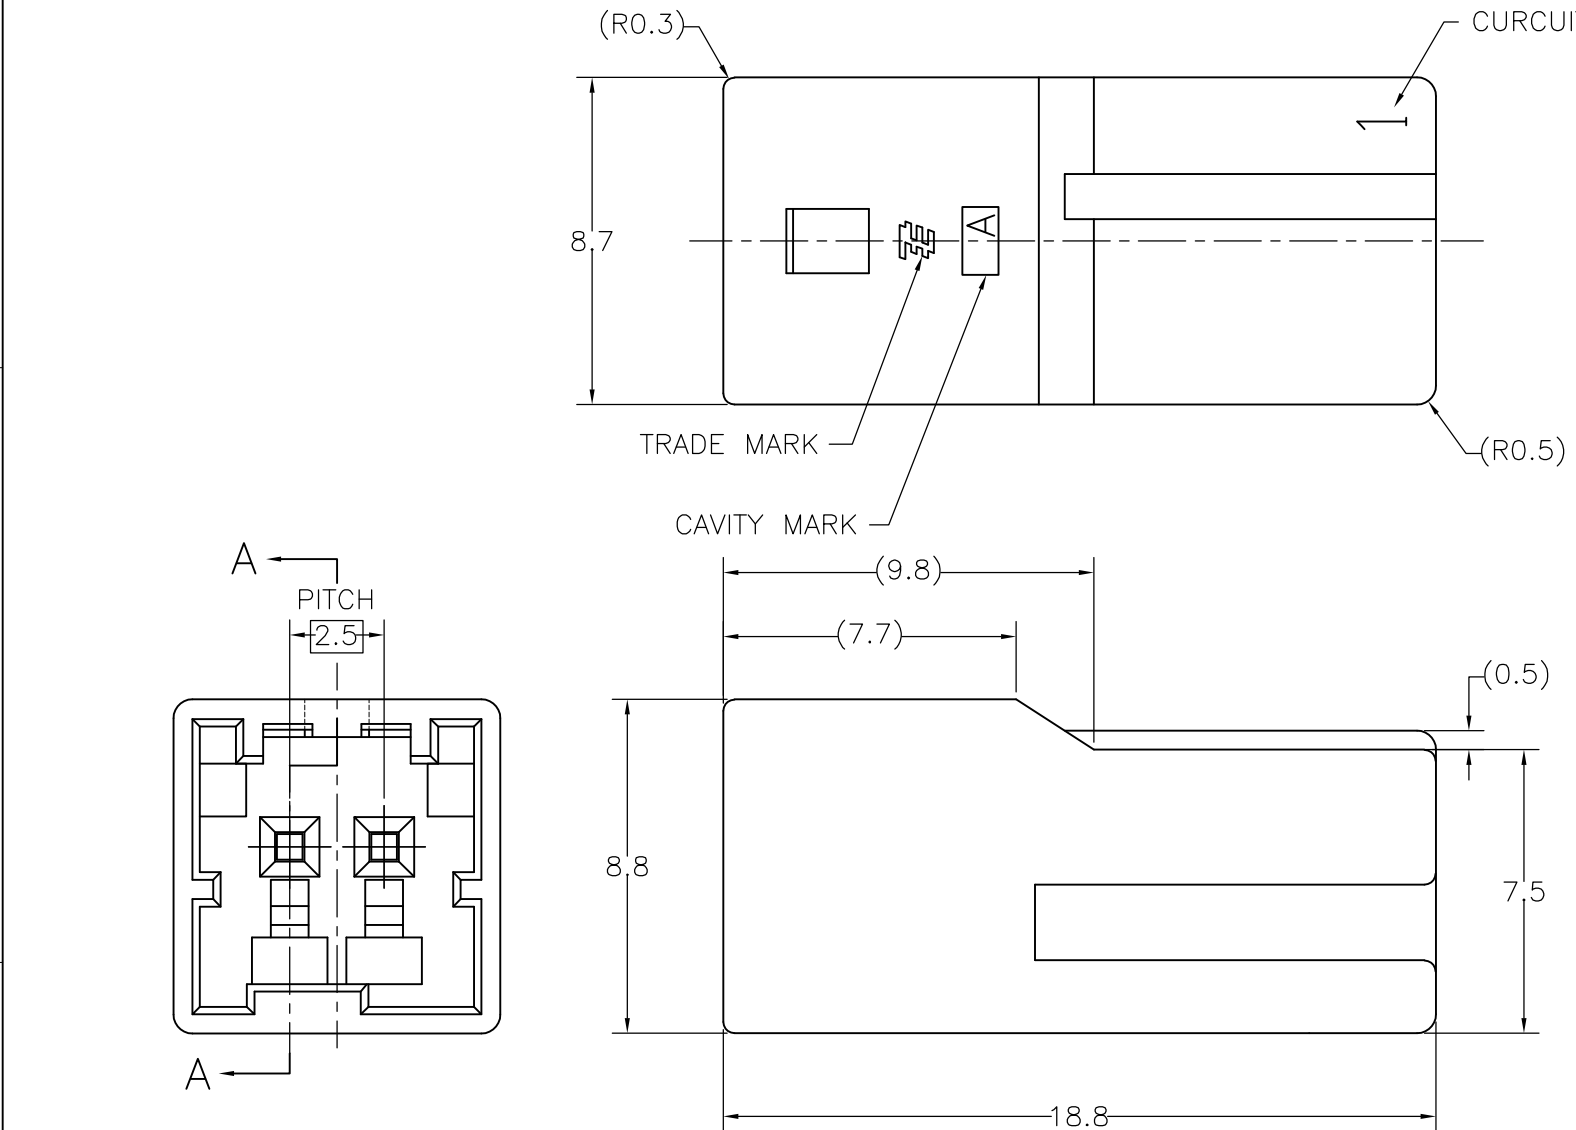


LOC	DIST	REVISIONS			
		P	LTR	DESCRIPTION	DATE
J	—		B1	REVISED PER ECR-10-019980	04OCT10

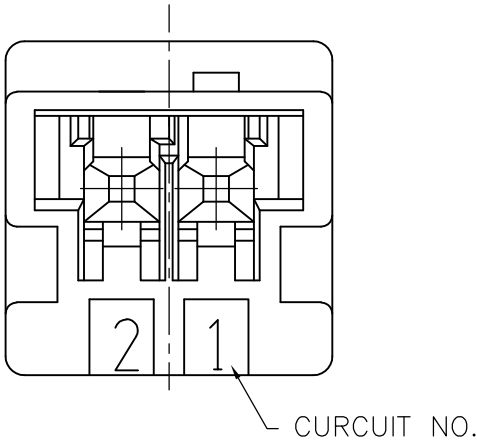

TYPE OF KEYING

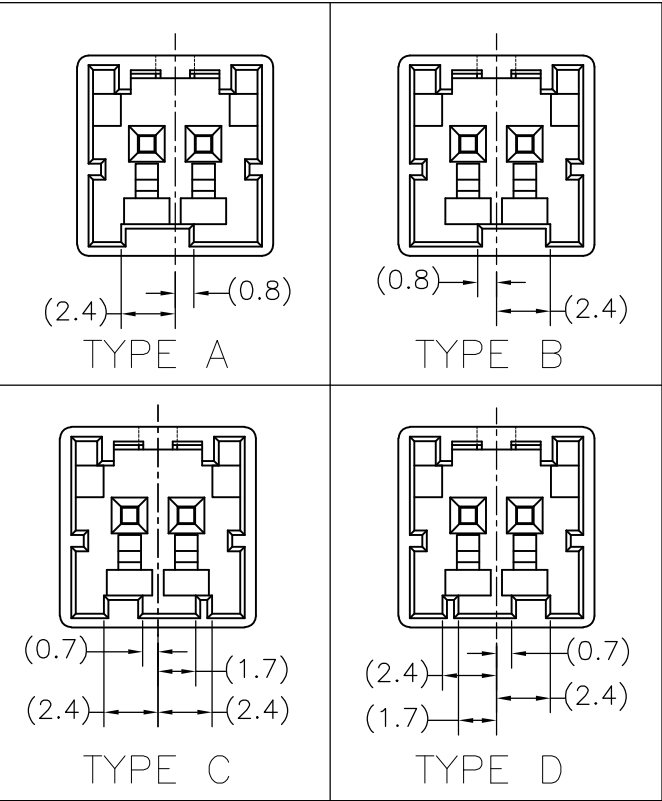

注記

1. 一般公差: ±0.3

△ 材料PBTガラス強化(UL94V-0)

△ かん合相手製品型番

プラグハウジング: TABLE参照のこと

タブコンタクト: 917764, 917765

NOTE

1. GENERAL TOLERANCE: ±0.3

△ MATERIAL: PBT GLASS FILLED (UL94V-0)

△ MATING CONN. P/N

PLUG HOUSING: SEE TABLE

TAB CONTACT: 917764, 917765

断面 A-A
SECT A-A

4-1903388-2	TYPE B	BLACK 黒色	4-1903391-2
3-1903388-4	TYPE D	YELLOW 黄色	3-1903391-4
2-1903388-3	TYPE C	BLUE 青色	2-1903391-3
1-1903388-2	TYPE B	RED 赤色	1-1903391-2
1903388-1	TYPE A	NATURAL 自然色	1903391-1
△ かん合相手型番 MATING HSG P/N	キーイング形状 TYPE OF KEYING	色調 COLOR	型番 PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J. SATO	31OCT05	Tyco Electronics AMP K.K. Kawasaki, Japan			
DIMENSIONS: 単位: 耗 mm		CHK T. HATANO	31OCT05				
TOLERANCES UNLESS OTHERWISE SPECIFIED: 一般公差		APVD N. YAMASAKI	31OCT05	NAME 名称 GRACE INERTIA CONNECTOR 2.5 W CAP HOUSING 2P			
0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ± FINISH 仕上		PRODUCT SPEC 製品規格 108-78350		SIZE A3			
MATERIAL 材料 SEE NOTE △		APPLICATION SPEC 取付適用規格		CAGE CODE 00779			
		WEIGHT		DRAWING NO 番号 C-1903391			
		CUSTOMER DRAWING		RESTRICTED TO —			
				SCALE 尺度 5:1			
				SHEET 1 OF 1			
				REV B1			

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[3-1903391-4](#)