


(1.27 mm) .050"

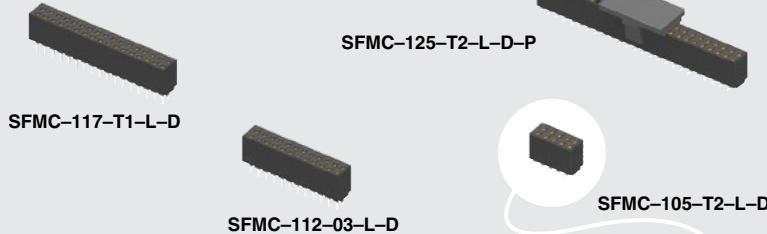

SFMC SERIES

FLEXIBLE PIN COUNT TIGER EYE™ SOCKETS

SPECIFICATIONS

For complete specifications and recommended PCB layouts see www.samtec.com?SFMC

Insulator Material:
Black Liquid Crystal Polymer

Contact Material:
Tiger Eye™ = BeCu
Tiger Eye™ LITE = Phosphor Bronze

Plating:
Au or Sn over 50 μ " (1.27 μ m) Ni

Current Rating:
2.9 A per pin (2 pins powered)

Voltage Rating:
220 VAC/310 VDC

Operating Temp Range:
-55 °C to +125 °C

Insertion Depth:
(3.05 mm) .120" to (4.06 mm) .160"

Normal Force:
Standard= 132 g (1.29 N) avg.
LIF= 90 g (0.88 N) avg.

Max Cycles:
10,000 with 30 μ " (0.76 μ m) Au
RoHS Compliant: Yes

PROCESSING

Lead-Free Solderable:
Yes

SMT Lead Coplanarity:
(0.10 mm) .004" max (02-26)
(0.15 mm) .006" max (27-50)*
*(.004" stencil solution may be available; contact IPG@samtec.com)

RECOGNITIONS

For complete scope of recognitions see www.samtec.com/quality



ALSO AVAILABLE (MOQ Required)

- Other platings

Note:
Some sizes, styles and options are non-standard, non-returnable.

Board Mates:

TFM

Cable Mates:


FMTP, FFMD*

Note: Standard FFMD callout will not mate with FLE, SFMC. Must use gold plated callouts. (See drawing on web.)



High-reliability
Tiger Eye™
contacts

Any number of
positions from
2 through 50

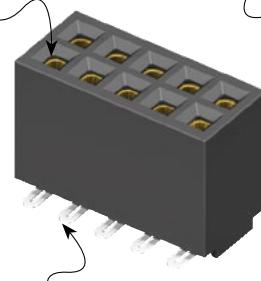

Slotted SMT tails

Available with optional
pick & place pads

HIGH-SPEED CHANNEL PERFORMANCE

Rating based on Samtec reference channel.
For full SI performance data visit Samtec.com or contact SIG@samtec.com

8
G b p s

SFMC



1

NO. PINS
PER ROW

02 thru 50



LEAD
STYLE-01, -03
= Through-hole-L1, -L3
= Low Insertion Force
Through-hole-02
= Surface Mount-L2
= Low Insertion Force
Surface Mount-T1
= Through-hole
Tiger Eye™ LITE-T2
= Surface Mount
Tiger Eye™ LITEPLATING
OPTION-L
= 10 μ " (0.25 μ m)
Gold on contact,
Matte Tin on tail-K
= (4.00 mm) .157
DIA Polyimide
film Pick &
Place Pad
(4 positions
minimum)-P
= Plastic Pick &
Place Pad
(5 positions
minimum)-TR
= Tape & Reel

| LEAD STYLE | A | B |
|---------------|----------------|----------------|
| -01, -L1, -T1 | (3.05) .120 | (3.05) .020 |
| -03, -L3 | (1.91) .075 | (0.41) .016 |

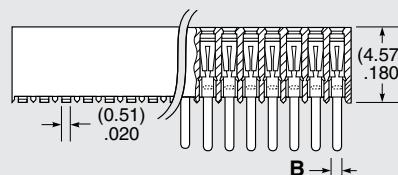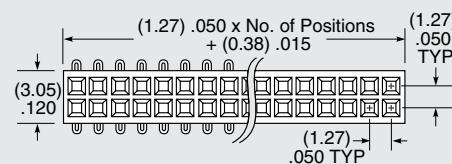

| | |
|--|------------------------------------|
| LEAD STYLE | -01, -03 = Through-hole |
| -L1, -L3 = Low Insertion Force Through-hole | |
| -02 = Surface Mount | |
| -L2 = Low Insertion Force Surface Mount | |
| -T1 = Through-hole Tiger Eye™ LITE | |
| -T2 = Surface Mount Tiger Eye™ LITE | |

| | |
|--|------------------------------------|
| LEAD STYLE | -01, -03 = Through-hole |
| -L1, -L3 = Low Insertion Force Through-hole | |
| -02 = Surface Mount | |
| -L2 = Low Insertion Force Surface Mount | |
| -T1 = Through-hole Tiger Eye™ LITE | |
| -T2 = Surface Mount Tiger Eye™ LITE | |



Due to technical progress, all designs, specifications and components are subject to change without notice.

WWW.SAMTEC.COM

All parts within this catalog are built to Samtec's specifications.

Customer specific requirements must be approved by Samtec and identified in a Samtec customer-specific drawing to apply.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Samtec:

[SFMC-115-02-S-D](#) [SFMC-105-03-S-D](#) [SFMC-105-L3-S-D](#) [SFMC-110-T1-S-D](#) [SFMC-113-02-S-D](#) [SFMC-116-02-S-D](#) [SFMC-105-01-L-D](#) [SFMC-117-02-S-D](#) [SFMC-118-01-S-D](#) [SFMC-104-T1-S-D](#) [SFMC-103-02-L-D](#) [SFMC-105-02-S-D-P-TR](#) [SFMC-108-02-S-D-K-TR](#) [SFMC-110-01-S-D](#) [SFMC-125-01-S-D](#) [SFMC-120-02-L-D](#) [SFMC-120-01-S-D](#) [SFMC-108-02-S-D](#) [SFMC-110-01-L-D](#) [SFMC-140-01-S-D](#) [SFMC-125-T2-L-D](#) [SFMC-116-01-S-D](#) [SFMC-104-01-L-D](#) [SFMC-122-01-L-D](#) [SFMC-118-02-L-D](#) [SFMC-104-02-L-D-K-TR](#) [SFMC-108-03-L-D](#) [SFMC-112-L1-S-D](#) [SFMC-115-01-S-D](#) [SFMC-108-02-L-D](#) [SFMC-104-03-S-D](#) [SFMC-118-02-S-D](#) [SFMC-120-L2-S-D](#) [SFMC-103-01-S-D](#) [SFMC-105-02-L-D](#) [SFMC-107-01-L-D](#) [SFMC-108-01-L-D](#) [SFMC-118-T2-L-D-TR](#) [SFMC-105-T2-S-D](#) [SFMC-140-L1-S-D](#) [SFMC-104-02-L-D](#) [SFMC-103-02-S-D](#) [SFMC-110-03-L-D](#) [SFMC-117-03-S-D](#) [SFMC-105-T1-S-D](#) [SFMC-106-01-S-D](#) [SFMC-110-03-S-D](#) [SFMC-115-01-L-D](#) [SFMC-120-01-L-D](#) [SFMC-125-03-S-D](#) [SFMC-107-01-S-D](#) [SFMC-103-01-L-D](#) [SFMC-108-03-S-D](#) [SFMC-104-02-S-D-K-TR](#) [SFMC-102-01-S-D](#) [SFMC-109-L3-S-D](#) [SFMC-122-01-S-D](#) [SFMC-117-01-S-D](#) [SFMC-104-01-S-D](#) [SFMC-103-T1-S-D](#) [SFMC-107-02-S-D-P-TR](#) [SFMC-112-01-L-D](#) [SFMC-105-02-S-D](#) [SFMC-112-03-L-D](#) [SFMC-105-02-S-D-K-TR](#) [SFMC-107-02-S-D](#) [SFMC-110-02-S-D](#) [SFMC-118-01-L-D](#) [SFMC-102-01-L-D](#) [SFMC-104-03-L-D](#) [SFMC-105-01-S-D](#) [SFMC-112-01-S-D](#) [SFMC-120-02-S-D](#) [SFMC-105-02-L-D-K-TR](#) [SFMC-108-01-S-D](#) [SFMC-125-02-S-D](#) [SFMC-111-01-L-D](#) [SFMC-110-02-L-D](#) [SFMC-114-01-L-D](#) [SFMC-130-01-S-D](#) [SFMC-104-02-S-D](#) [SFMC-104-T2-S-D](#) [SFMC-105-T2-SM-D](#) [SFMC-106-T2-S-D-K-TR](#) [SFMC-105-T2-S-D-P-TR](#) [SFMC-104-T1-L-D-K](#) [SFMC-105-T2-S-D-K](#) [SFMC-104-02-L-D-TR](#) [SFMC-102-02-L-D](#) [SFMC-103-L2-L-D](#) [SFMC-105-T2-L-D-K-TR](#) [SFMC-104-L2-L-D](#) [SFMC-110-T2-L-D-TR](#) [SFMC-104-L2-S-D-TR](#) [SFMC-105-T2-L-D-TR](#) [SFMC-108-T2-L-D-K-TR](#) [SFMC-105-T2-L-D](#) [SFMC-110-T2-SM-D-K-TR](#) [SFMC-102-T2-S-D](#) [SFMC-103-03-S-D](#)