

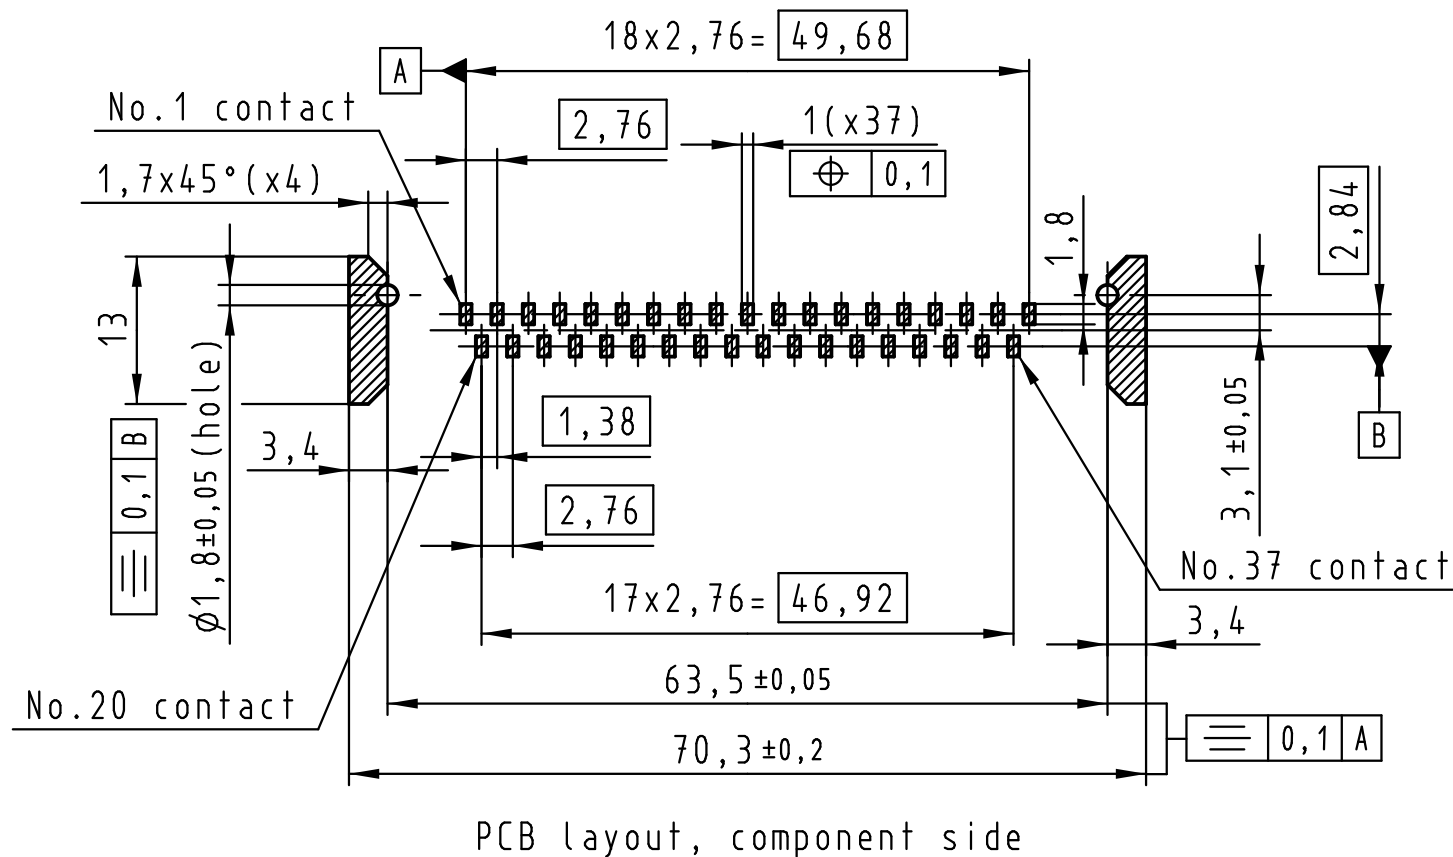
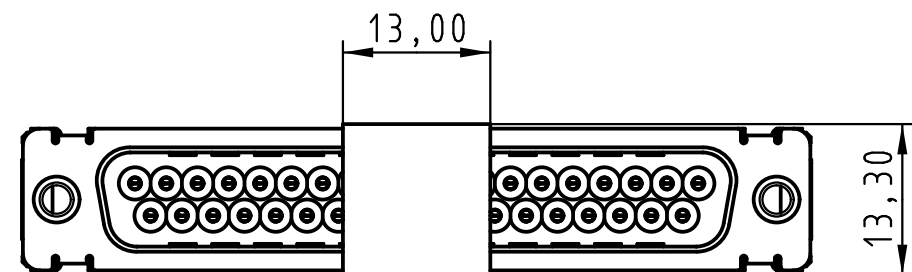
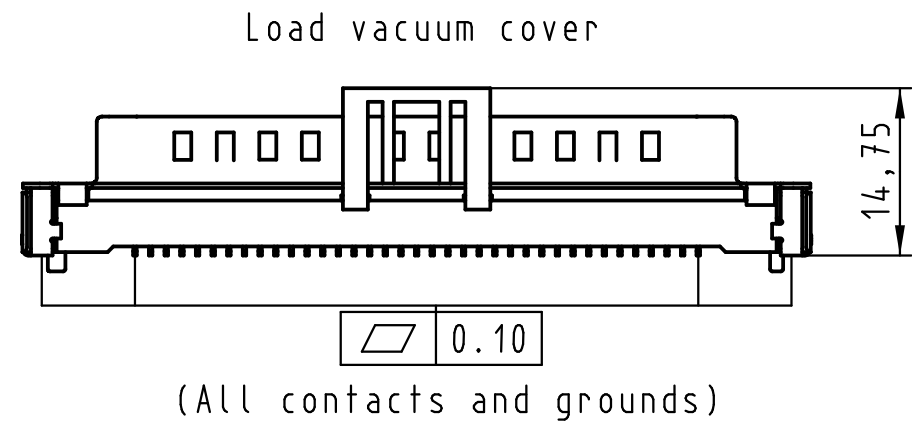

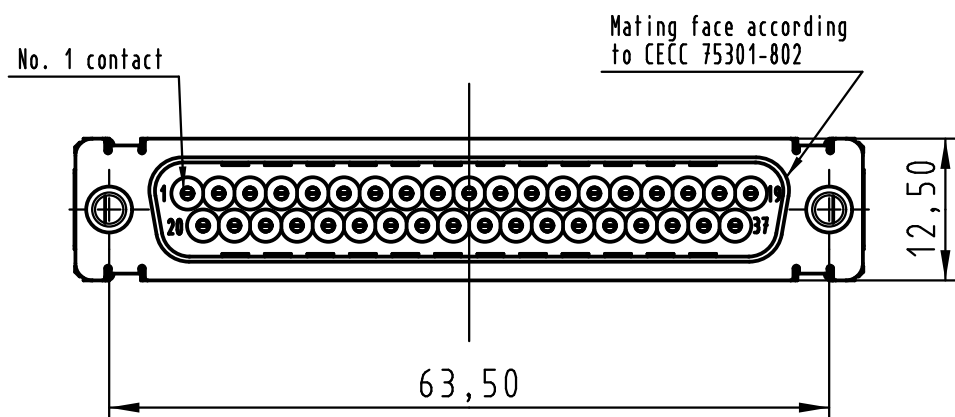


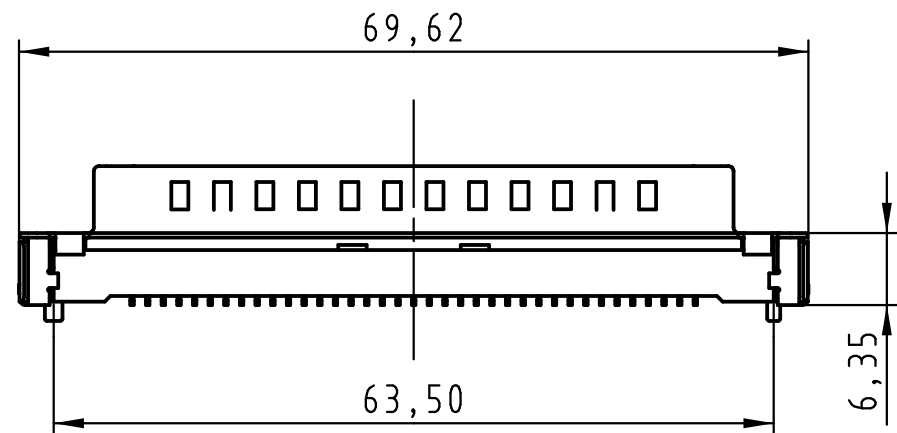



Max. Temperature: 260° during 10 seconds.

0955 429 3811 741	1	M3	Black insulator	Reel Packaging: 140 connectors (See details on page2/2)				
0955 429 3812 741	1	4-40 UNC						
0955 429 6811 741	2	M3						
0955 429 6812 741	2	4-40 UNC						
0955 429 7811 741	3	M3						
0955 429 7812 741	3	4-40 UNC						
Part number	PL	Nut	Index designation					
 All Dimensions in mm Original Size DIN A 3			Techn. Character.		Free size tolerances			
				Dat.	Name	Scale	D-Sub SMT, 37 poles Male, Straight with nuts and ground pads	
			Detail.	25-Oct-11	Johnson.S	1.5:1		
			Insp.	17-Nov-11	Steven.W			
			Stand.	17-Nov-11	Steven.W			
			Zhuhai HARTING Limited 				TB 09 55 429 x81x	Page 1 / 2
EC04070	17-Nov-11	Johnson.S					Sub.	
Mod.	Dat.	Name						


D-Sub SMT, 37 poles
Male, Straight
with nuts and ground pads

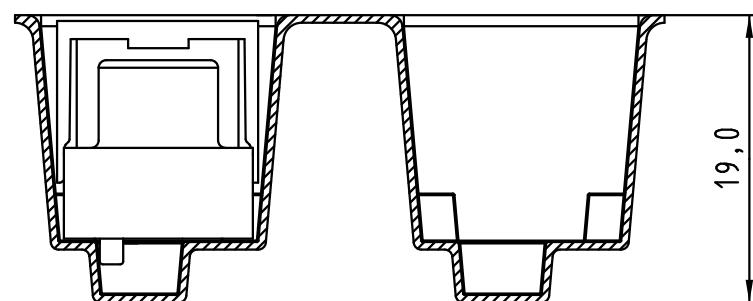

Detail A

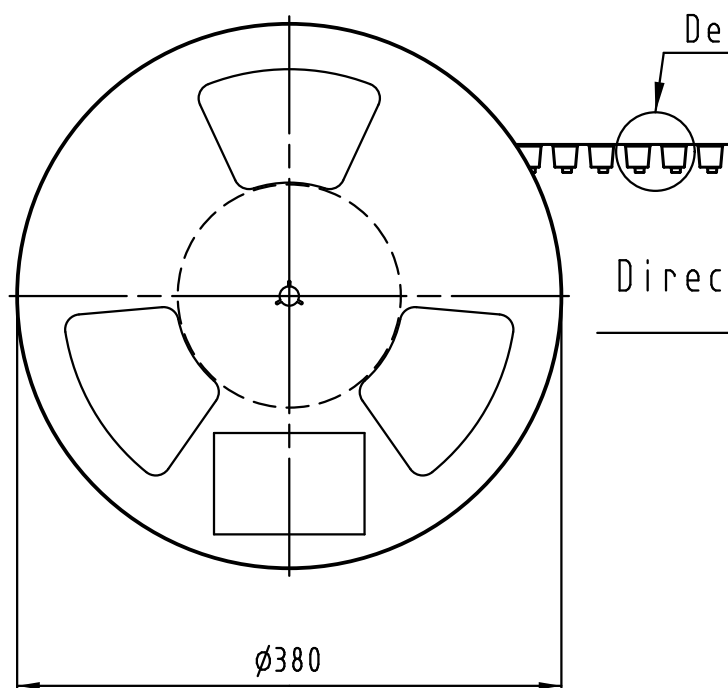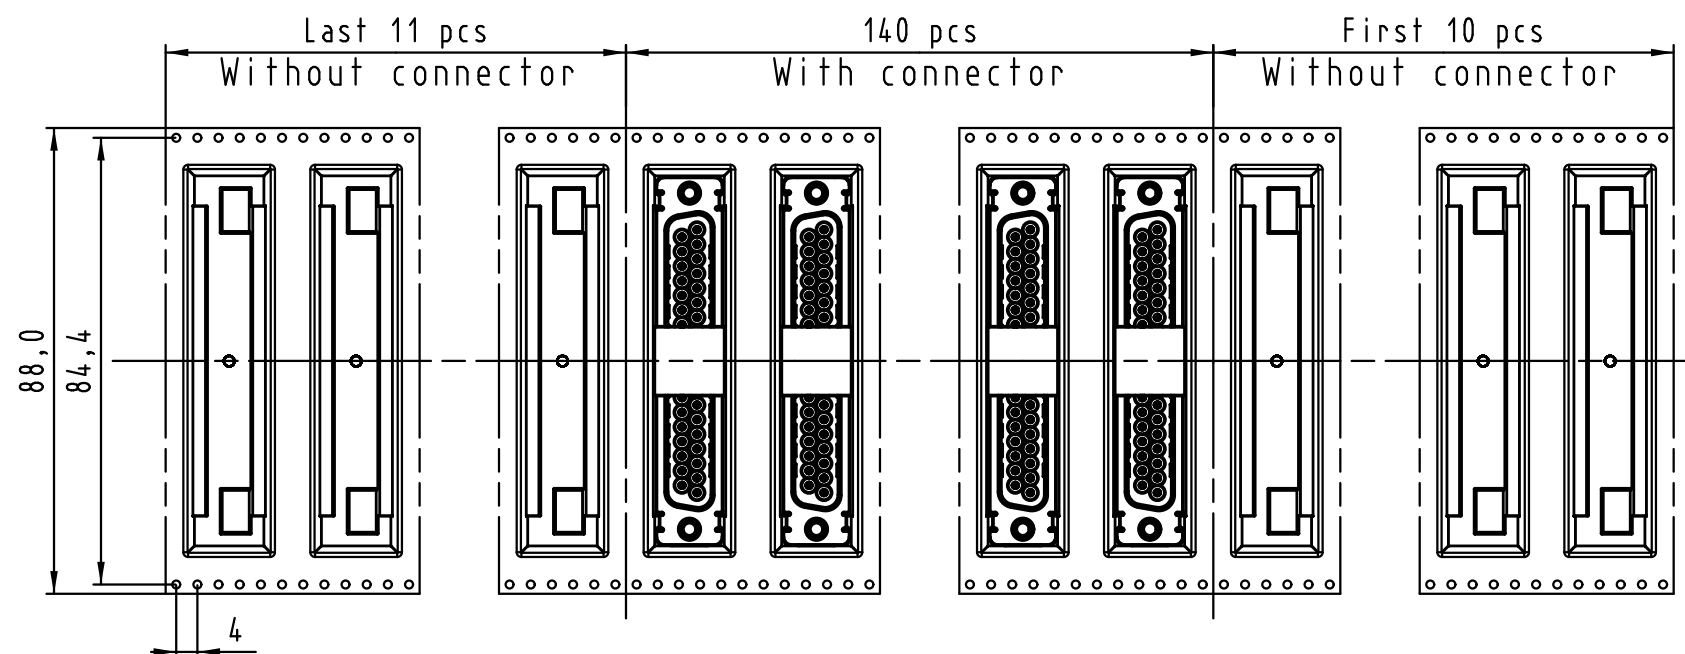

Direction of unreeling →

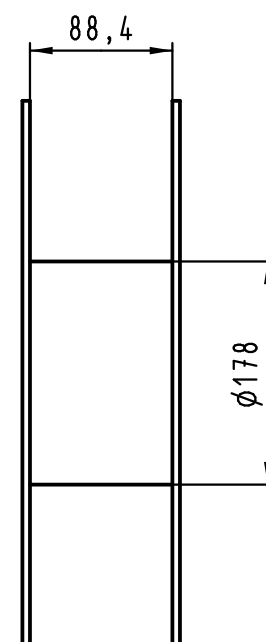

See TB 09 55 429 x81x folio 1/2
for connector dimensions
and PCB layout

Packaging in accordance with
EIA 481-2.

0955 429 3811 741	1	M3	Black insulator	Reel Packaging: 140 connectors
0955 429 3812 741	1	4-40 UNC		
0955 429 6811 741	2	M3		
0955 429 6812 741	2	4-40 UNC		
0955 429 7811 741	3	M3		
0955 429 7812 741	3	4-40 UNC	Index designation	
Part number	PL	Nut		

All Dimensions in mm Original Size DIN A 3			Techn. Character.			Free size tolerances	
				Dat.	Name	Scale	D-Sub SMT, 37 poles Male, Straight with nuts and ground pads
			Detail.	25-Oct-11	Johnson.S		
			Insp.	17-Nov-11	Steven.W		
			Stand.	17-Nov-11	Steven.W		TB 09 55 429 x81x
EC04070	17-Nov-11	Johnson.S	Zhuhai HARTING Limited				
Mod.	Dat.	Name				Sub.	Page 2/2

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

HARTING:

[09554293822741](#) [09554293821741](#) [09554293811741](#) [09554293812741](#)