

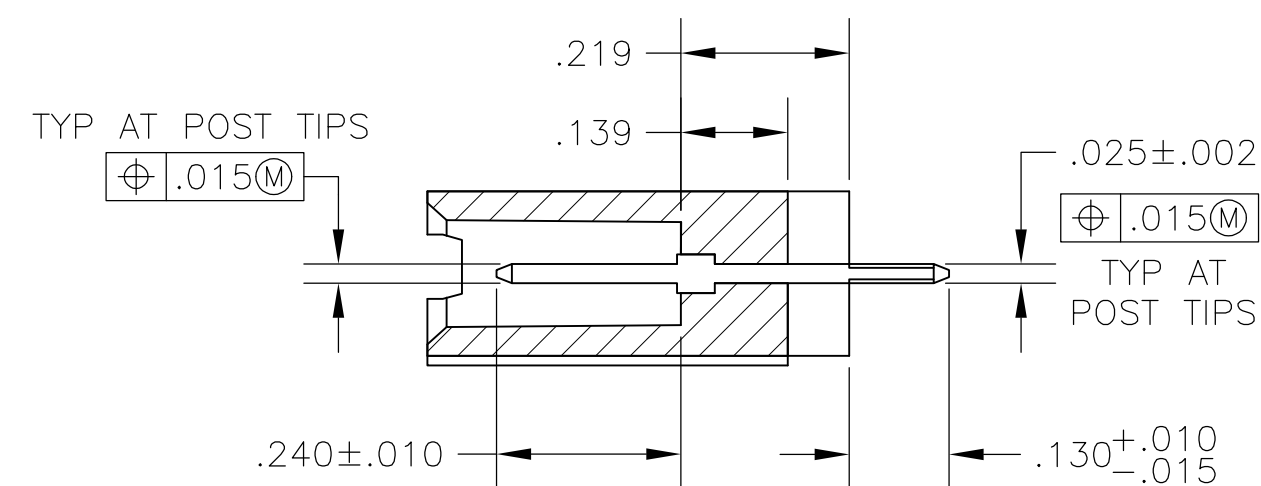
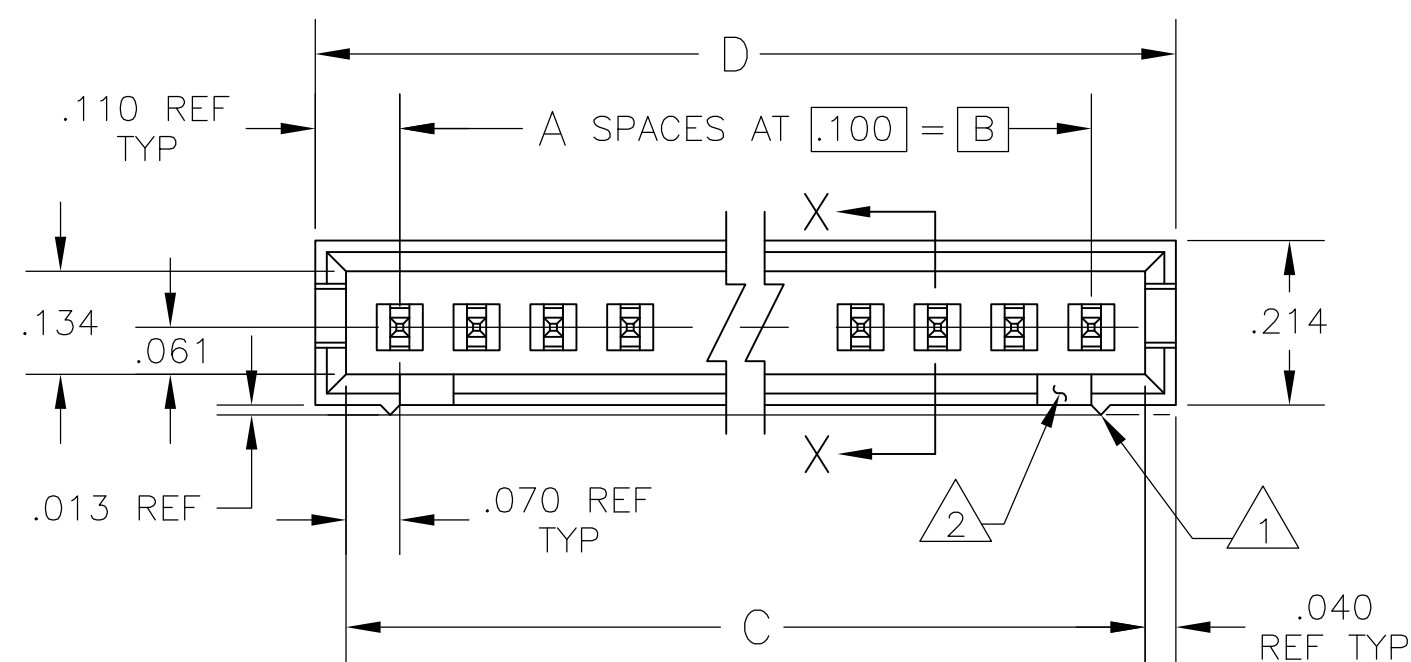
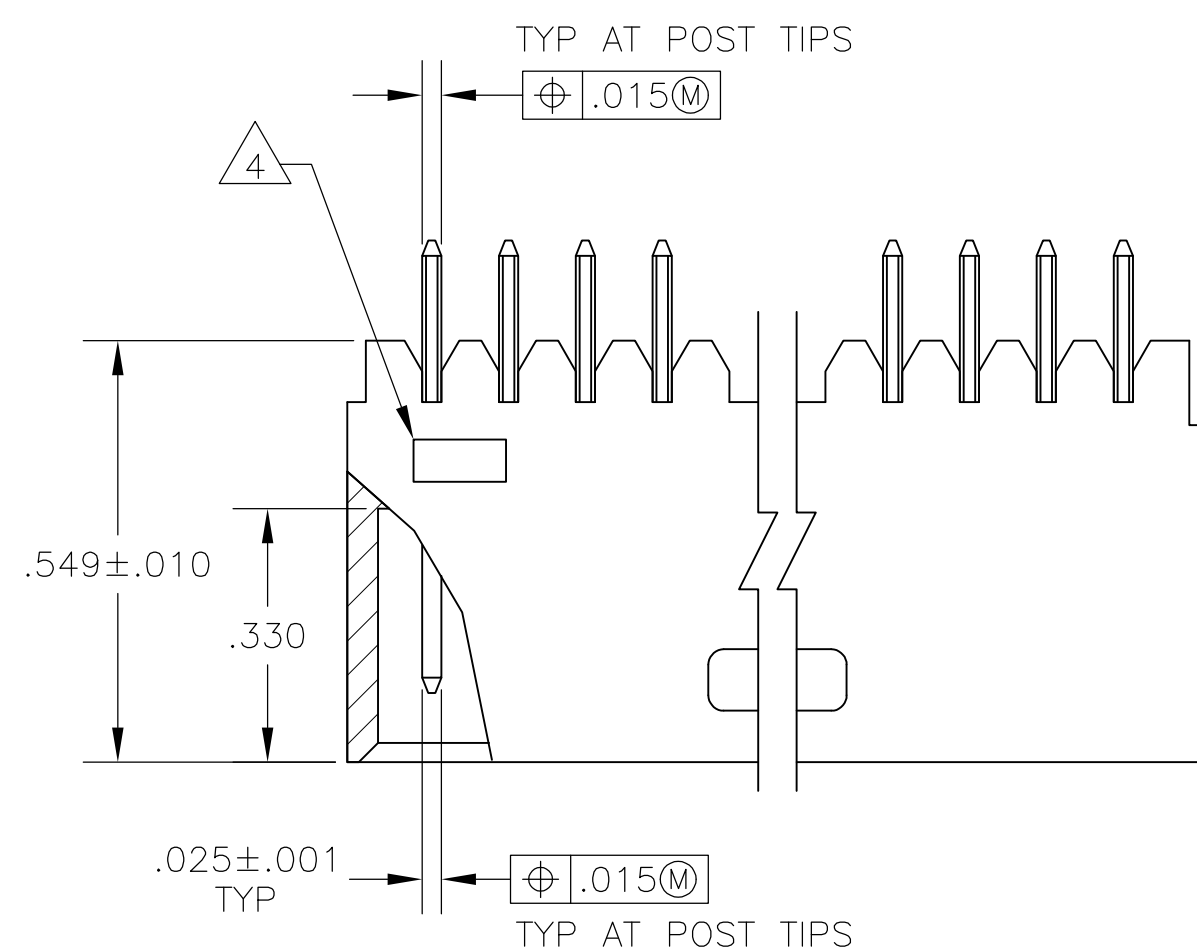


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
AD	00		V2	REVISED PER ECO-11-004587	11MAR11	RK	HMR

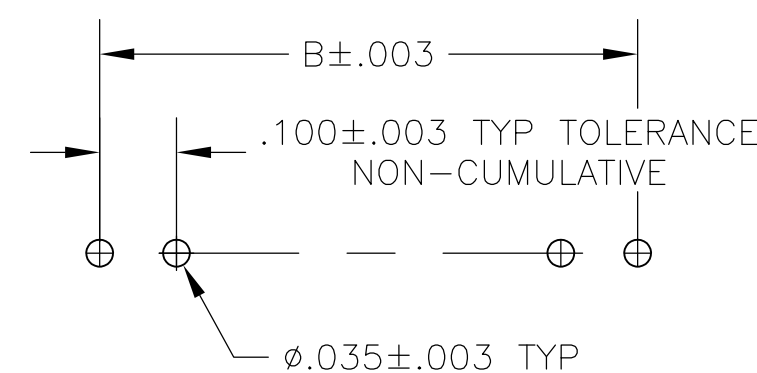

SECTION X-X

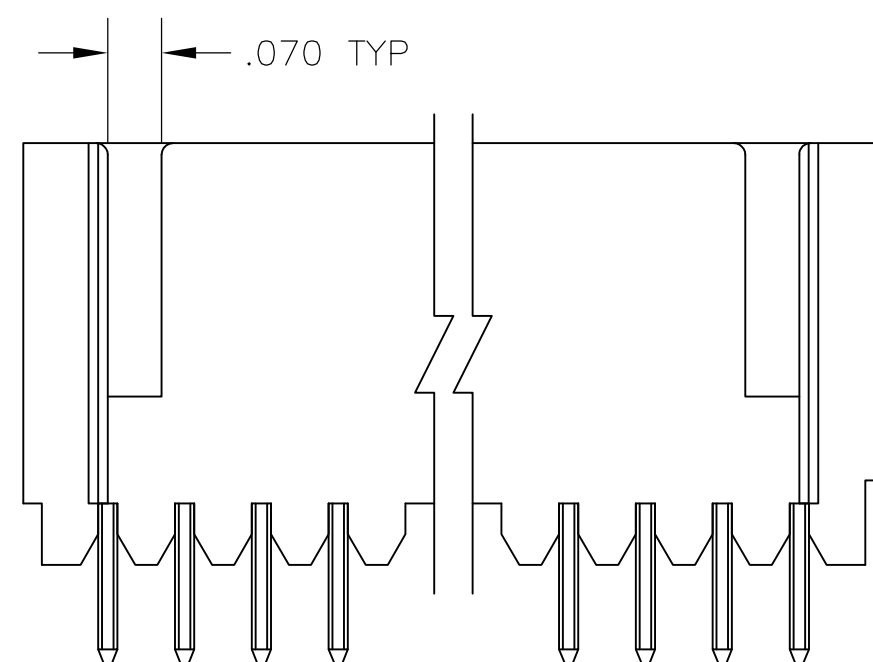


RECOMMENDED HOLE LAYOUT

- 1 STANDOFFS:
UP TO 9 POS—(2 REQD) ON THE OUTSIDE
ENDS OF THE HOUSING.
10 TO 19 POS—(3 REQD) TWO ON THE
OUTSIDE ENDS AND ONE CENTERED ON
THE HOUSING.

19 POS AND ABOVE—(4 REQD) TWO ON THE
OUTSIDE ENDS AND TWO SPACED EVENLY
WITHIN THE REMAINING LENGTH OF THE
HOUSING.
- 2 FOR 3 POS. ONLY, ONE SLOT (.215 WIDE).
- 3 INDICATED PARTS ARE PACKAGED IN
"GANG-OF-TUBES".
- 4 RECESSED DATE CODE
- 5 .000100—.000200 BRIGHT TIN-LEAD OVER .000050 NICKEL.
- 6 .000100—.000200 BRIGHT TIN OVER .000050 NICKEL.
- 7 PRELIMINARY PART
- 8 .000100—.000200 MATTE TIN OVER .000050 NICKEL.
- 9 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINIS

OBSOLETE 9	8	2.620	2.540	2.400	24	25	7-103080-3			
	8	2.520	2.440	2.300	23	24	7-103080-2			
	8	2.420	2.340	2.200	22	23	7-103080-1			
	8	2.320	2.240	2.100	21	22	7-103080-0			
	8	2.220	2.140	2.000	20	21	6-103080-9			
	8	2.120	2.040	1.900	19	20	6-103080-8			
	8	2.020	1.940	1.800	18	19	6-103080-7			
	8	1.920	1.840	1.700	17	18	6-103080-6			
	8	1.820	1.740	1.600	16	17	6-103080-5			
	8	1.720	1.640	1.500	15	16	6-103080-4			
	8	1.620	1.540	1.400	14	15	6-103080-3			
	8	1.520	1.440	1.300	13	14	6-103080-2			
	8	1.420	1.340	1.200	12	13	6-103080-1			
	8	1.320	1.240	1.100	11	12	6-103080-0			
	8	1.220	1.140	1.000	10	11	5-103080-9			
	8	1.120	1.040	.900	9	10	5-103080-8			
	8	1.020	.940	.800	8	9	5-103080-7			
	8	.920	.840	.700	7	8	5-103080-6			
	8	.820	.740	.600	6	7	5-103080-5			
	7	8	.720	.640	.500	5	6	5-103080-4		
8		.620	.540	.400	4	5	5-103080-3			
8		.520	.440	.300	3	4	5-103080-2			
8		.420	.340	.200	2	3	5-103080-1			
6		1.020	.940	.800	8	9	4-103080-0			
6		.520	.440	.300	3	4	3-103080-9			
6		.420	.340	.200	2	3	3-103080-8			
6		.520	.440	.300	3	4	3-103080-7			
6		.620	.540	.400	4	5	3-103080-6			
5		.620	.540	.400	4	5	3-103080-5			
3	OBSOLETE	5	3.820	3.640	3.500	35	36	3-103080-4		
OBSOLETE	5	3.720	3.540	3.400	34	35	3-	-3		
OBSOLETE	5	3.620	3.440	3.300	33	34	3-	-2		
OBSOLETE	5	3.420	3.340	3.200	32	33	3-	-1		
OBSOLETE	5	3.320	3.240	3.100	31	32	3-	-0		
OBSOLETE	5	3.220	3.140	3.000	30	31	2-	-9		
OBSOLETE	5	3.120	3.040	2.900	29	30	2-	-8		
OBSOLETE	5	3.020	2.940	2.800	28	29	2-	-7		
OBSOLETE	5	2.920	2.840	2.700	27	28	2-	-6		
OBSOLETE	5	2.820	2.740	2.600	26	27	2-	-5		
OBSOLETE	5	2.720	2.640	2.500	25	26	2-	-4		
OBSOLETE 9	5	2.620	2.540	2.400	24	25	2-	-3		
	5	2.520	2.440	2.300	23	24	2-	-2		
	5	2.420	2.340	2.200	22	23	2-	-1		
	5	2.320	2.240	2.100	21	22	2-	-0		
	5	2.220	2.140	2.000	20	21	1-	-9		
	5	2.120	2.040	1.900	19	20	1-	-8		
	5	2.020	1.940	1.800	18	19	1-	-7		
	5	1.920	1.840	1.700	17	18	1-	-6		
	5	1.820	1.740	1.600	16	17	1-	-5		
	5	1.720	1.640	1.500	15	16	1-	-4		
9	OBSOLETE	5	1.620	1.540	1.400	14	15	1-	-3	
	5	1.520	1.440	1.300	13	14	1-	-2		
	5	1.420	1.340	1.200	12	13	1-	-1		
	5	1.320	1.240	1.100	11	12	1-	-0		
	5	1.220	1.140	1.000	10	11		-9		
	5	1.120	1.040	.900	9	10		-8		
	5	1.020	.940	.800	8	9		-7		
	5	.920	.840	.700	7	8		-6		
	5	.820	.740	.600	6	7		-5		
	5	.720	.640	.500	5	6		-4		
	5	.620	.540	.400	4	5		-3		
	5	.520	.440	.300	3	4		-2		
	5	.420	.340	.200	2	3		103080-1		
	FINISH	D	C	B	A	NO OF POS	ASSEMBLY PART NUMBER			

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 17AUG92 CHK J. MARTINELLI -		 TE Connectivity	
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 P/LC ± . 1 P/LC ± . 2 P/LC ± .02 3 P/LC ± .005 4 P/LC ± . ANGLES ± .		NAME APVD H. PALFY 21AUG92 PRODUCT SPEC — APPLICATION SPEC —	
		WEIGHT —		SIZE A1 CAGE CODE 00779 DRAWING NO. C-103080	
MATERIAL RETARDANT THERMOPLASTIC, COLOR-BLACK POSTS-BRASS		FINISH SEE TABLE		RESTRICTED TO —	
		CUSTOMER DRAWING		SCALE 4:1 SHEET 1 of 1 REV V	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-103080-2](#)