


2		1				
LOC	DIST	REVISIONS				
G	14	P	LTR	DESCRIPTION	DATE	APVD
		C		REVISED PER 0L20-0220-97	020CT97	DKS MJS

D

C

B

A

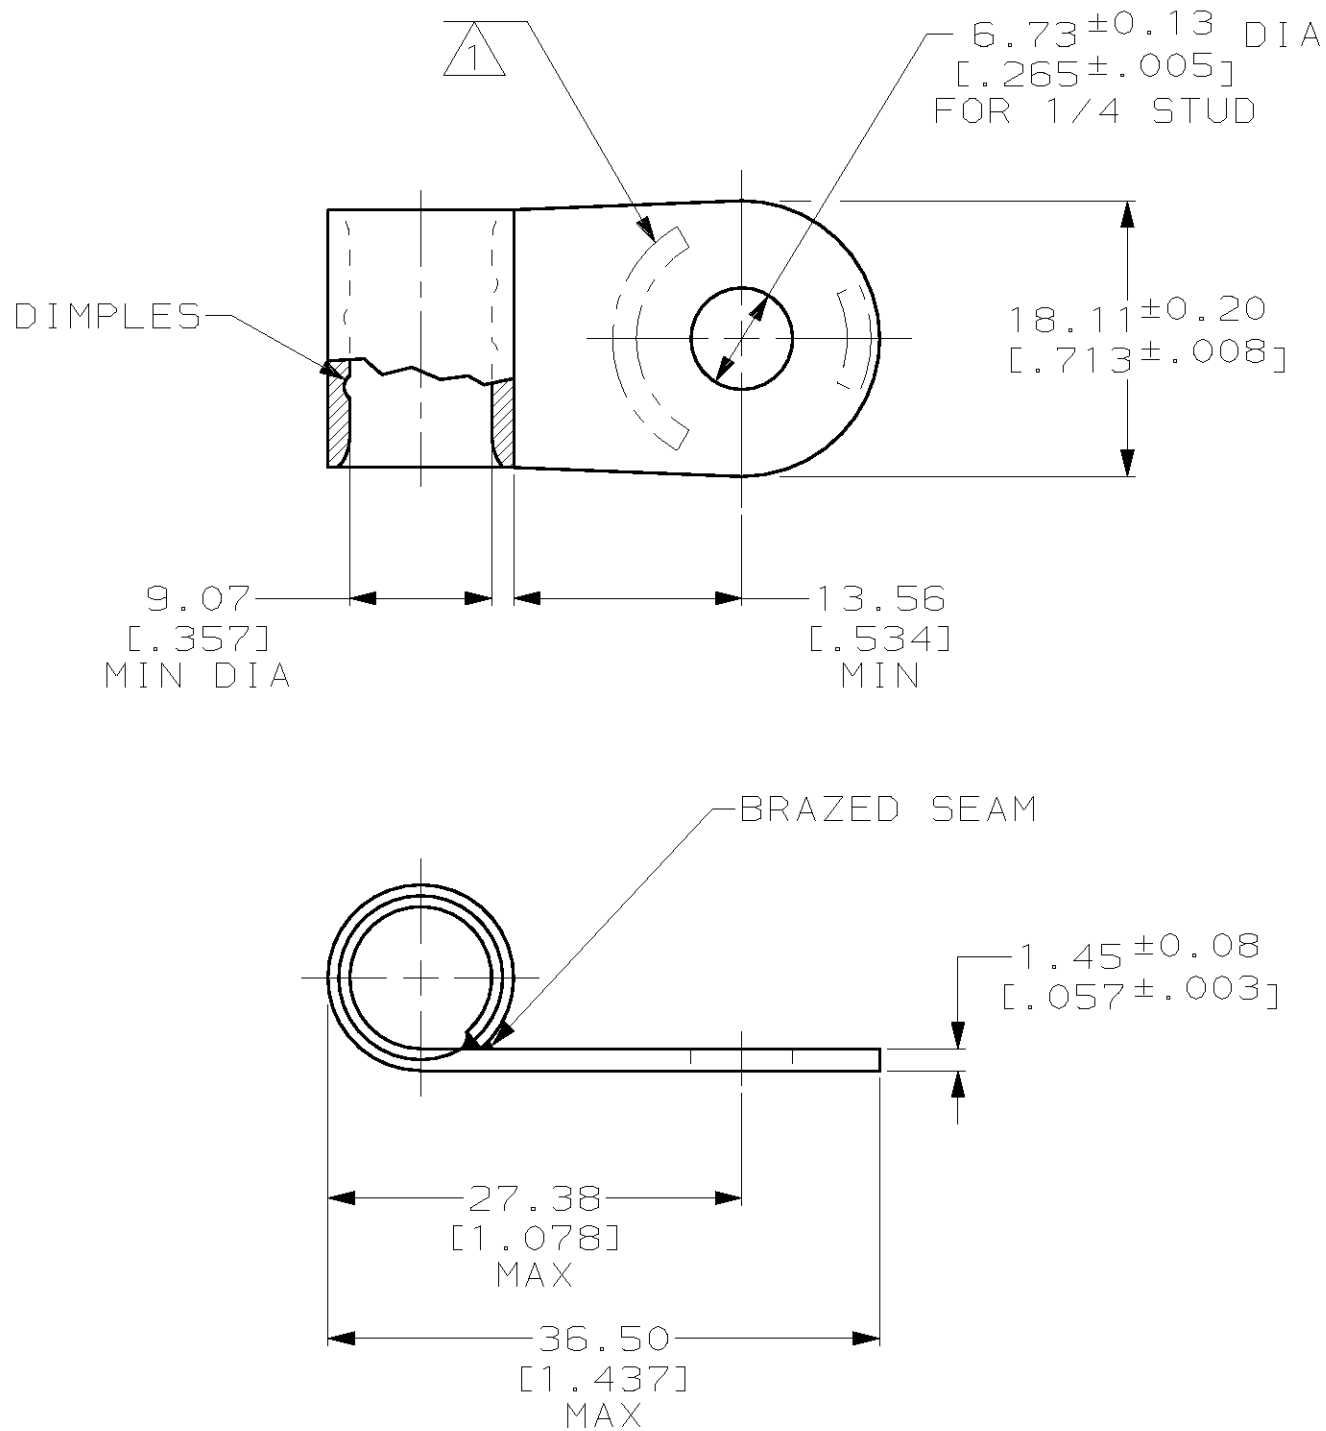

1 STAMP AMP 2W* 60-75 APPROX AS SHOWN

321201
AMP
PART NUMBER

AMP INCORPORATED CUSTOMER SERVICE SYSTEMS				THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.		DWN DK SCHRUM 020CT97 CHK MJ SPICER 030CT97 APVD JL MECKLEY 030CT97 PRODUCT SPEC APPLICATION SPEC WEIGHT -		AMP Incorporated Harrisburg, PA 17105-3608		
FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS	PRODUCT INFORMATION CENTER 1-800-522-6752	RECOMMENDED OPERATING TEMPERATURE: 170°C MAX		DIMENSIONS: mm [INCHES] 	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±- 1 PLC ±- 2 PLC ±0.20 [0.008] 3 PLC ±- 4 PLC ±- ANGLES ±-	NAME TERMINAL, RING TONGUE, FLAG, SOLISTRAND™				
		VOLTAGE RATING: NOT APPLICABLE					SIZE A3	CAGE CODE 00779	DRAWING NO C-321201	
FOR APPLICATION TOOLING INFORMATION	TOOLING ASSISTANCE CENTER 1-800-722-1111	WIRE CROSS SECTIONAL AREA RANGE: 26.7-42.4mm² [52,600-83,700] CIR MILS SOLID OR STRANDED		MATERIAL COPPER PER ASTM B-152 ANNEALED	FINISH TIN PLATE 0.00254 [0.000100] MIN THK PER ASTM B-545	CUSTOMER DRAWING		SCALE 2:1	SHEET 1 OF 1	REV C
FOR ORDER ENTRY	1-800-526-5142									

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[321201](#)