


SERIES 395...3XX • RIGHT ANGLE SOCKET • TEST POINT



- Available to accept 3 pin sizes: 1, 1.5, & 2mm
- Uses high temperature PCT polyester insulator
- Standard insulator color is black
- For Electrical, Mechanical and Environmental Data, see page 264 for details

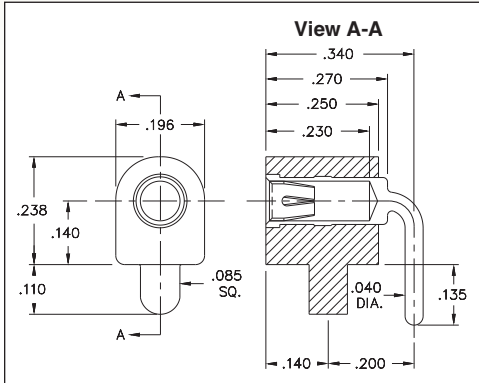

Pin Size	ORDERING INFORMATION						
1.0mm	395-XX-101-34-340000						
1.5mm	395-XX-101-03-380000						
2.0mm	395-XX-101-07-350000						
	RECOMMENDED MOUNTING HOLES Ø.110±.003 DRILLED or PLATED THROUGH-HOLE Ø.045±.003 PLATED THROUGH-HOLE .200 XX=Plating Code See Below RoHS-2 2011/65/EU						
SPECIFY PLATING CODE XX =	13		93				
Sleeve (Pin)	10 μ" Au		200 μ" Sn/Pb				
Contact (Clip)	30 μ" Au		30 μ" Au				

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Mill-Max:

[0395-2-15-80-07-14-10-0](#) [395-13-101-03-380000](#) [395-13-101-34-340000](#) [395-93-101-03-380000](#) [395-93-101-34-340000](#) [395-93-101-07-350000](#) [0395-2-15-15-07-14-10-0](#) [0395-3-15-15-07-14-10-0](#) [0395-4-15-15-07-14-10-0](#) [0395-5-15-15-07-14-10-0](#) [0395-1-15-15-07-14-10-0](#)