
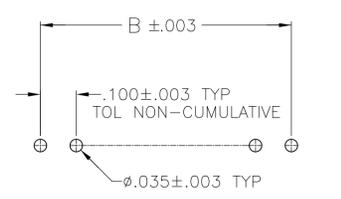
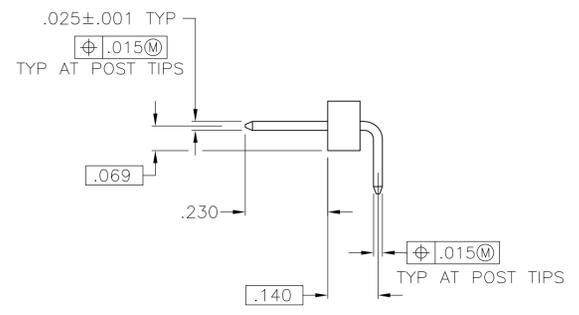
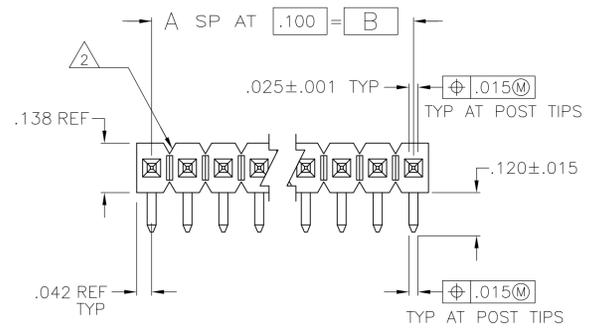


REVISIONS					
P	LTR	DESCRIPTION	DATE	DN	APVD
J5	REVISED PER	ECO-16-010261	12JUL2016	NK	MM

- 1 ASSEMBLIES MAY BE BROKEN TO DESIRED NO OF POSITIONS.
- 2 BREAKAWAY NOTCH ANGLE CAN BE ORIENTED TO THE RIGHT (AS SHOWN) OR TO THE LEFT.
- 3 .000100-.000200 MATTE TIN-LEAD OVER .000050 NICKEL.
- 4 .000100-.000200 BRIGHT TIN OVER .000050 NICKEL.
- 5 PRELIMINARY PART - NOT RELEASED FOR PRODUCTION.
- 6 HOUSING MATERIAL: FLAME RETARDANT THERMOPLASTIC; COLOR-BLACK.
- 7 .000100-.000200 MATTE TIN OVER .000050 NICKEL.
- 8 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

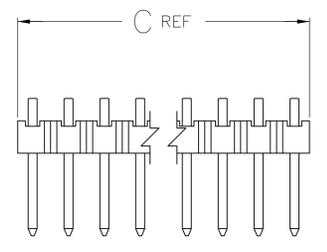

RECOMMENDED HOLE LAYOUT

PLATING	C	B	A	NO OF POSN	PART NUMBER	PLATING	C	B	A	NO OF POSN	PART NUMBER
8						8					
7	3.984	3.900	39	40	-9-103329-0	7	3.984	3.900	39	40	4-103329-2
7	3.884	3.800	38	39	-8-103329-9	4	.984	.900	9	10	4-103329-1
7	3.784	3.700	37	38	-8-103329-8	3	3.984	3.900	39	40	4-103329-0
7	3.684	3.600	36	37	-8-103329-7	3	3.884	3.800	38	39	-3-103329-9
7	3.584	3.500	35	36	-8-103329-6	3	3.784	3.700	37	38	-3-103329-8
7	3.484	3.400	34	35	-8-103329-5	3	3.684	3.600	36	37	-3-103329-7
7	3.384	3.300	33	34	-8-103329-4	3	3.584	3.500	35	36	-3-103329-6
7	3.284	3.200	32	33	-8-103329-3	3	3.484	3.400	34	35	-3-103329-5
7	3.184	3.100	31	32	-8-103329-2	3	3.384	3.300	33	34	-3-103329-4
7	3.084	3.000	30	31	-8-103329-1	3	3.284	3.200	32	33	-3-103329-3
7	2.984	2.900	29	30	-8-103329-0	3	3.184	3.100	31	32	-3-103329-2
7	2.884	2.800	28	29	-7-103329-9	3	3.084	3.000	30	31	-3-103329-1
7	2.784	2.700	27	28	-7-103329-8	3	2.984	2.900	29	30	-3-103329-0
7	2.684	2.600	26	27	-7-103329-7	3	2.884	2.800	28	29	-2-103329-9
7	2.584	2.500	25	26	-7-103329-6	3	2.784	2.700	27	28	-2-103329-8
7	2.484	2.400	24	25	-7-103329-5	3	2.684	2.600	26	27	-2-103329-7
7	2.384	2.300	23	24	-7-103329-4	3	2.584	2.500	25	26	-2-103329-6
7	2.284	2.200	22	23	-7-103329-3	3	2.484	2.400	24	25	-2-103329-5
7	2.184	2.100	21	22	-7-103329-2	3	2.384	2.300	23	24	-2-103329-4
7	2.084	2.000	20	21	-7-103329-1	3	2.284	2.200	22	23	-2-103329-3
7	1.984	1.900	19	20	-7-103329-0	3	2.184	2.100	21	22	-2-103329-2
7	1.884	1.800	18	19	-6-103329-9	3	2.084	2.000	20	21	-2-103329-1
7	1.784	1.700	17	18	-6-103329-8	3	1.984	1.900	19	20	-2-103329-0
7	1.684	1.600	16	17	-6-103329-7	3	1.884	1.800	18	19	-1-103329-9
7	1.584	1.500	15	16	-6-103329-6	3	1.784	1.700	17	18	-1-103329-8
8	OBSOLETE					8	1.684	1.600	16	17	-1-103329-7
7	1.484	1.400	14	15	-6-103329-5	3	1.584	1.500	15	16	-1-103329-6
7	1.384	1.300	13	14	-6-103329-4	3	1.484	1.400	14	15	-1-103329-5
8	OBSOLETE					3	1.384	1.300	13	14	-1-103329-4
7	1.284	1.200	12	13	-6-103329-3	3	1.284	1.200	12	13	-1-103329-3
8	OBSOLETE					3	1.184	1.100	11	12	-1-103329-2
8	OBSOLETE					3	1.084	1.000	10	11	-1-103329-1
8	OBSOLETE					3	.984	.900	9	10	-1-103329-0
8	OBSOLETE					3	.884	.800	8	9	103329-9
7	.884	.800	8	9	-5-103329-9	3	.784	.700	7	8	103329-8
7	.784	.700	7	8	-5-103329-8	3	.684	.600	6	7	103329-7
8	OBSOLETE					3	.584	.500	5	6	103329-6
7	.684	.600	6	7	-5-103329-7	3	.484	.400	4	5	103329-5
7	.584	.500	5	6	-5-103329-6	3	.384	.300	3	4	103329-4
8	OBSOLETE					3	.284	.200	2	3	103329-3
7	.484	.400	4	5	-5-103329-5	3	.184	.100	1	2	103329-2
7	.384	.300	3	4	-5-103329-4	3	.084	-	-	1	103329-1
7	.284	.200	2	3	-5-103329-3	3					
7	.184	.100	1	2	-5-103329-2	3					
8	OBSOLETE					3					

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	±	-
1 PLC	±	-
2 PLC	±	-
3 PLC	±	.005
4 PLC	±	-
ANGLES	±	-

MATERIAL: POST: COPPER ALLOY FINISH: SEE TABLE

APPROVED: J. MARTINELLI 16OCT92, JOHN KNITTLE 23NOV92, B. FLINCHBAUGH 23NOV92

NAME: ASSY, HDR, BREAKAWAY, MODII, SINGLE ROW, .100 C/L, RIGHT ANGLE, WITH .025 SQ POSTS

SIZE: A1, CASE CODE: 00779, DRAWING NO: 103329

WEIGHT: -

CUSTOMER DRAWING

SCALE: 4:1, SHEET: 1 OF 1, REV: J5

STE TE Connectivity

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[4-103329-2](#)