

High-Intensity LED in Plastic T-1³/₄ Package



OVLGx0CyB9 Series

- Narrow beam angle
- High brightness LED
- Water clear plastic package
- UV resistant epoxy





Each device in the **OVLG Series** is a high intensity LED mounted in a clear plastic T-1³/₄ package. Each device incorporates an integral molded lens that enables a narrow beam angle and provides an even emission pattern. Designed to produce light over a wide range of drive currents, these LEDs are useful in applications that require a higher on-axis brightness than that achievable with standard lamps.

Applications

- Indoor/outdoor applications
- Variable message boards
- Store front signage
- Indicators

Part Number	Material	Emitted Color	Intensity Typ. mcd	Lens Color
OVLGB0C6B9	InGaN	Blue	7,200	Clear
OVLGC0C6B9		Blue-Green	23,000	
OVLGS0C8B9	AllnGaP	Red	14,000	
OVLGY0C9B9		Yellow	14,000	

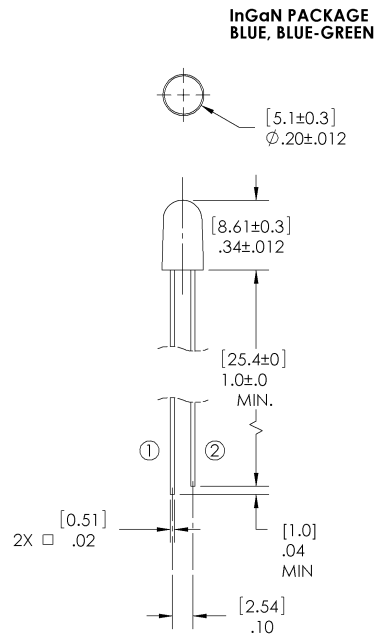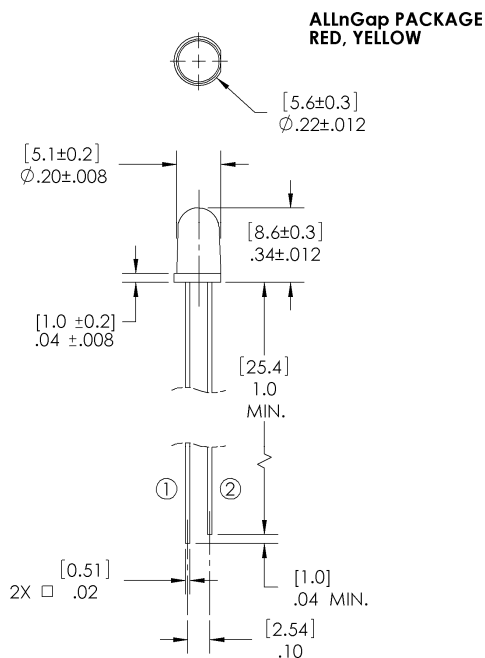

1 ANODE 2 CATHODE
DIMENSIONS ARE IN INCHES [MM]

DO NOT LOOK DIRECTLY AT LED WITH UNSHIELDED EYES OR DAMAGE TO RETINA MAY OCCUR.

OPTEK reserves the right to make changes at any time in order to improve design and to supply the best product possible.

T-1³/₄ High-Intensity LED

OVLG x0CyB9 Series



Absolute Maximum Ratings ($T_A = 25^\circ\text{C}$ unless otherwise noted)

Storage Temperature Range		-40 ~ +100 °C
Operating Temperature Range		-40 ~ +100 °C
Reverse Voltage		5 V
Continuous Forward Current	Blue, Blue-Green	25 mA
	Red, Yellow	50 mA
Peak Forward Current (10% Duty Cycle, 1 kHz)		100 mA
Power Dissipation	Blue, Blue-Green	100 mW
	Red, Yellow	120 mW
Current Linearity vs Ambient Temperature	Blue, Blue-Green	-0.29 mA/°C
	Red, Yellow	-0.72 mA/°C
LED Junction Temperature		125° C
Electrostatic Discharge Classification (JEDEC-JESD22-A114F)		Class 1C
Lead Soldering Temperature (3 mm from the base of the epoxy bulb) ¹		260° C / 5 seconds

Electrical Characteristics ($T_A = 25^\circ\text{C}$ unless otherwise noted)

SYMBOL	PARAMETER	COLOR	MIN	TYP	MAX	UNITS	CONDITIONS
I_V	Luminous Intensity	Blue	4,360	7,200	----	mcd	$I_F = 20\text{ mA}$
		Blue-Green	11,970	23,000	----		
		Red	8,550	14,000	----		
		Yellow	8,550	14,000	----		
V_F	Forward Voltage	Blue	2.6	3.2	4.0	V	$I_F = 20\text{ mA}$
		Blue-Green					
		Red	1.8	2.0	2.4		
		Yellow					
I_R	Reverse Current	Blue	----	----	10	μA	$V_R = 5\text{ V}$
		Blue-Green					
		Red					
		Yellow					
λ_D	Dominant Wavelength	Blue	460	470	475	nm	$I_F = 20\text{ mA}$
		Blue-Green	499	505	511		
		Red	620	623	630		
		Yellow	585	589	595		
2Θ _{1/2} H-H	50% Power Angle		----	8	----	deg	$I_F = 20\text{ mA}$

OPTEK reserves the right to make changes at any time in order to improve design and to supply the best product possible.

T-1³/₄ High-Intensity LED

OVLG x0CyB9 Series



Standard Bins

LEDs are sorted to luminous intensity (I_V), forward voltage (V_F), and dominant wavelength (λ_D) bins shown. Each bag will consist of a single intensity bin, single forward voltage bin and single dominant wavelength bin. Orders may be filled with any of the intensity bins or color bins listed in the following tables. Optek will not accept orders for single intensity bins or single color bins.

Luminous Intensity (I_V) @ 20mA

Blue: OVLGB0C6B9		
IV Code	Min (mlm)	Max (mlm)
0W	4,360	6,105
0X	6,105	8,550
0Y	8,550	11,970
0Z	11,970	16,758
Blue-Green: OVLGC0C6B9		
IV Code	Min (mlm)	Max (mlm)
0Z	11,970	16,758
Z1	16,758	23,500
Z2	23,500	32,800
Z3	32,800	46,000

Forward Voltage (V_F) @ 20mA

Blue: OVLGB0C6B9 & Blue-Green: OVLGC0C6B9		
VF Code	Min (V)	Max (V)
A	2.6	2.8
B	2.8	3.0
C	3.0	3.2
D	3.2	3.4
E	3.4	3.6
F	3.6	3.8
G	3.8	4.0

Dominant Wavelength (nm)

Blue: OVLGB0C6B9		
nm Code	Min (nm)	Max (nm)
BC	460	465
BD	465	470
BE	470	475
Green: OVLGC0C6B9		
nm Code	Min (nm)	Max (nm)
HB	499	502
HC	502	505
HD	505	508
HE	508	511

Luminous Intensity (I_V) @ 20mA

Red: OVLGS0C8B9		
IV Code	Min (mlm)	Max (mlm)
0Y	8,550	11,970
0Z	11,970	16,758
Z1	16,758	23,500
Z2	23,500	32,800
Yellow: OVLGY0C9B9		
IV Code	Min (mlm)	Max (mlm)
0Y	8,550	11,970
0Z	11,970	16,758
Z1	16,758	23,500
Z2	23,500	32,800

Forward Voltage (V_F) @ 20mA




Red: OVLGS0C8B9 & Yellow: OVLGY0C9B9		
VF Code	Min (V)	Max (V)
A	1.8	2.0
B	2.0	2.2
C	2.2	2.4

Dominant Wavelength (nm)

Red: OVLGS0C8B9		
nm Code	Min (nm)	Max (nm)
RA	620	625
RB	625	630
Yellow: OVLGY0C9B9		
nm Code	Min (nm)	Max (nm)
YC	585	587
YD	587	589
YE	589	591
YF	591	593
YG	593	595

OPTEK reserves the right to make changes at any time in order to improve design and to supply the best product possible.

Typical Electro-Optical Characteristics Curves—Blue & Blue-Green

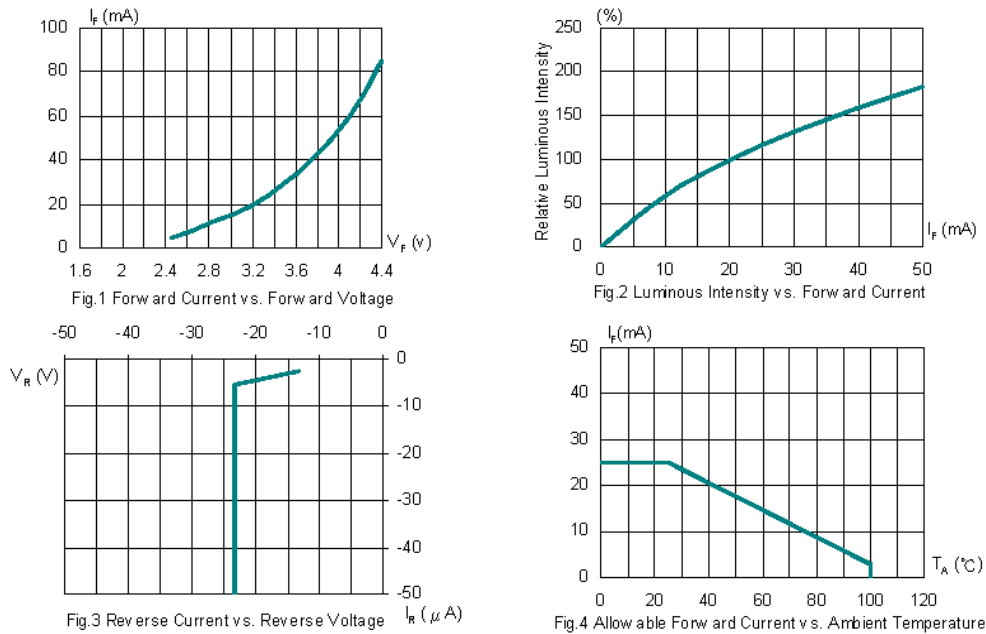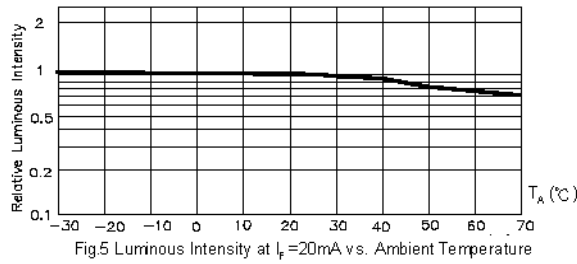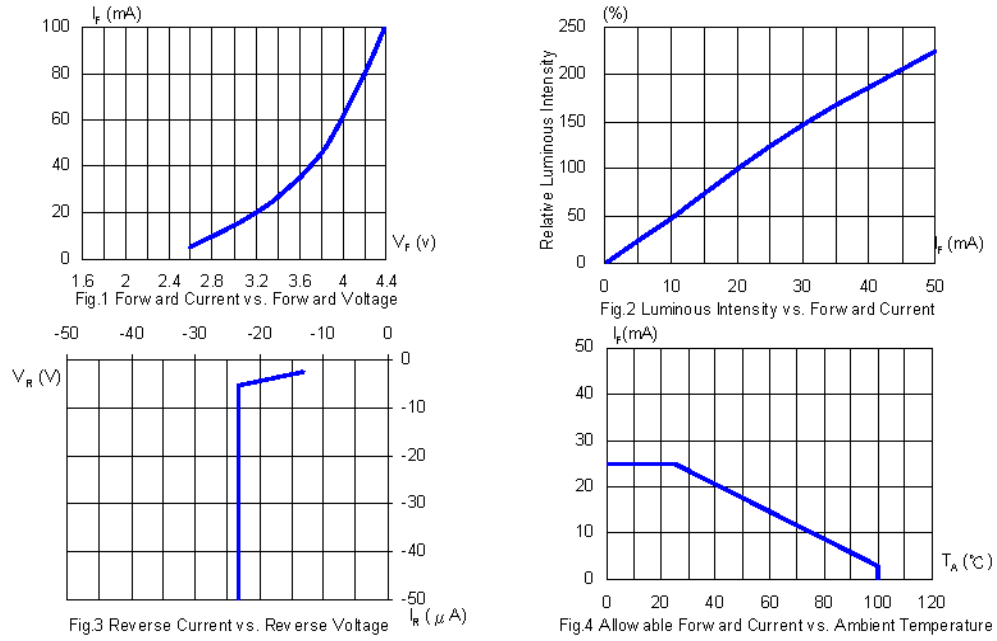

OPTeK reserves the right to make changes at any time in order to improve design and to supply the best product possible.

Typical Electro-Optical Characteristics Curves—Red & Yellow

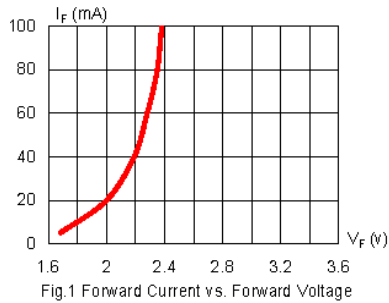


Fig.1 Forward Current vs. Forward Voltage

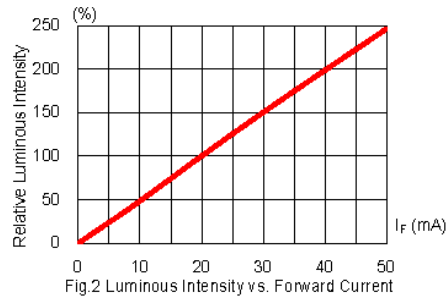


Fig.2 Luminous Intensity vs. Forward Current

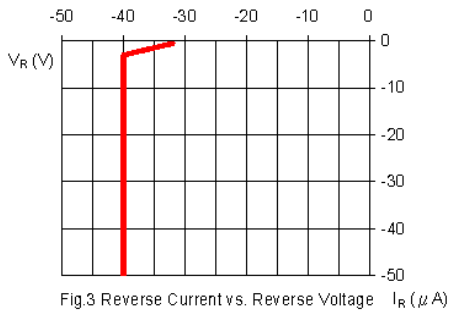


Fig.3 Reverse Current vs. Reverse Voltage

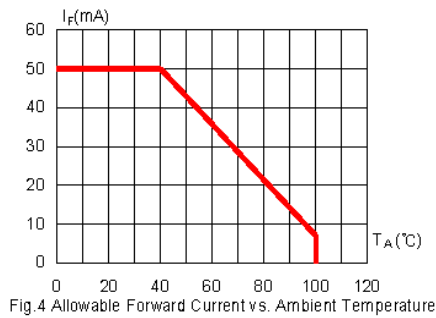


Fig.4 Allowable Forward Current vs. Ambient Temperature

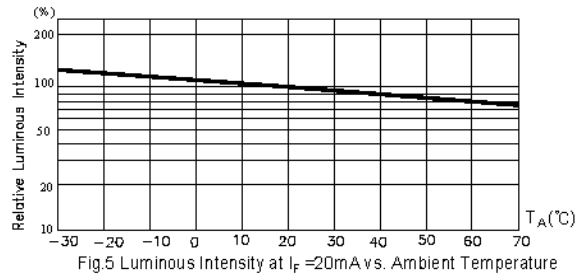


Fig.5 Luminous Intensity at $I_F = 20mA$ vs. Ambient Temperature

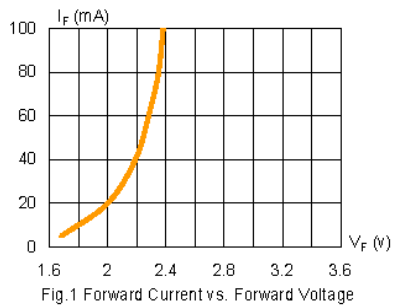


Fig.1 Forward Current vs. Forward Voltage

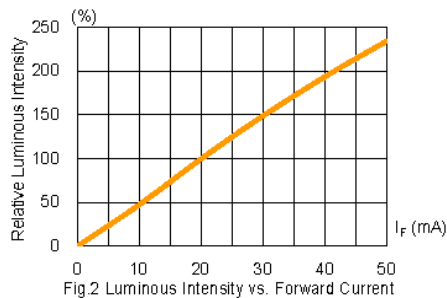


Fig.2 Luminous Intensity vs. Forward Current

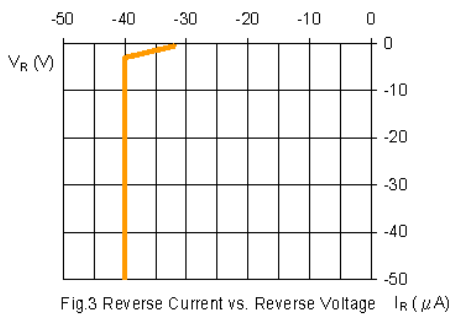


Fig.3 Reverse Current vs. Reverse Voltage

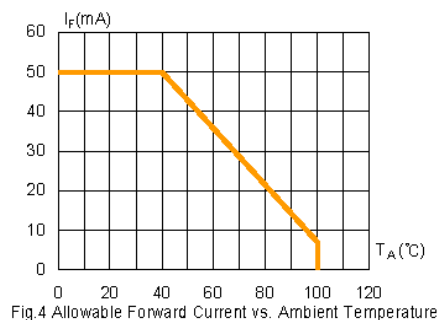



Fig.4 Allowable Forward Current vs. Ambient Temperature

OPTeK reserves the right to make changes at any time in order to improve design and to supply the best product possible.


T-1³/₄ High-Intensity LED

OVLG x0CyB9 Series

Beam Angle:

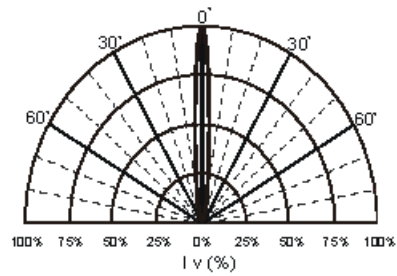

Packaging: 500 pcs per anti-static bag with desiccant

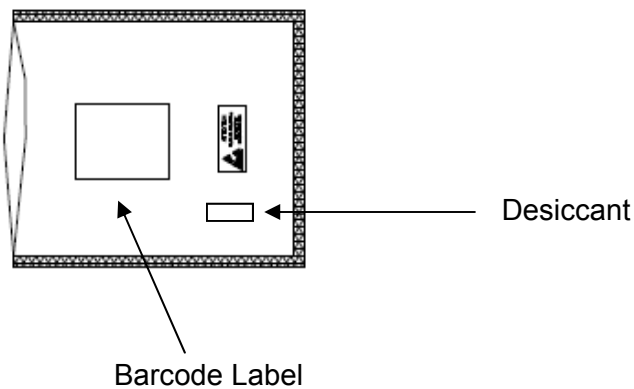

OPTEK reserves the right to make changes at any time in order to improve design and to supply the best product possible.

Reliability Test

LED lamps are checked by reliability tests based on MIL standards.

1. Test Conditions, Acceptable Criteria & Results

Classification	Test Item	Std. Test Method	Test Conditions	Duration	Unit	Acc / Rej Criteria	Result
Life Test	Operation Life Test (OLT)	MIL-STD-750D Method 1026.3	T _A =25°C , I _F =30mA *	1000 Hrs	100	0 / 1	Pass
Environmental Test	High Temperature Storage (HTS)	MIL-STD-750D Method 1032.1	T _A =100°C	1000 Hrs	100	0 / 1	Pass
	Low Temperature Storage (LTS)	MIL-STD-750D Method 1032.1	T _A =-40°C	1000 Hrs	100	0 / 1	Pass
	Temp. & Humidity with Bias (THB)	MIL-STD-750D Method 103B	T _A =85°C , Rh=85% I _F =20mA	500 Hrs	100	0 / 1	Pass
	Thermal Shock Test (TST)	MIL-STD-750D Method 1056.1	0°C ~ 100°C 2min 2min	100 cycles	100	0 / 1	Pass
	Temperature Cycling Test (TCT)	MIL-STD-750D Method 1051.5	-40°C ~ 25°C ~ 100°C ~ 25°C 30min 5min 30min 5min	100 cycles	100	0 / 1	Pass
Mechanical Test	Solderability	MIL-STD-750D Method 2026.4	235±5°C , 5 sec.	1 time	20	0 / 1	Pass
	Resistance to Soldering Heat	MIL-STD-750D Method 2031.1	260±5°C , 5 sec.	1 time	20	0 / 1	Pass
	Lead Integrity	MIL-STD-750D Method 2036.3	Load 2.5N (0.25kgf) 0°~90°~0° , bend	3 times	20	0 / 1	Pass

Remark: (*) I_F = 30mA for AllnGaP chip; I_F = 20mA for InGan chip
 (**) I_F = 20mA for AllnGaP chip; I_F = 10mA for InGan chip

2. Failure Criteria (T_A = 25°C):

Test Item	Symbol	Test Conditions	Criteria for Judgment	
			Min.	Max
Luminous Intensity	I _V	I _F = 20mA	LSLx0.7 **	
Forward Voltage	V _F	I _F = 20mA		USLx1.1 *

(*) USL: Upper Standard Level, (**) LSL: Lower Standard Level

OPTEK reserves the right to make changes at any time in order to improve design and to supply the best product possible.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TT Electronics:](#)

[OVLGS0C8B9](#) [OVLGO0C8B9](#) [OVLGY0C9B9](#) [OVLGC0C6B9](#) [OVLGG0C5B9](#) [OVLGB0C6B9](#)