



8 7 6 5 4 3 2 1

NOTES:
1. ROHS COMPLIANT
2. MATERIAL: HOUSING - NYLON 6/6, U.L. 94-V0 RATING, BLACK (UNLESS OTHERWISE SPECIFIED)
CONTACTS - PHOSPHER BRONZE, TIN PLATED
3. MOUNTING: SOCKET MOUNTS ON .250" [6.35mm] CENTERS. INSERT COMPONENT LEADS THRU
THE MOUNTING PAD END OF SOCKET
4. OPTO: STANDARD VISIBLE, IR LED, OR PHOTO DETECTOR WITH LEADS ON .100" [.25mm] CENTERS
5. LED LEAD DIMENSIONS: MINIMUM .017" [.43mm] ROUND OR SQUARE SHAPE. MAXIMUM .030" [.76mm]
THICKNESS - .040" [1.02mm] WIDTH
6. U.S. & FOREIGN PATENTS ISSUED




REVISIONS					
ECN #	REV.	DESCRIPTION	DATE	INITIALS	CHK'D
	001	REVISED PER ECR 111009AZ01	6/20/10	SMU	DZ
426	002	REVISED PER ECR 041212KH02	4/13/12	KH	ED




SMD PAD PATTERN



DETAIL B
SCALE 10 : 1

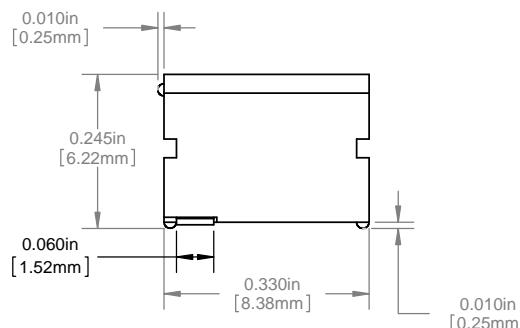

SECTION A-A



ORDERING CODE : SMD 330

DIMENSION STYLE: INCHES [MM]		APPROVAL	DATE
GENERAL TOLERANCES UNLESS OTHERWISE SPECIFIED	INCHES [MM]	DRAWN	SMU
X	± 020	± .508	6/20/10
XX	± 010	± .254	
XXX	± 005	± .127	
ANGLE: ± 1°			
BREAK: ALLOW 10% LEAD LENGTH			
ALL DIMENSIONS AND SHAPES ARE IN INCHES			
THIRD ANGLE PROJECTION			

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE PROPERTY OF VISUAL COMMUNICATIONS COMPANY, INC. AND IS TO BE KEPT CONFIDENTIAL. IT IS TO BE USED ONLY FOR THE PURCHASE OF A WHOLE WITHOUT THE WRITTEN PERMISSION OF VISUAL COMMUNICATIONS COMPANY, INC. IS PROHIBITED.

MATERIAL
SEE NOTES

FINISH
SEE NOTES

DO NOT SCALE DRAWING

VCC
12780 DANIELSON CT, SUITE A, POWAY, CA 92064 U.S.A.
PHONE: (800) 522-5546 EMAIL: vccsales@vccelite.com

TITLE:
P-C-LITE® HORIZONTAL
MOUNT

SIZE DWG. NO. REV
B SMD 330 002

SCALE: 5:1 SHEET 1 OF 1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[VCC](#):

[SMD330 \(BULK\)](#)