


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

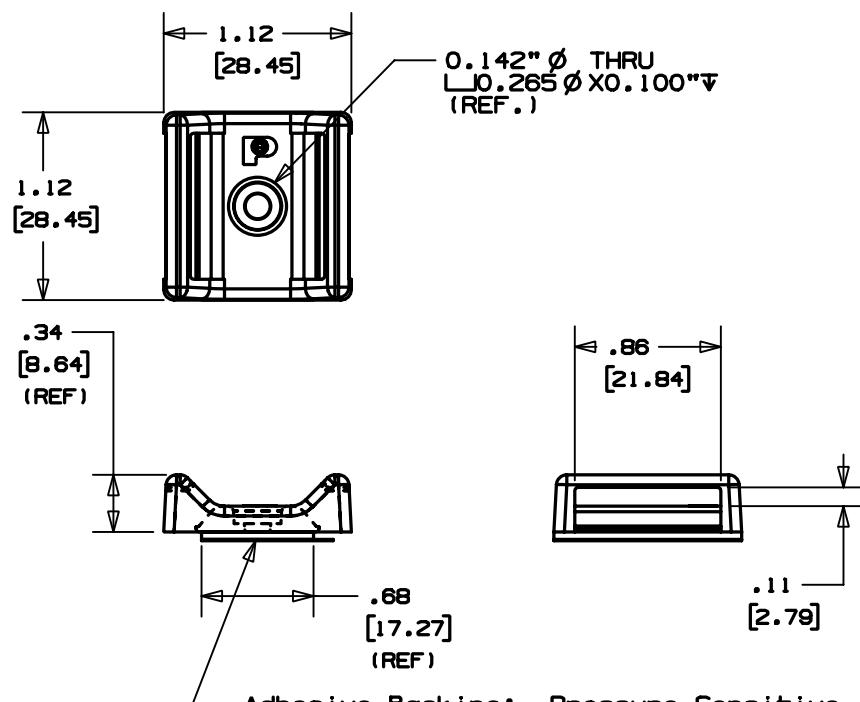


Adhesive Backing: Pressure Sensitive Adhesive Foam Tape 0.04" (1.0mm) thick with a protective liner. Mount is designed to support 0.38 lbs. (173.5g) max weight on a clean, dry, smooth, grease free surface.

NOTES:

1. SEE CURRENT PRICE SHEET FOR PART NUMBER SUFFIX DESIGNATION FOR PACKAGE SIZE AND COLOR.
2. -A SUFFIX REPRESENTS RUBBER ADHESIVE
-AT SUFFIX REPRESENTS ACRYLIC ADHESIVE
-S6 SUFFIX, NO ADHESIVE: SCREW APPLIED WITH A #6-32 BUTTON HEAD CAP SCREW.
3. ABMT-A HAS A MAXIMUM CONTINUOUS OPERATING TEMPERATURE OF 120°F (49°C).
ABMT-AT HAS A MAXIMUM CONTINUOUS OPERATING TEMPERATURE OF 180°F (82°C).

| | | | | | | | | | | |
|-----|---------|-----|-----|---------------|----------|------|-----|--|-------|--------------|
| 1 | 2/11/05 | JAD | | 1.12 was 1.10 | GB2471CB | 1 | | | | DATE 1/28/02 |
| REV | DATE | BY | CHK | DESCRIPTION | ECN - R | CUST | SUP | | CRK'D | |

| PANDUIT PART NO. (*) | WEIGHT lbs / 100 (g) / pcs. |
|-------------------------|-----------------------------------|
| ABMT---- | NO ADHESIVE 0.64 (291.4) |
| | WITH ADHESIVE 0.65 (294.8) |

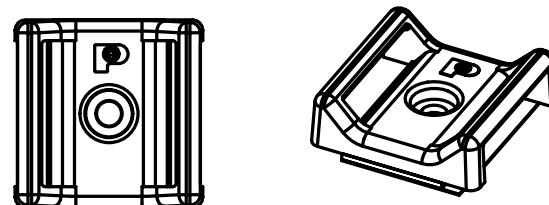

SCALE: FULL

DIMENSIONS IN BRACKETS ARE METRIC [mm]

CAD FILENAME/LAYER: GB2471CB_PB_ABMT_01

PANDUIT CORP. TINLEY PARK, ILLINOIS

ADHESIVE BACKED "TAK-TY" MOUNT
(ABMT-___)

| | |
|--|---|
| UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: (.X) ± 0.05 [1.31] (.XXX) ± 0.010 [0.25] (.XX) ± 0.02 [0.51] ANGLES $\pm 5^\circ$ | UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES. THIRD ANGLE PROJECTION. |
| DRAWN BY JAD | MAT'L: NYLON 6/6 |
| SCALE NONE | DRAWING NO. GB2471CB |

SIZE A

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Panduit:

[ABMT-A-Q](#) [ABMT-S6-Q20](#)