


- NOTES:
- 1

BARREL TERMINALS WILL ACCEPT ONE OR TWO WIRES OF THE SAME SIZE PER TERMINAL. MAXIMUM WIRE-SIZE IS 22 AWG [0,35mm²] WITH 1,2mm DIA. INSULATION. MINIMUM WIRE-SIZE IS 26AWG [0,12mm²] WITH 0,7mm DIA. INSULATION.
- 2

STUFFER-CAP IS SHIPPED NOT ASSEMBLED.
- 3

TOLERANCES ON ALL DIMENSIONS: ±0,1 UNLESS SPECIFIED OTHERWISE.

RESTRICTED TO L.K., DENMARK

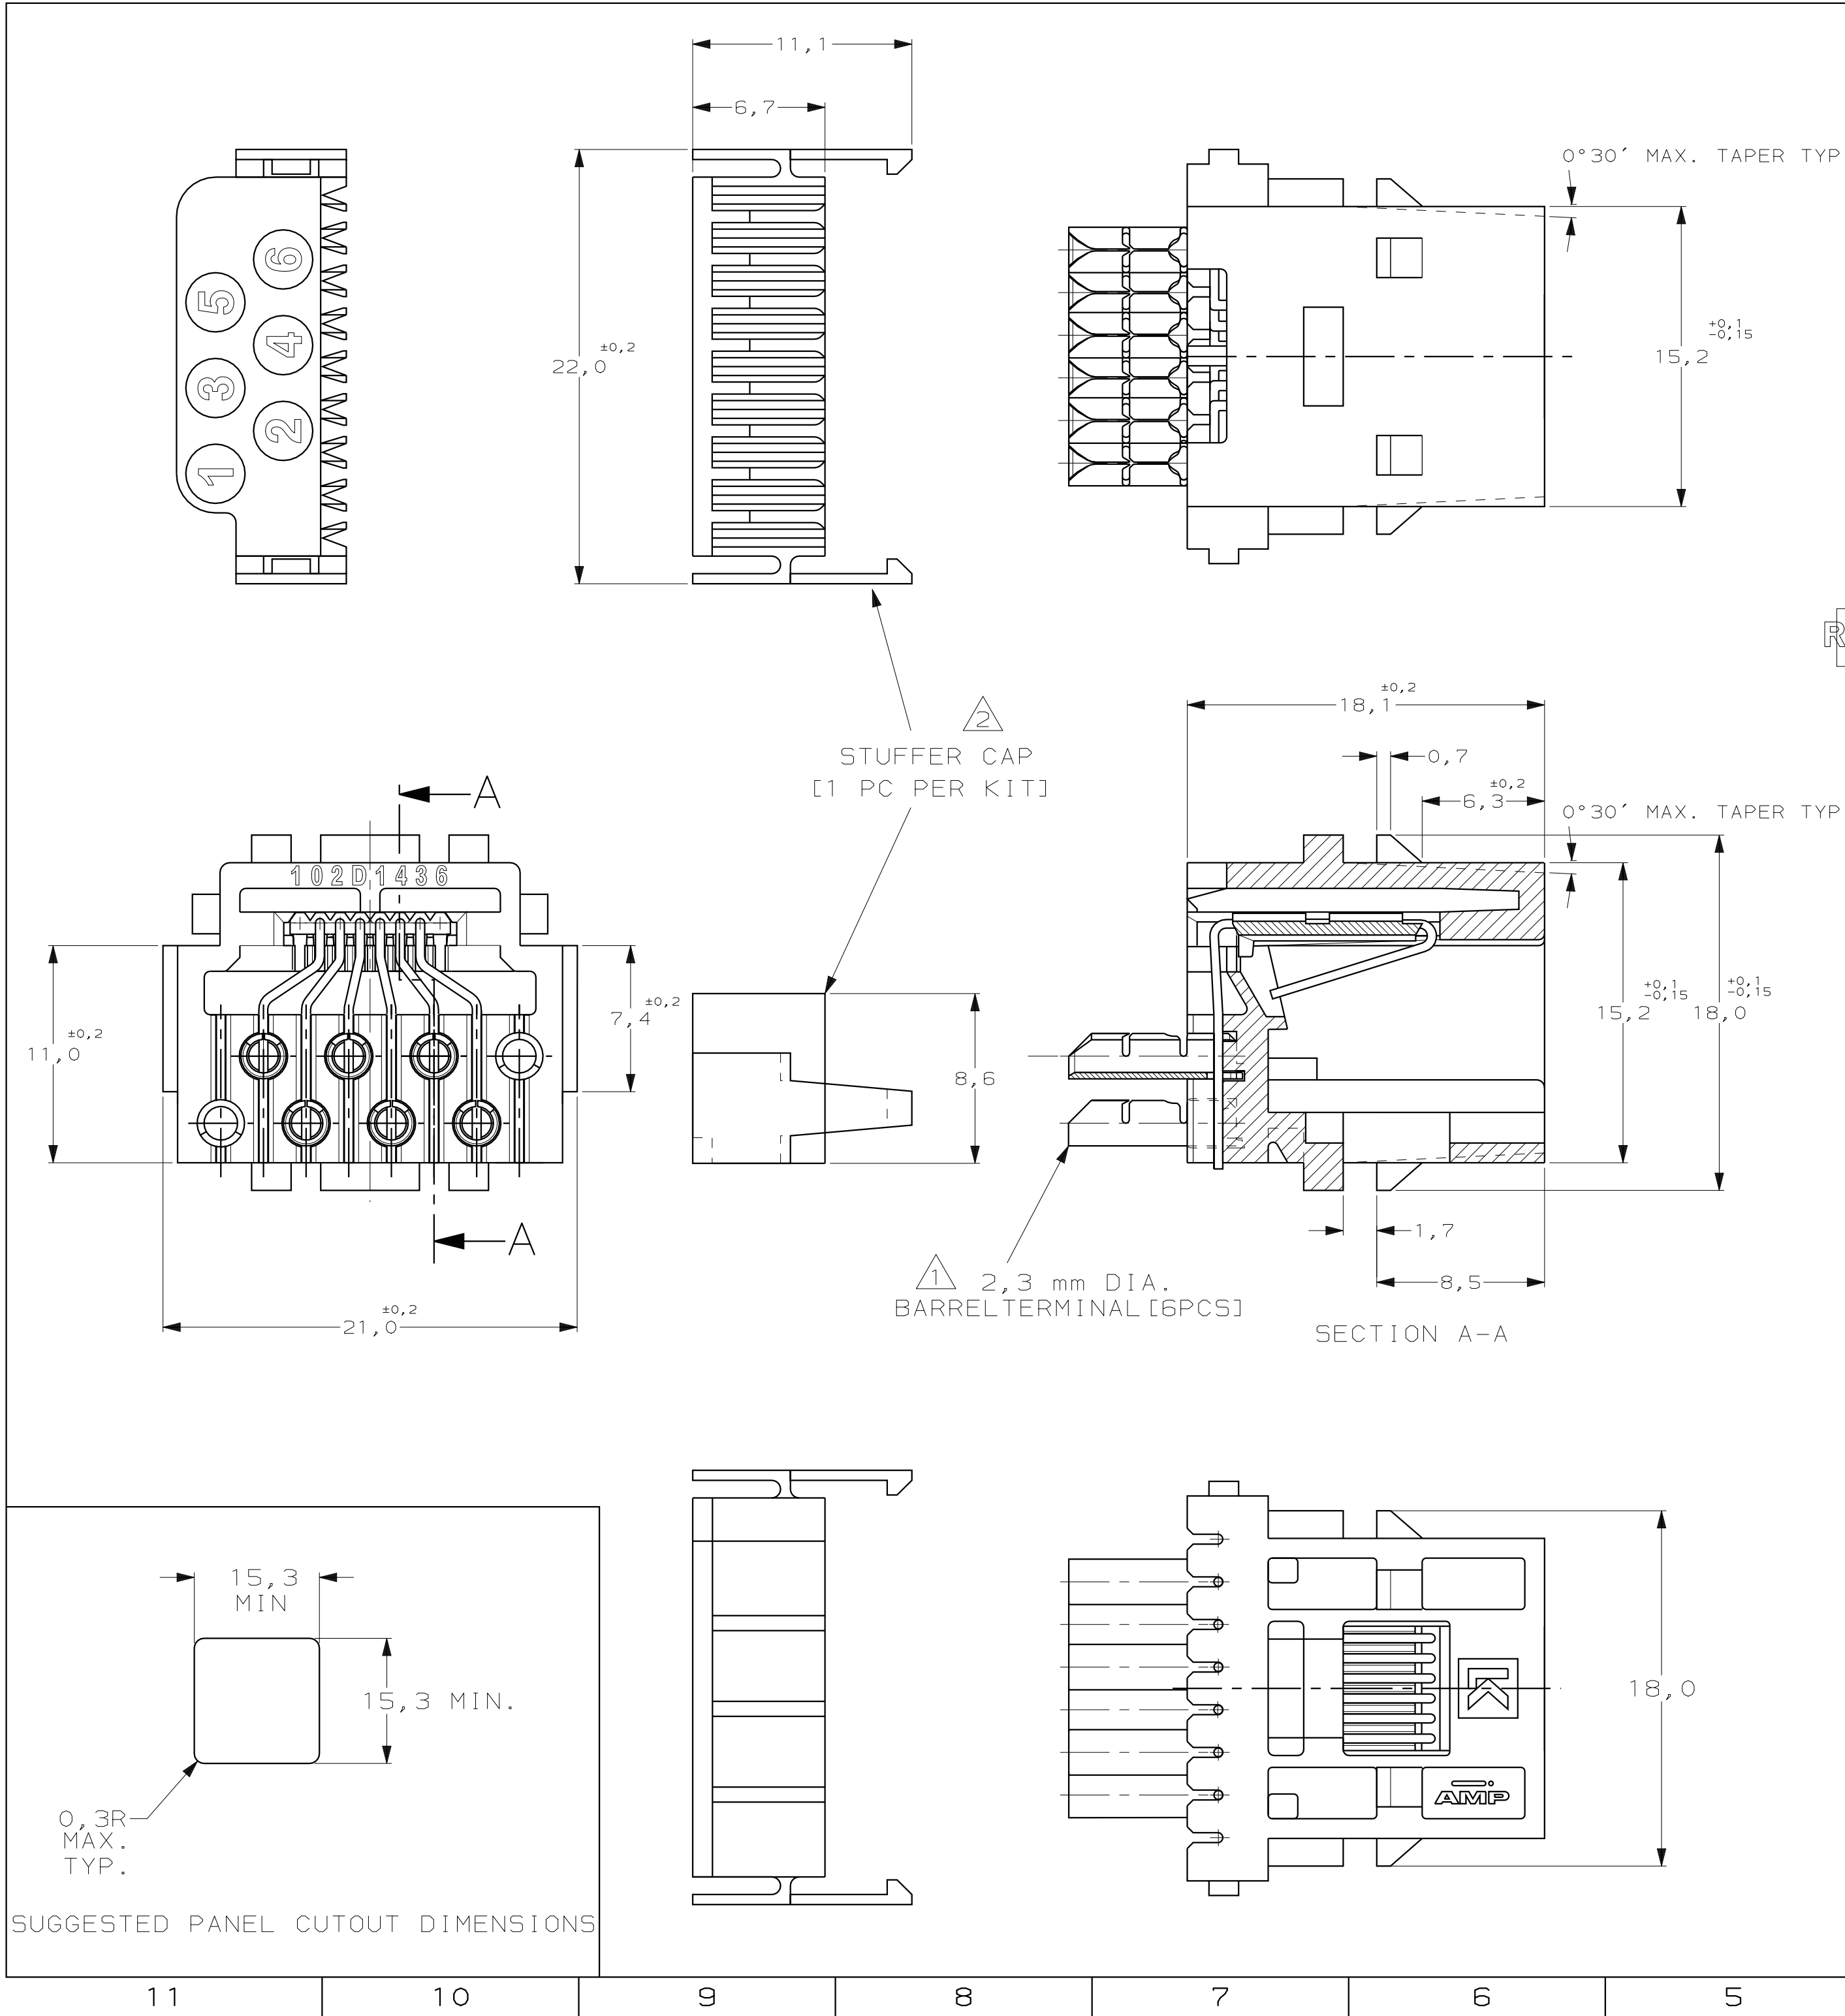

STUFFER CAP : POLYCARBONATE, NATUREL BARREL TERMINALS : PHOS.BRONZE PRE-TINPLATED CONTACTS : PHOS.BRONZE, PLATED 1,25µm SELECTIVE GOLD OVER 1,25µm NICKEL HOUSING : PBT, COLOR: GREY [RAL7037 UL94-HB]				2-216022-1	
MATERIALS				PARTNUMBER	
CUSTOMER DRAWING		AMP		AMP-HOLLAND B.V. 's-Hertogenbosch, The Netherlands.	
FOR REFERENCE ONLY WILL NOT BE UPDATED		THIS DRAWING IS UNPUBLISHED © COPYRIGHT 19- BY AMP-HOLLAND B.V. ALL INTERNATIONAL RIGHTS RESERVED. AMP PRODUCTS MAY BE COVERED BY U.S. AND FOREIGN PATENTS AND/OR PATENTS PENDING.		RELEASED FOR PUBLICATION , 19	
DR. P.BEIJNON	DATE 08-02-90	WIRE RANGE NOTE 1	NAME TOOLLESS MODULAR JACK KIT, 6P05, FOR DISCRETE WIRES		REV. DATE D M Y 08 02 90
CHK. D.CAMPSCHROER	DATE -	INSUL. RANGE NOTE 1			
APP. L. VAN SOEST	DATE -	SIZE A2	SHEET 1 OF 1	DWG. No. 216022	REV. LTR. F

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[2-216022-1](#)