


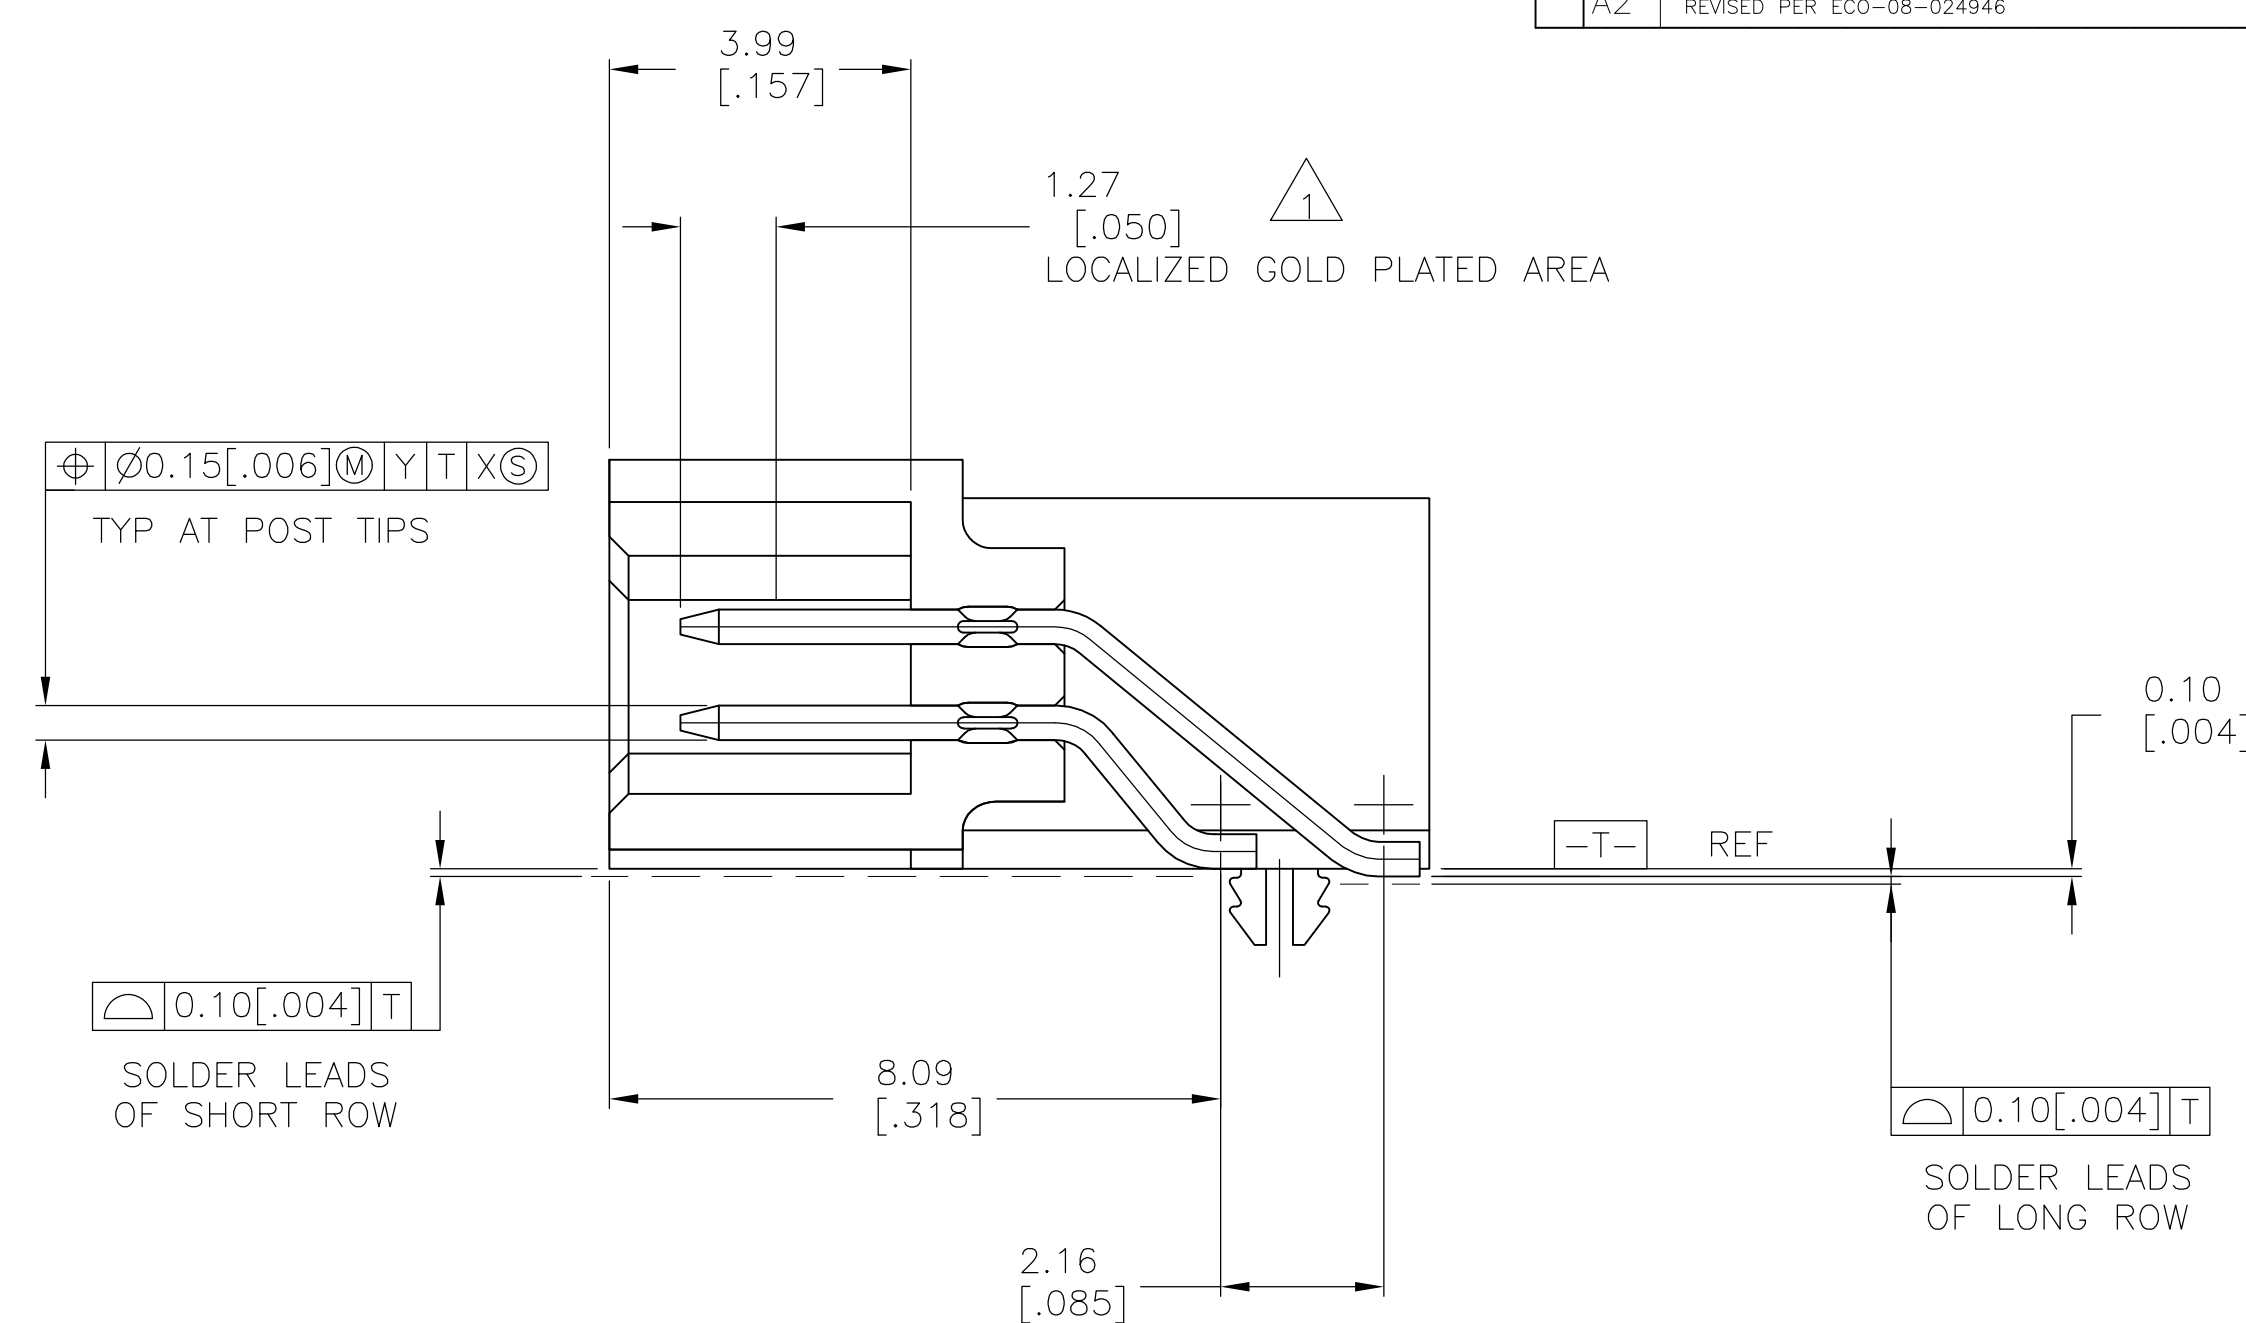

1 0.00076 [.000030] GOLD IN LOCALIZED PLATE AREA
0.00381 [.000150] TIN-LEAD ON SOLDER LEADS
ALL OVER 0.00127 [.000050] NICKEL



2 USE 1.32±0.02 [.0520±.0010] DRILLED HOLE (#55 DRILL)
FINISH TO BE TIN-LEAD OVER 0.02 [.001] MIN COPPER

3 PLATING: 0.0038 [.000150] TIN-LEAD OVER 0.00127 [.000050] NICKEL

4 SERRATIONS OPTIONAL THIS SURFACE.

6 PLATING: 0.0038 (.00015) TIN OVER .00127 (.000050) NICKEL.

7 USE 1.32+/-0.02 (.052+/-0.001) DRILLED HOLE (#55 DRILL)
FINISH TO BE TIN OVER 0.02 (.001) MIN COPPER

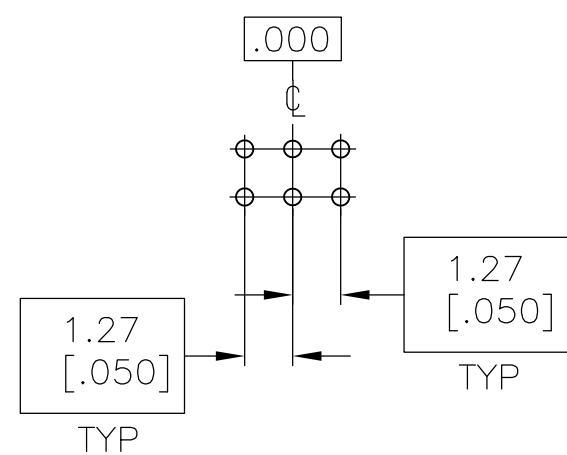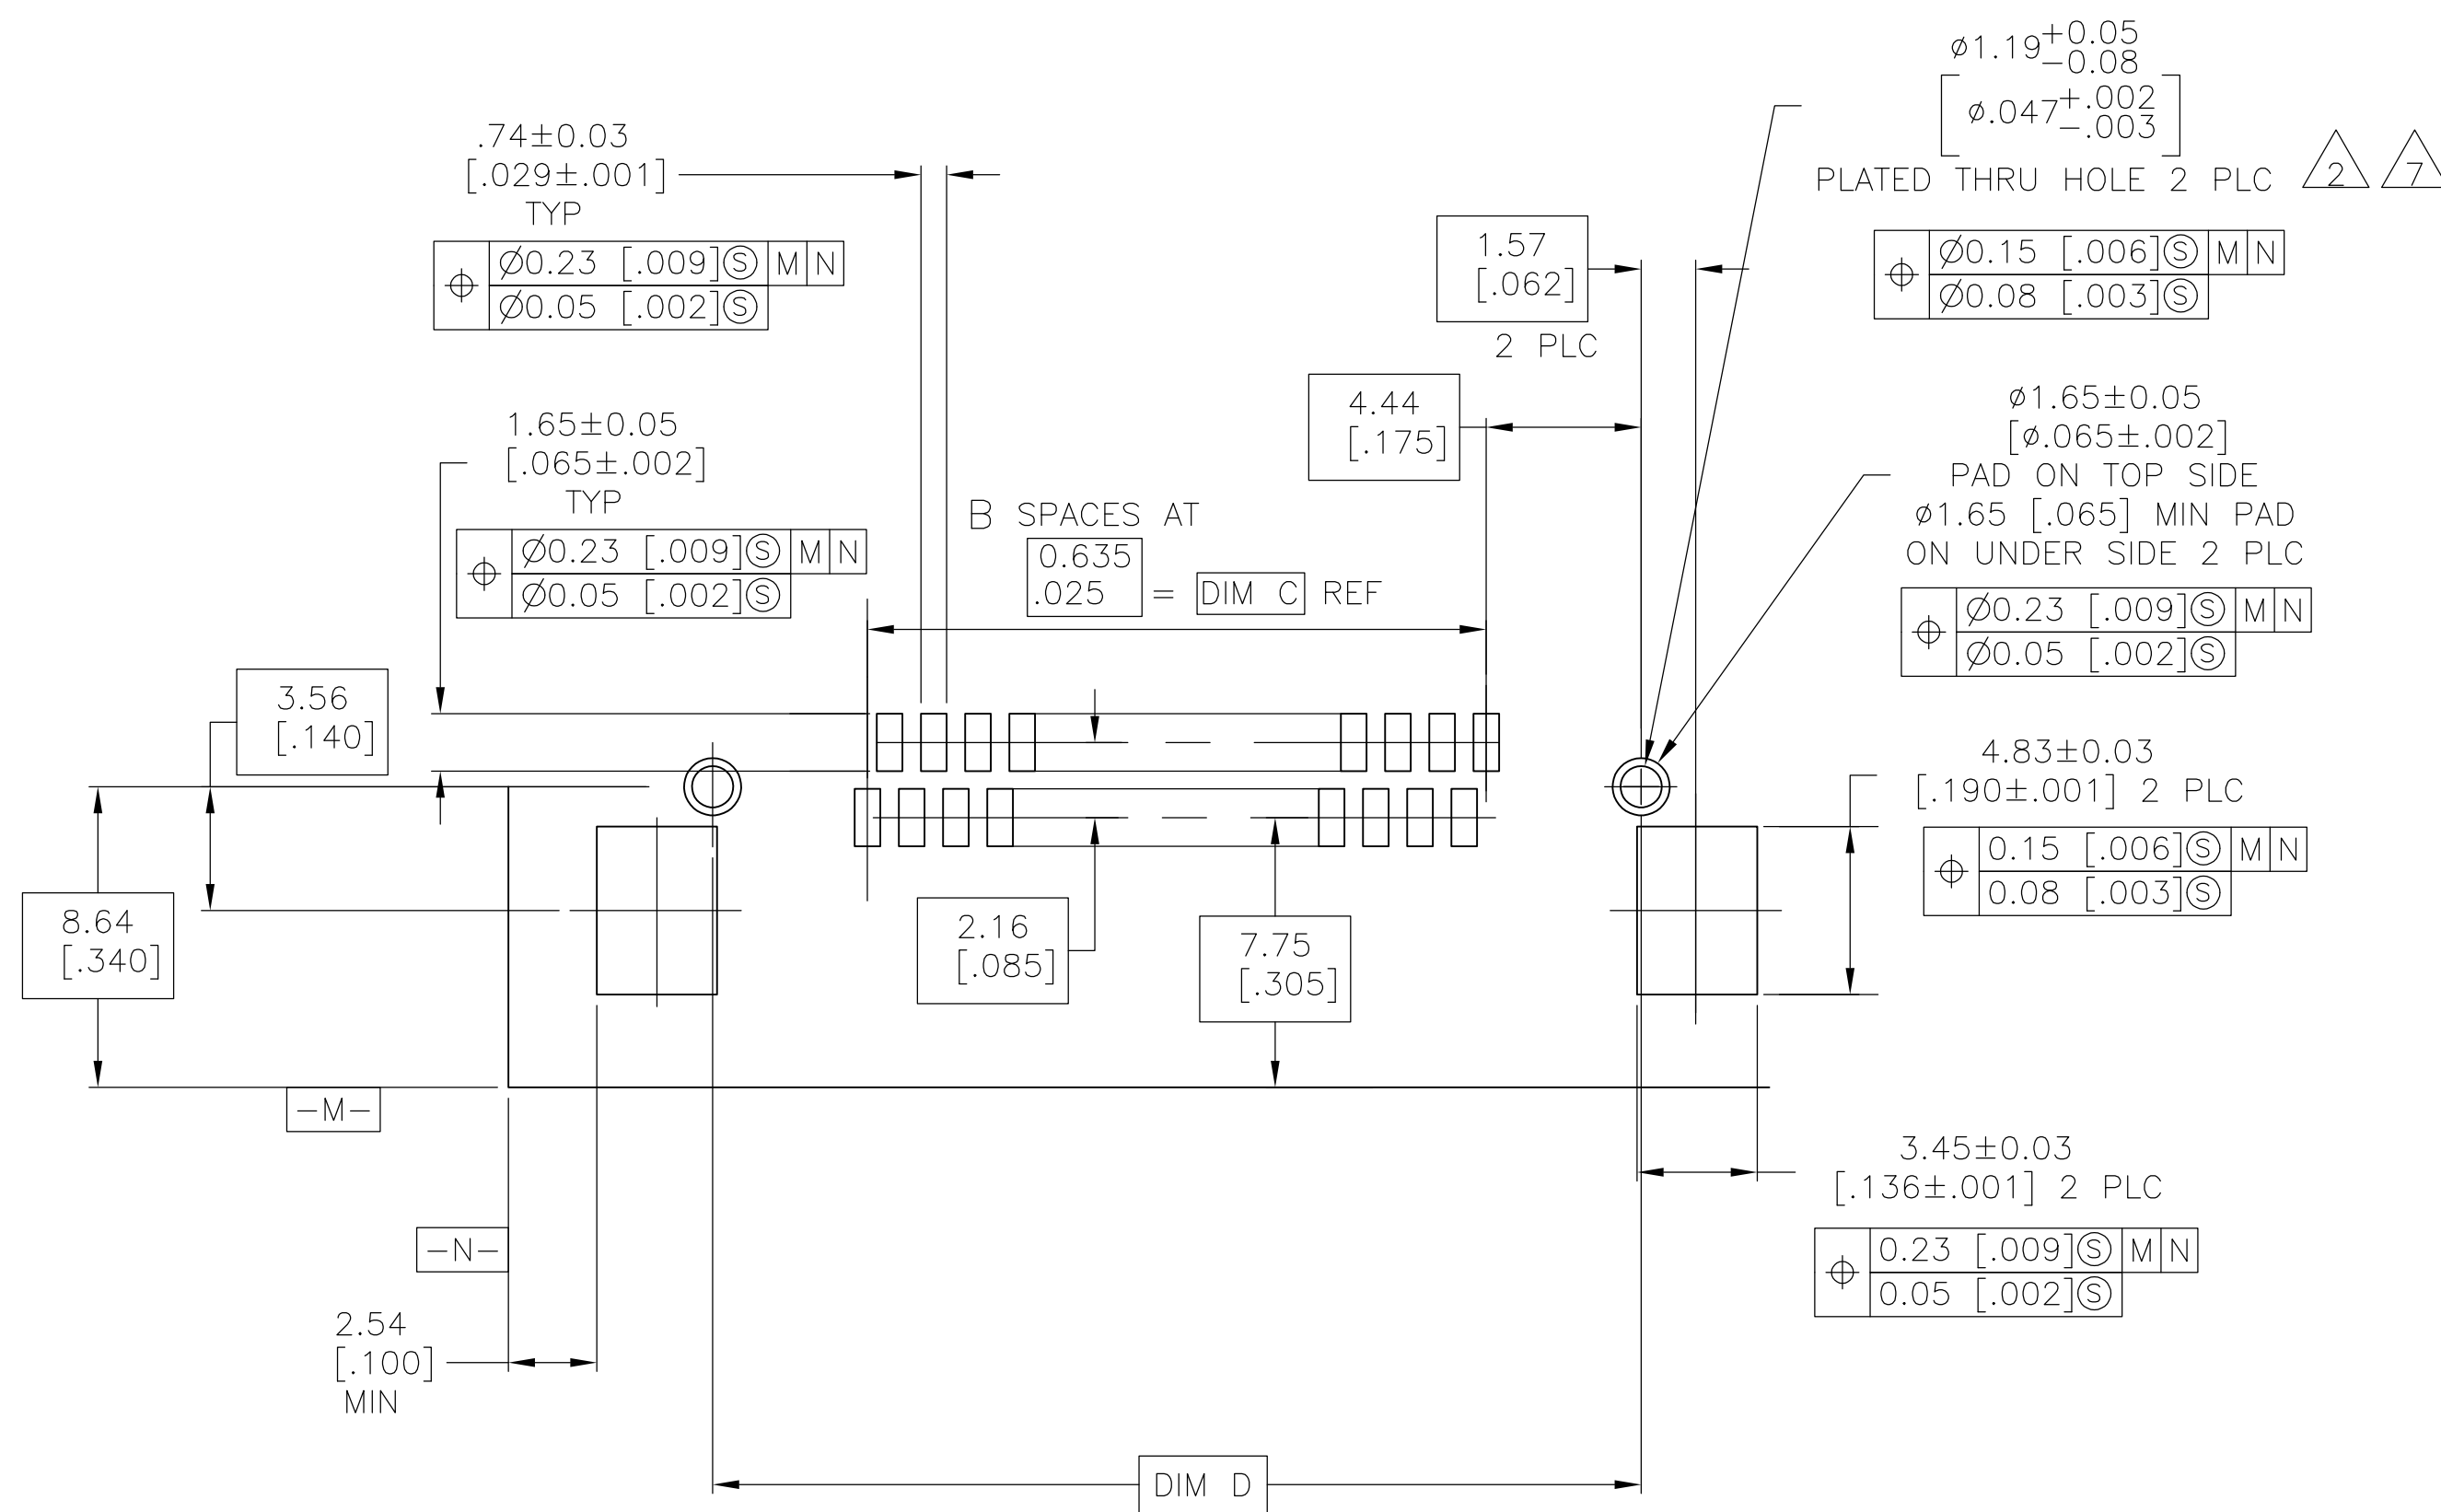

DETAIL R

AMP 4805 REV 31MAR2000

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1977276-1](#)