

LOC	DIST	REVISIONS			
AD	00	P	LTR	DESCRIPTION	DATE
		M		REVISED PER ECO-14-000068	23APR2014
			DWN	APVD	
			NK	MM	

D

C

B


A

D

C

B

A

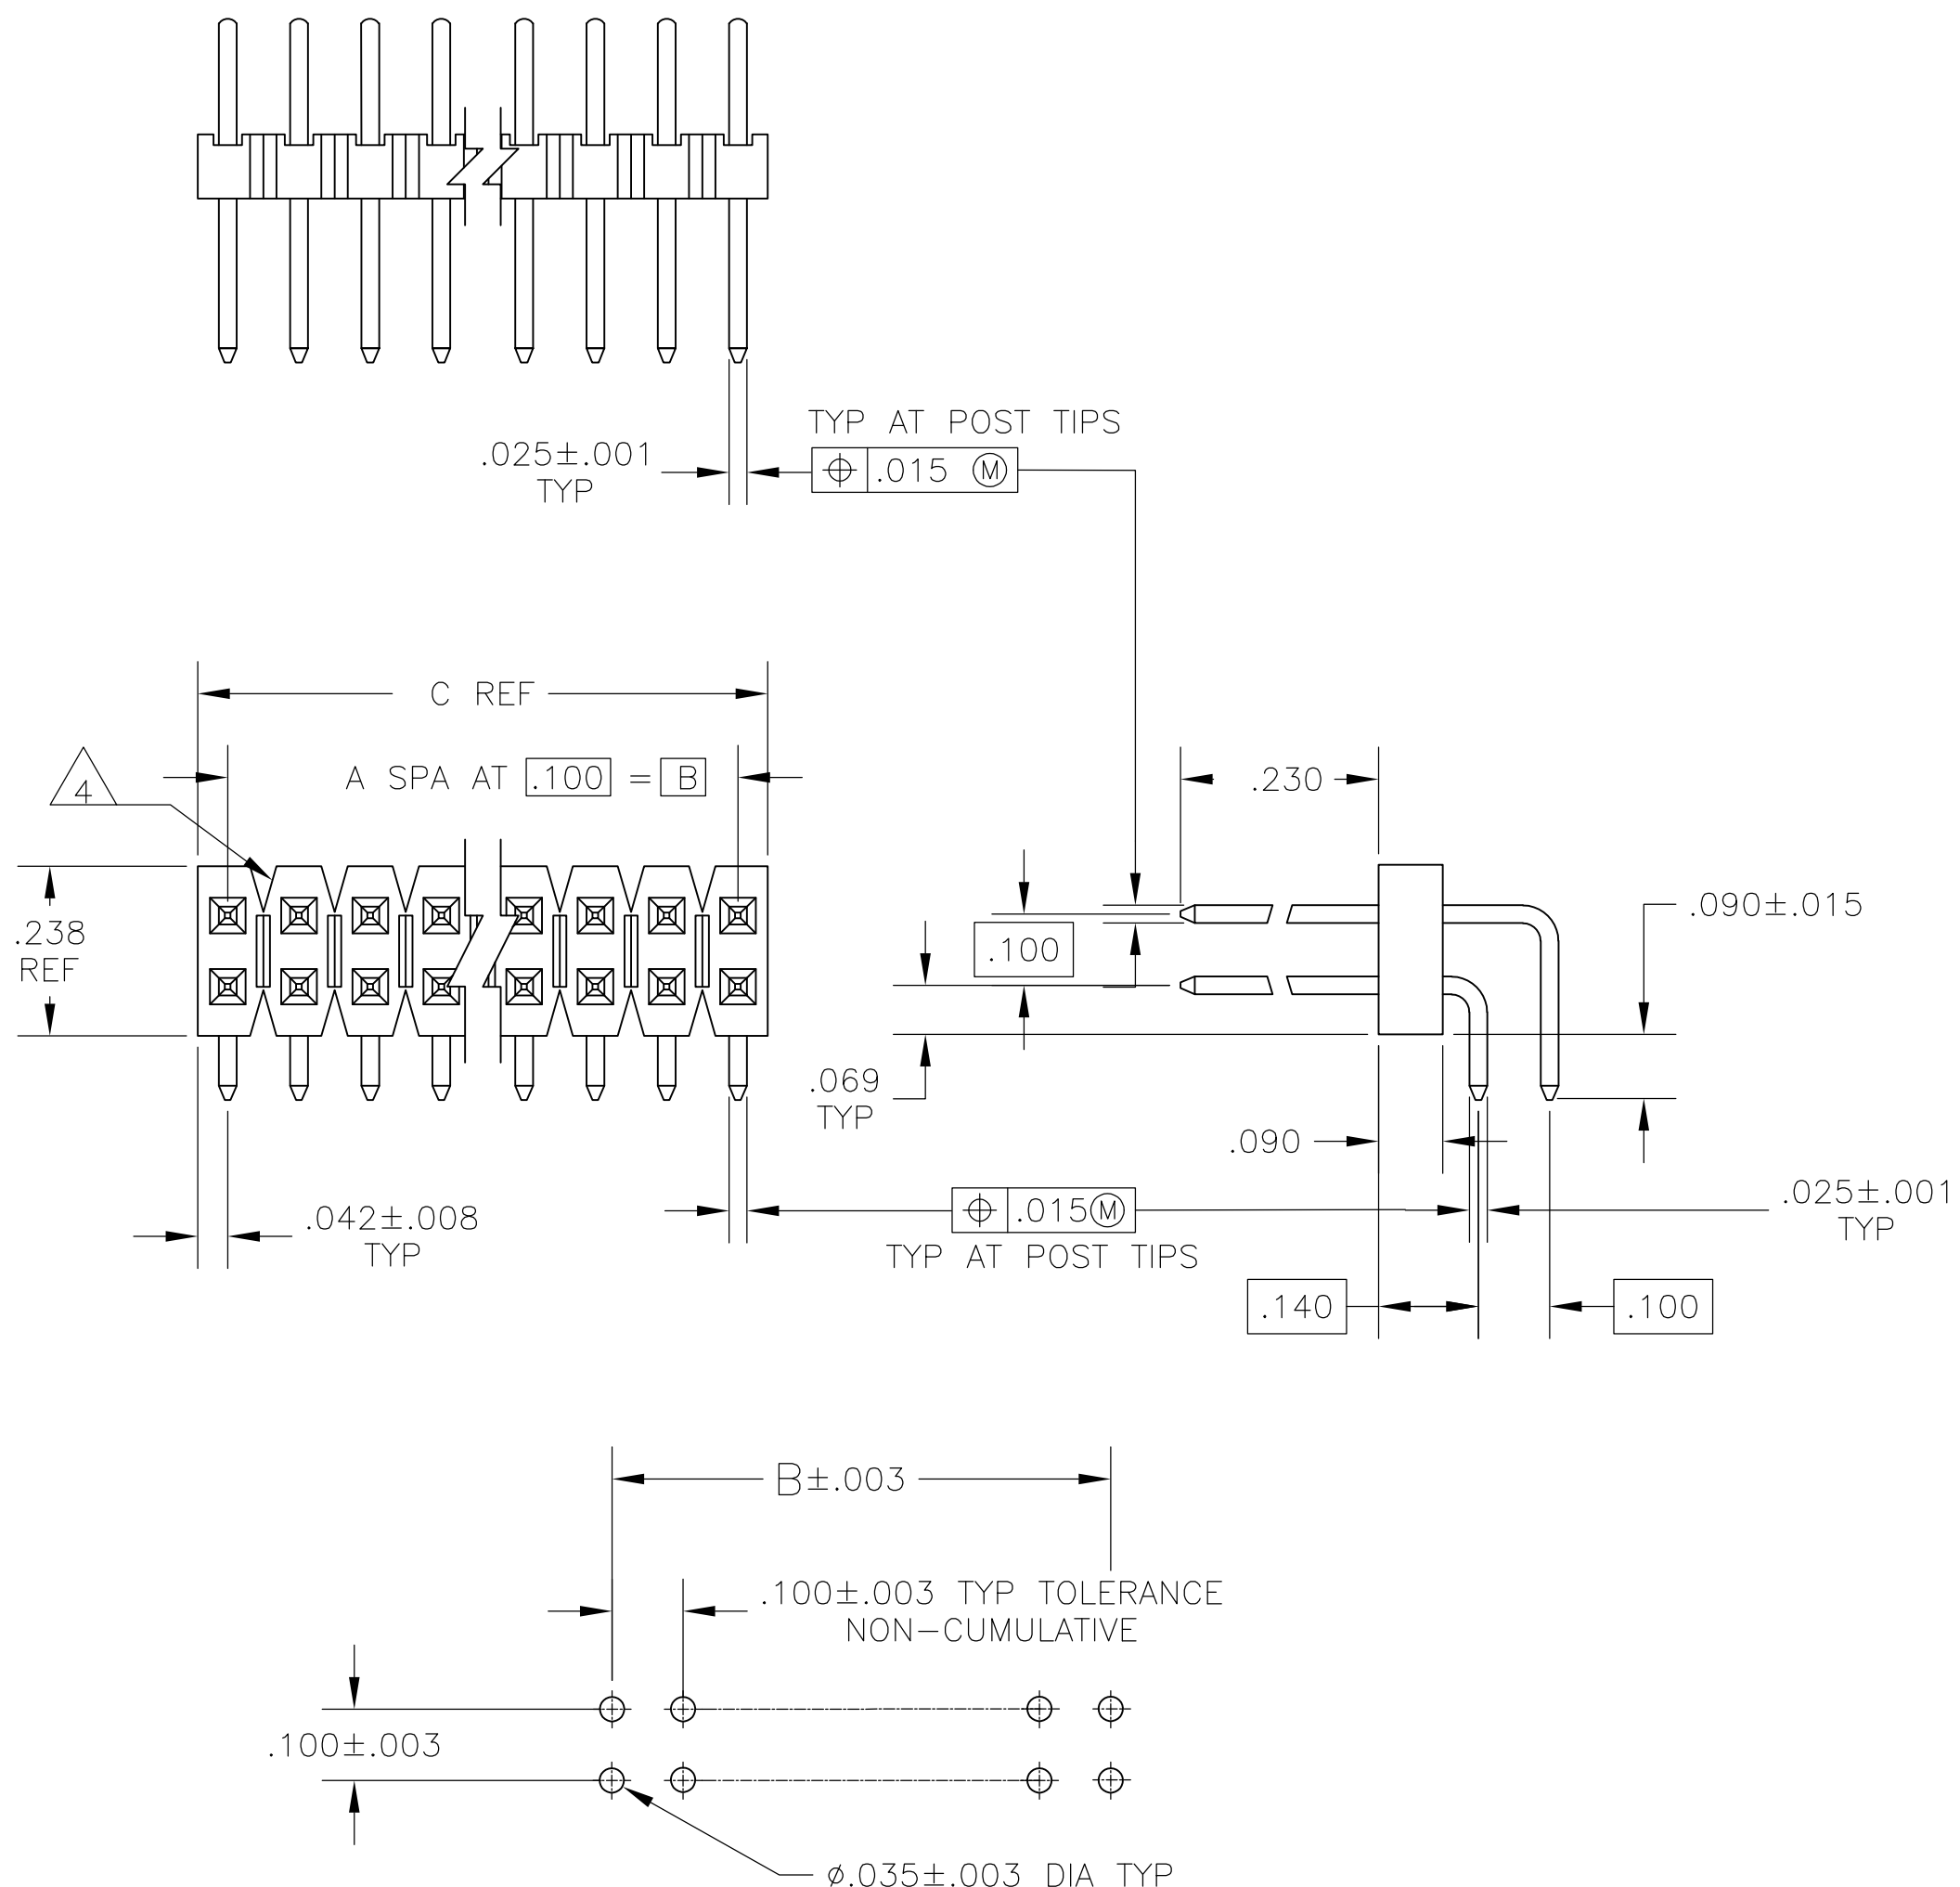

- 1
- ASSEMBLIES MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS
- 2
- TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADERS ARE HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD
- 3
- $.000100-.000200$ MATTE TIN-LEAD OVER $.000050$ NICKEL ENTIRE POST
- 4
- BREAKAWAY NOTCH ANGLE CAN BE ORIENTED TO THE RIGHT (AS SHOWN) OR TO THE LEFT
- 5
- $.000100-.000200$ BRIGHT TIN OVER $.000050$ NICKEL ENTIRE POST
- 6
- PRELIMINARY PART-NOT RELEASED FOR PRODUCTION.
- 7
- $.000100-.000200$ MATTE TIN OVER $.000050$ NICKEL ENTIRE POST
- 8
- HIGH TEMP CONFIGURATION
- 9
- OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

RECOMMENDED HOLE LAYOUT

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN L. D. RINGLEY 30JUL85	TE Connectivity			
DIMENSIONS: INCHES		CHK J. GESFORD 27AUG03				
	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD J. GESFORD 27AUG03	NAME			
		PRODUCT SPEC	ASSEMBLY, MOD II, HEADER, BREAKAWAY, DOUBLE ROW, RIGHT ANGLE, $.100 \times .100$ C/L, WITH $.025$ SQ. POSTS			
MATERIAL CONTACT: COPPER ALLOY	FINISH SEE TABLE	WEIGHT -	SIZE A2	CAGE CODE 00779	DRAWING NO C=103795	RESTRICTED TO -
		CUSTOMER DRAWING	SCALE 4:1	SHEET 1 OF 2	REV M	

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.

© COPYRIGHT - By -


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
AD	00		—	SEE SHEET 1	—	—	—

OBSOLETE			3.984	3.900	39	80	9-103795-0
			3.884	3.800	38	78	8-103795-9
			3.784	3.700	37	76	8-103795-8
			3.684	3.600	36	74	8-103795-7
			3.584	3.500	35	72	8-103795-6
			3.484	3.400	34	70	8-103795-5
			3.284	3.300	33	68	8-103795-4
			3.284	3.200	32	66	8-103795-3
			3.184	3.100	31	64	8-103795-2
			3.084	3.000	30	62	8-103795-1
			2.984	2.900	29	60	8-103795-0
			2.884	2.800	28	58	7-103795-9
			2.784	2.700	27	56	7-103795-8
			2.684	2.600	26	54	7-103795-7
			2.584	2.500	25	52	7-103795-6
			2.484	2.400	24	50	7-103795-5
			2.384	2.300	23	48	7-103795-4
			2.284	2.200	22	46	7-103795-3
			2.184	2.100	21	44	7-103795-2
			2.084	2.000	20	42	7-103795-1
			1.984	1.900	19	40	7-103795-0
			1.884	1.800	18	38	6-103795-9
OBSOLETE			1.784	1.700	17	36	6-103795-8
			1.684	1.600	16	34	6-103795-7
			1.584	1.500	15	32	6-103795-6
			1.484	1.400	14	30	6-103795-5
			1.384	1.300	13	28	6-103795-4
OBSOLETE			1.284	1.200	12	26	6-103795-3
			1.184	1.100	11	24	6-103795-2
OBSOLETE			1.084	1.000	10	22	6-103795-1
OBSOLETE			.984	.900	9	20	6-103795-0
OBSOLETE			.884	.800	8	18	5-103795-9
			.784	.700	7	16	5-103795-8
			.684	.600	6	14	5-103795-7
			.584	.500	5	12	5-103795-6
			.484	.400	4	10	5-103795-5
OBSOLETE			.384	.300	3	8	5-103795-4
			.284	.200	2	6	5-103795-3
			.184	.100	1	4	5-103795-2
			.084	—	—	2	5-103795-1
REMARKS		PLATING	C	B	A	NO OF POS	ASSEMBLY PART NUMBER

9 OBSOLETE		5	.384	.300	3	8	4-103795-1
		3	3.984	3.900	39	80	4-103795-0
		3	3.884	3.800	38	78	3-103795-9
		3	3.784	3.700	37	76	3-103795-8
		3	3.684	3.600	36	74	3-103795-7
		3	3.584	3.500	35	72	3-103795-6
		3	3.484	3.400	34	70	3-103795-5
		3	3.284	3.300	33	68	3-103795-4
		3	3.284	3.200	32	66	3-103795-3
		3	3.184	3.100	31	64	3-103795-2
		3	3.084	3.000	30	62	3-103795-1
		3	2.984	2.900	29	60	3-103795-0
		3	2.884	2.800	28	58	2-103795-9
		3	2.784	2.700	27	56	2-103795-8
		3	2.684	2.600	26	54	2-103795-7
		3	2.584	2.500	25	52	2-103795-6
		3	2.484	2.400	24	50	2-103795-5
		3	2.384	2.300	23	48	2-103795-4
		3	2.284	2.200	22	46	2-103795-3
		3	2.184	2.100	21	44	2-103795-2
		3	2.084	2.000	20	42	2-103795-1
		3	1.984	1.900	19	40	2-103795-0
		3	1.884	1.800	18	38	1-103795-9
9 SUPERSEDED		3	1.784	1.700	17	36	1-103795-8
9 OBSOLETE		3	1.684	1.600	16	34	1-103795-7
		3	1.584	1.500	15	32	1-103795-6
		3	1.484	1.400	14	30	1-103795-5
		3	1.384	1.300	13	28	1-103795-4
		3	1.284	1.200	12	26	1-103795-3
9 OBSOLETE		3	1.184	1.100	11	24	1-103795-2
9 OBSOLETE		3	1.084	1.000	10	22	1-103795-1
9 OBSOLETE		3	.984	.900	9	20	1-103795-0
9 SUPERSEDED		3	.884	.800	8	18	103795-9
		3	.784	.700	7	16	103795-8
	9 OBSOLETE	3	.684	.600	6	14	103795-7
		3	.584	.500	5	12	103795-6
		3	.484	.400	4	10	103795-5
9 OBSOLETE	3	.384	.300	3	8	103795-4	
	3	.284	.200	2	6	103795-3	
	3	.184	.100	1	4	103795-2	
	3	.084	—	—	2	103795-1	
	REMARKS	PLATING	C	B	A	NO OF POS	ASSEMBLY PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
INCHES



MATERIAL

-

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ± -
1 PLC ± -
2 PLC ± -
3 PLC ± .005
4 PLC ± -
ANGLES ± -
FINISH SEE TABLE

DWN L. D. RINGLEY 30JUL85
CHK J. GESFORD 27AUG03
APVD J. GESFORD 27AUG03
PRODUCT SPEC
APPLICATION SPEC
WEIGHT -
CUSTOMER DRAWING

TE Connectivity

ASSEMBLY, MOD II, HEADER, BREAKAWAY, DOUBLE ROW, RIGHT ANGLE, .100X.100 C/L, WITH .025 SQ. POSTS

SIZE A2
CAGE CODE 00779
DRAWING NO C=103795
RESTRICTED TO -
SCALE 1:1
SHEET 2 of 2
REV M

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[5-103795-4](#)