


Number of contacts

78+2, 60+4, 42+6, 24+8

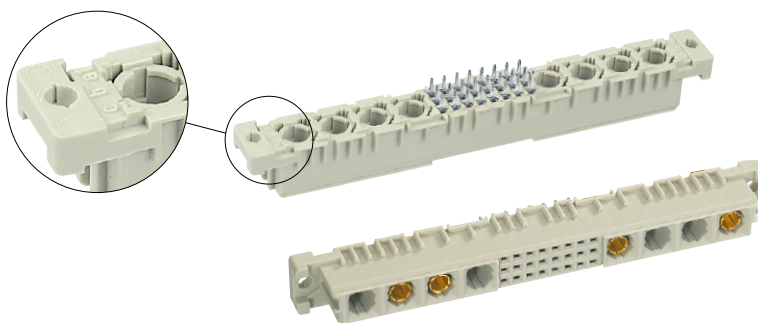

Female connectors

Identification	No. of contacts	Contact arrangement	Performance levels according to IEC 60 603-2. Explanation chapter 00		
			Part number 3	2	1
Female connector with solder pins 2.9 mm (without special contacts)*	78 + 2		Performance level 3 on request	09 03 278 6864 09 03 478 6864 ^{b)}	
	60 + 4			09 03 260 6864	
	42 + 6			09 03 242 6864	
	24 + 8			09 03 224 6864	
Female connector with solder pins 4.5 mm (without special contacts)*	78 + 2			09 03 278 6865	
	60 + 4			09 03 260 6865	
	42 + 6			09 03 242 6865	
	24 + 8			09 03 224 6865	
Female connector with press-in pins 4.5 mm (without special contacts)*	78 + 2			09 03 278 6830	09 03 224 2830
	60 + 4			09 03 260 6830	
	42 + 6			09 03 242 6830	
	24 + 8			09 03 224 6830	
Female connector with press-in pins 13 mm (without special contacts)* with press-in terminations for rear interfacing Usage of HARTING shroud recommended: contacts for rear interfacing selectively gold plated (performance level 3)	78 + 2			09 03 278 6840	09 03 260 2840
	60 + 4			09 03 260 6840	
	42 + 6			09 03 242 6840	
	24 + 8			09 03 224 6840	

* Pre-loaded with special contacts on request

^{b)} Connectors with snap-in clips see chapter 00

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

HARTING:

[09731967904](#) [09736966904](#) [09736966947](#) [09733646903](#) [09731967974](#) [09731966985](#) [09733966902](#)
[09731966995](#) [09736966902](#) [09736646947](#) [09731962904](#) [09731966520](#)