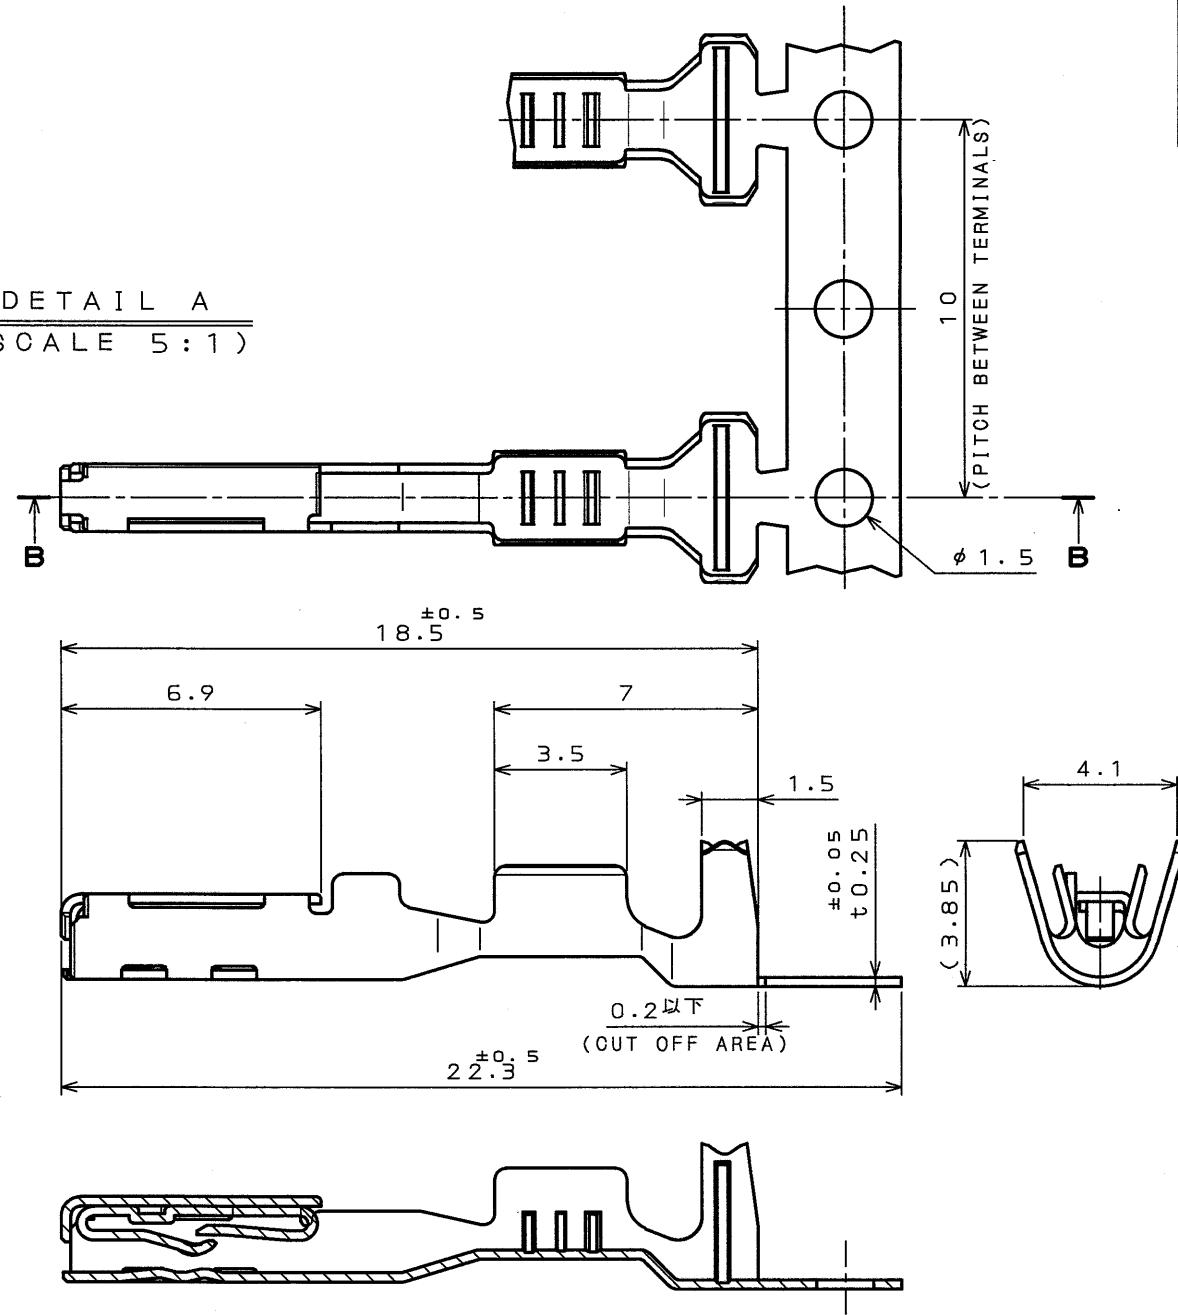


SJO32129
 (DRAWING NO.)

版 数 REV.	年月日 DATE	DCN NO.	変 更 内 容 DESCRIPTION	製 図 DR.	担 当 CHK.	査 閲 APPD.	承 認 APPD.
2	17.Oct.1997	40858	DOWEL ADDITION. NOTES CHANGE	————	M.KAWAMATA	T.TOTANI	I.IIMORI
3	17.Nov.1997	41014	FRAME CHANGE	————	M.KAWAMATA	T.TOTANI	I.IIMORI
4	20.Dec.1999	45306	NOTES CHANGE	————	M.KUROIWA	M.SHINMYO	T.TOTANI
5	29.Oct.2001	49006	JAPANESE → BILINGUAL	J.ICHIIYAMA	M.KUROIWA	—	T. Totani

DETAIL A
(SCALE 5:1)



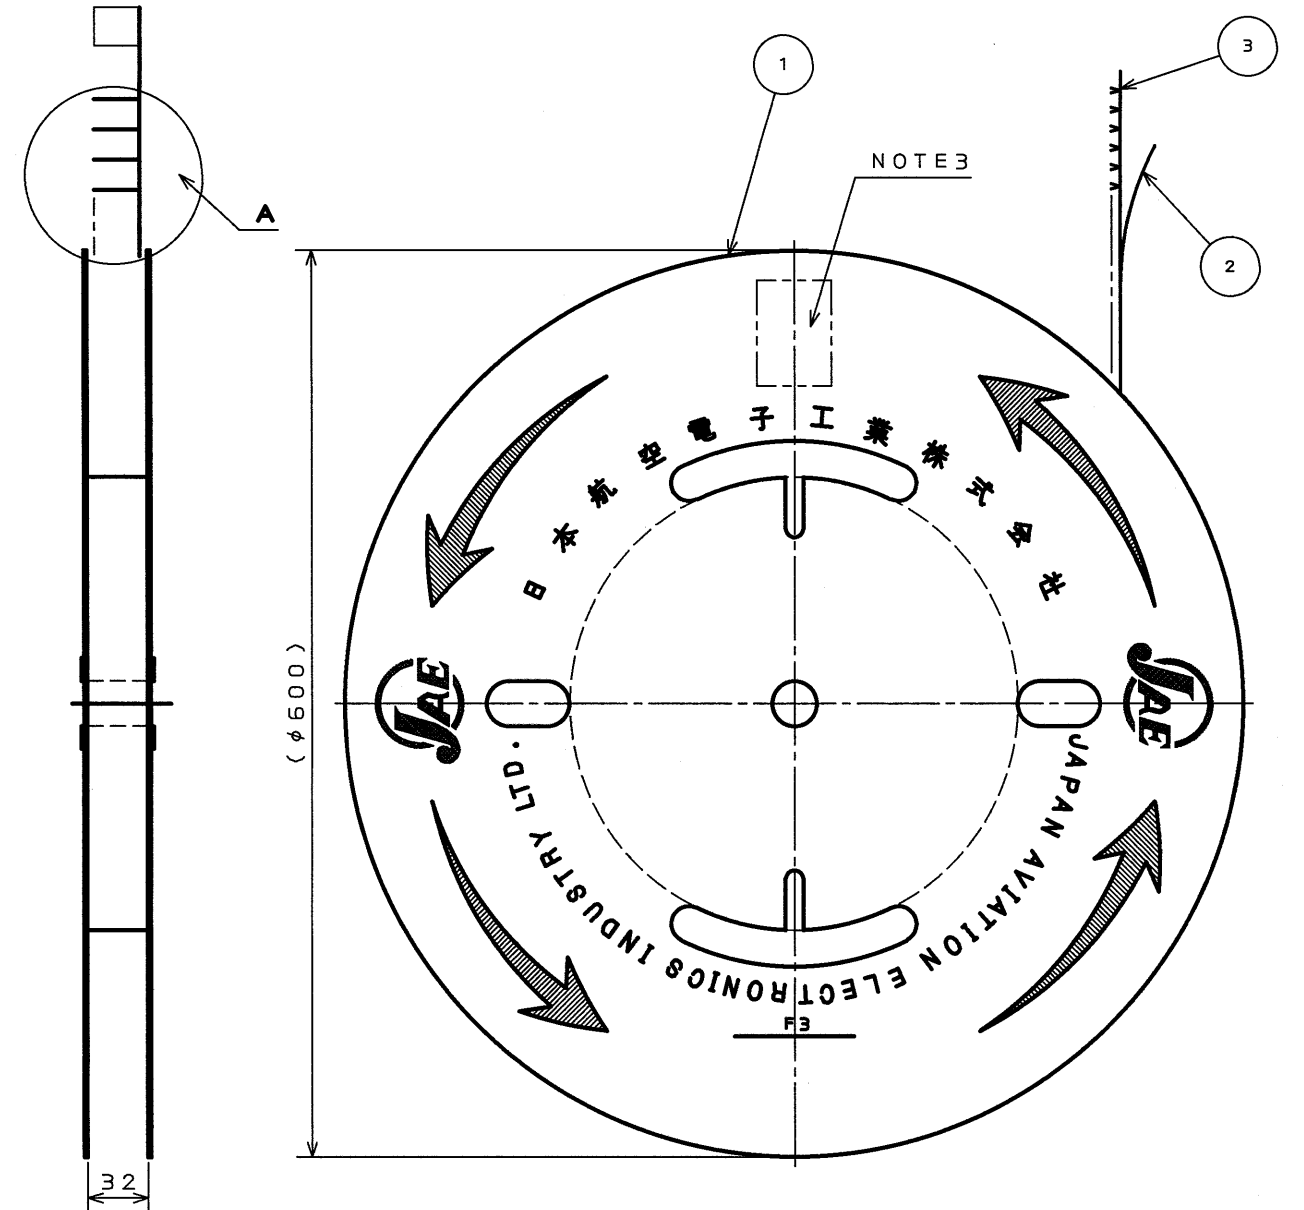
△₂ SECT. B-B
(SCALE 5:1)








NOTE1. STRANDED WIRE WITH NOMINAL SIZE 0.3 TO 0.85mm²,
AND OVERALL DIAMETER ϕ 1.4 TO ϕ 2.3mm SHALL BE APPLIED.
(AVSS 0.3sq ~AVS 0.85sq)

2. THE SHEARED EDGES OF CONTACT SHALL NOT BE PLATED.

3. PRODUCT SLIP SHOWS 4,000 CONTACTS AND PART NUMBER.

△△ 注 1. 使用電線は、導体断面積0.3～0.85mm²、被覆外径φ1.4～φ2.3の燃線とする。
(AVSS0.3sq～AVS0.85sq)
2. 剪断面に、メッキは付かない。
3. 現品票により数量4000及び品名を表示する。



3	SIGNAL TERMINAL	4000	COPPER ALLOY	TIN PLATING	
2	TAPE	1	PAPER	_____	
1	REEL	1	PAPER	_____	
符号 NO.	名称 DESCRIPTION	个数 QTY.	材料 MATERIAL	仕上 FINISH	備考 REMARKS
仕様書 (SPECIFICATION)		第1版 (ORIGINAL DATE) 11.Jul.1997		 	
		製図 DR.	_____	 	
公差 (GENERAL TOLERANCE)		担当 CHK.	M.KAWAMATA	 	
寸法 (DIMENSION)		査閲 APPD.	T.TOTANI	 	
. ± 0.8 .X ± 0.4 .XX ± 0.1 .XXX ±		承認 APPD.	K.TAKEGAWA	 	
				 	

JAE Connector Div. Proprietary.
Copyright © Japan Aviation Electronics Industry, Ltd.

本図面は日本航空電子工業(株)の所有する情報を含むもので当社の許可なく複製を禁止する。
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO JAE AND CAN NOT BE REPRODUCED WITHOUT WRITTEN CONSENT OF JAE.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[JAE Electronics:](#)

[M12S04K954](#)