





MATERIALS AND FINISHES

BODY BRASS
PLATED SEE TABLE

CENTER CONTACT BERYLLIUM COPPER
PLATED GOLD

INSULATOR TEFLON

COUPLING PROOF TORQUE:
0.90 N-m(8 IN-LB) MAXIMUM
WITH SUPPORT WRENCH

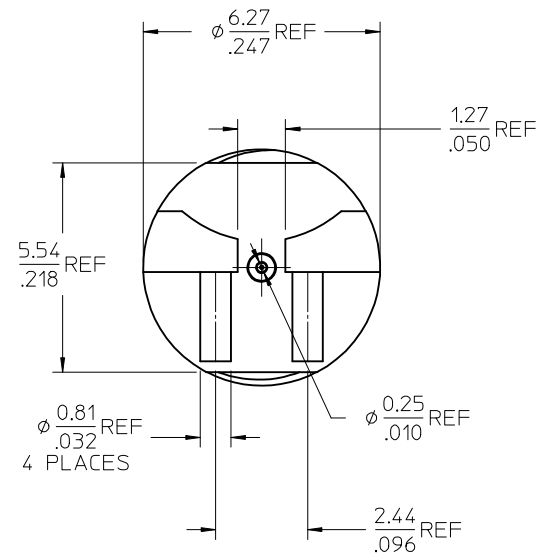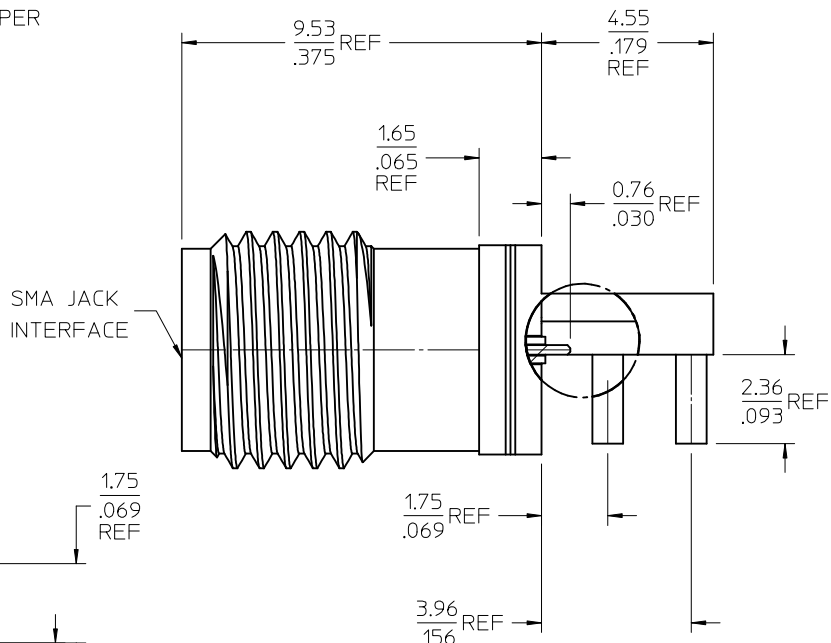

RECOMMENDED PCB LAYOUT

PS-89675-3670	PRODUCT SPECIFICATION
MIL-STD-348A, FIG. 310.2	INTERFACE
SPECIFICATION	DESCRIPTION

73251-3461	NICKEL
73251-3460	GOLD
PART NO.	PLATING/FINISH

CHG: UPDATE VIEW FOR INSULATOR LENGTH	EC NO: URF2009-0550 DRWN: JWIENER 2009/03/24 CHKD: SSHAH 2009/03/24 APPR: JWIENER 2009/03/24	DESCRIPTION	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM/IN		SCALE	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION	
					mm	INCH	DRAWN BY	DATE	TITLE		
				4 PLACES	± ---	± ---	SSS	2008/06/13	SMA JACK, PCB, EDGEMOUNT 50 OHMS, EWR3652		
				3 PLACES	± ---	± ---	CHECKED BY	DATE	SMA-J/PCB		
				2 PLACES	± ---	± ---	AZR	2008/06/13	MOLEX INCORPORATED		
				1 PLACE	± ---	± ---	APPROVED BY	DATE	SD-73251-346		
				ANGULAR ± 2 °			JDW	2008/06/13	SHEET NO. 1 OF 1		
				DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			MATERIAL NO.		DOCUMENT NO.		
							SEE TABLE				
							SIZE C		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Molex:

73251-3460