
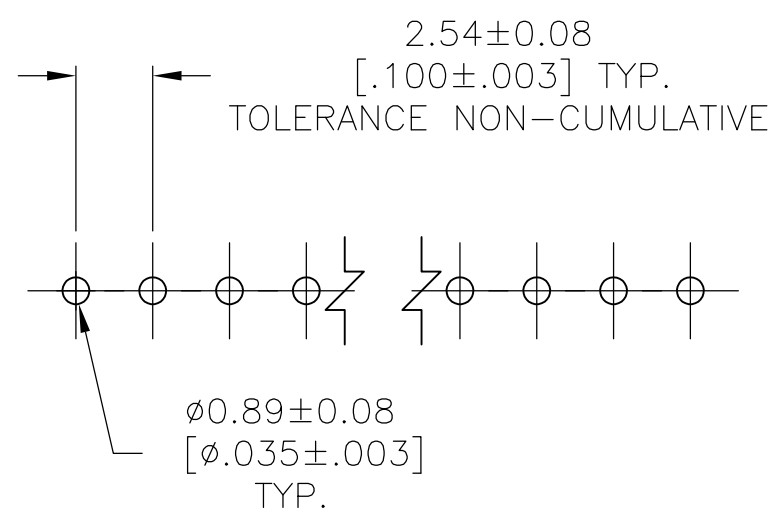
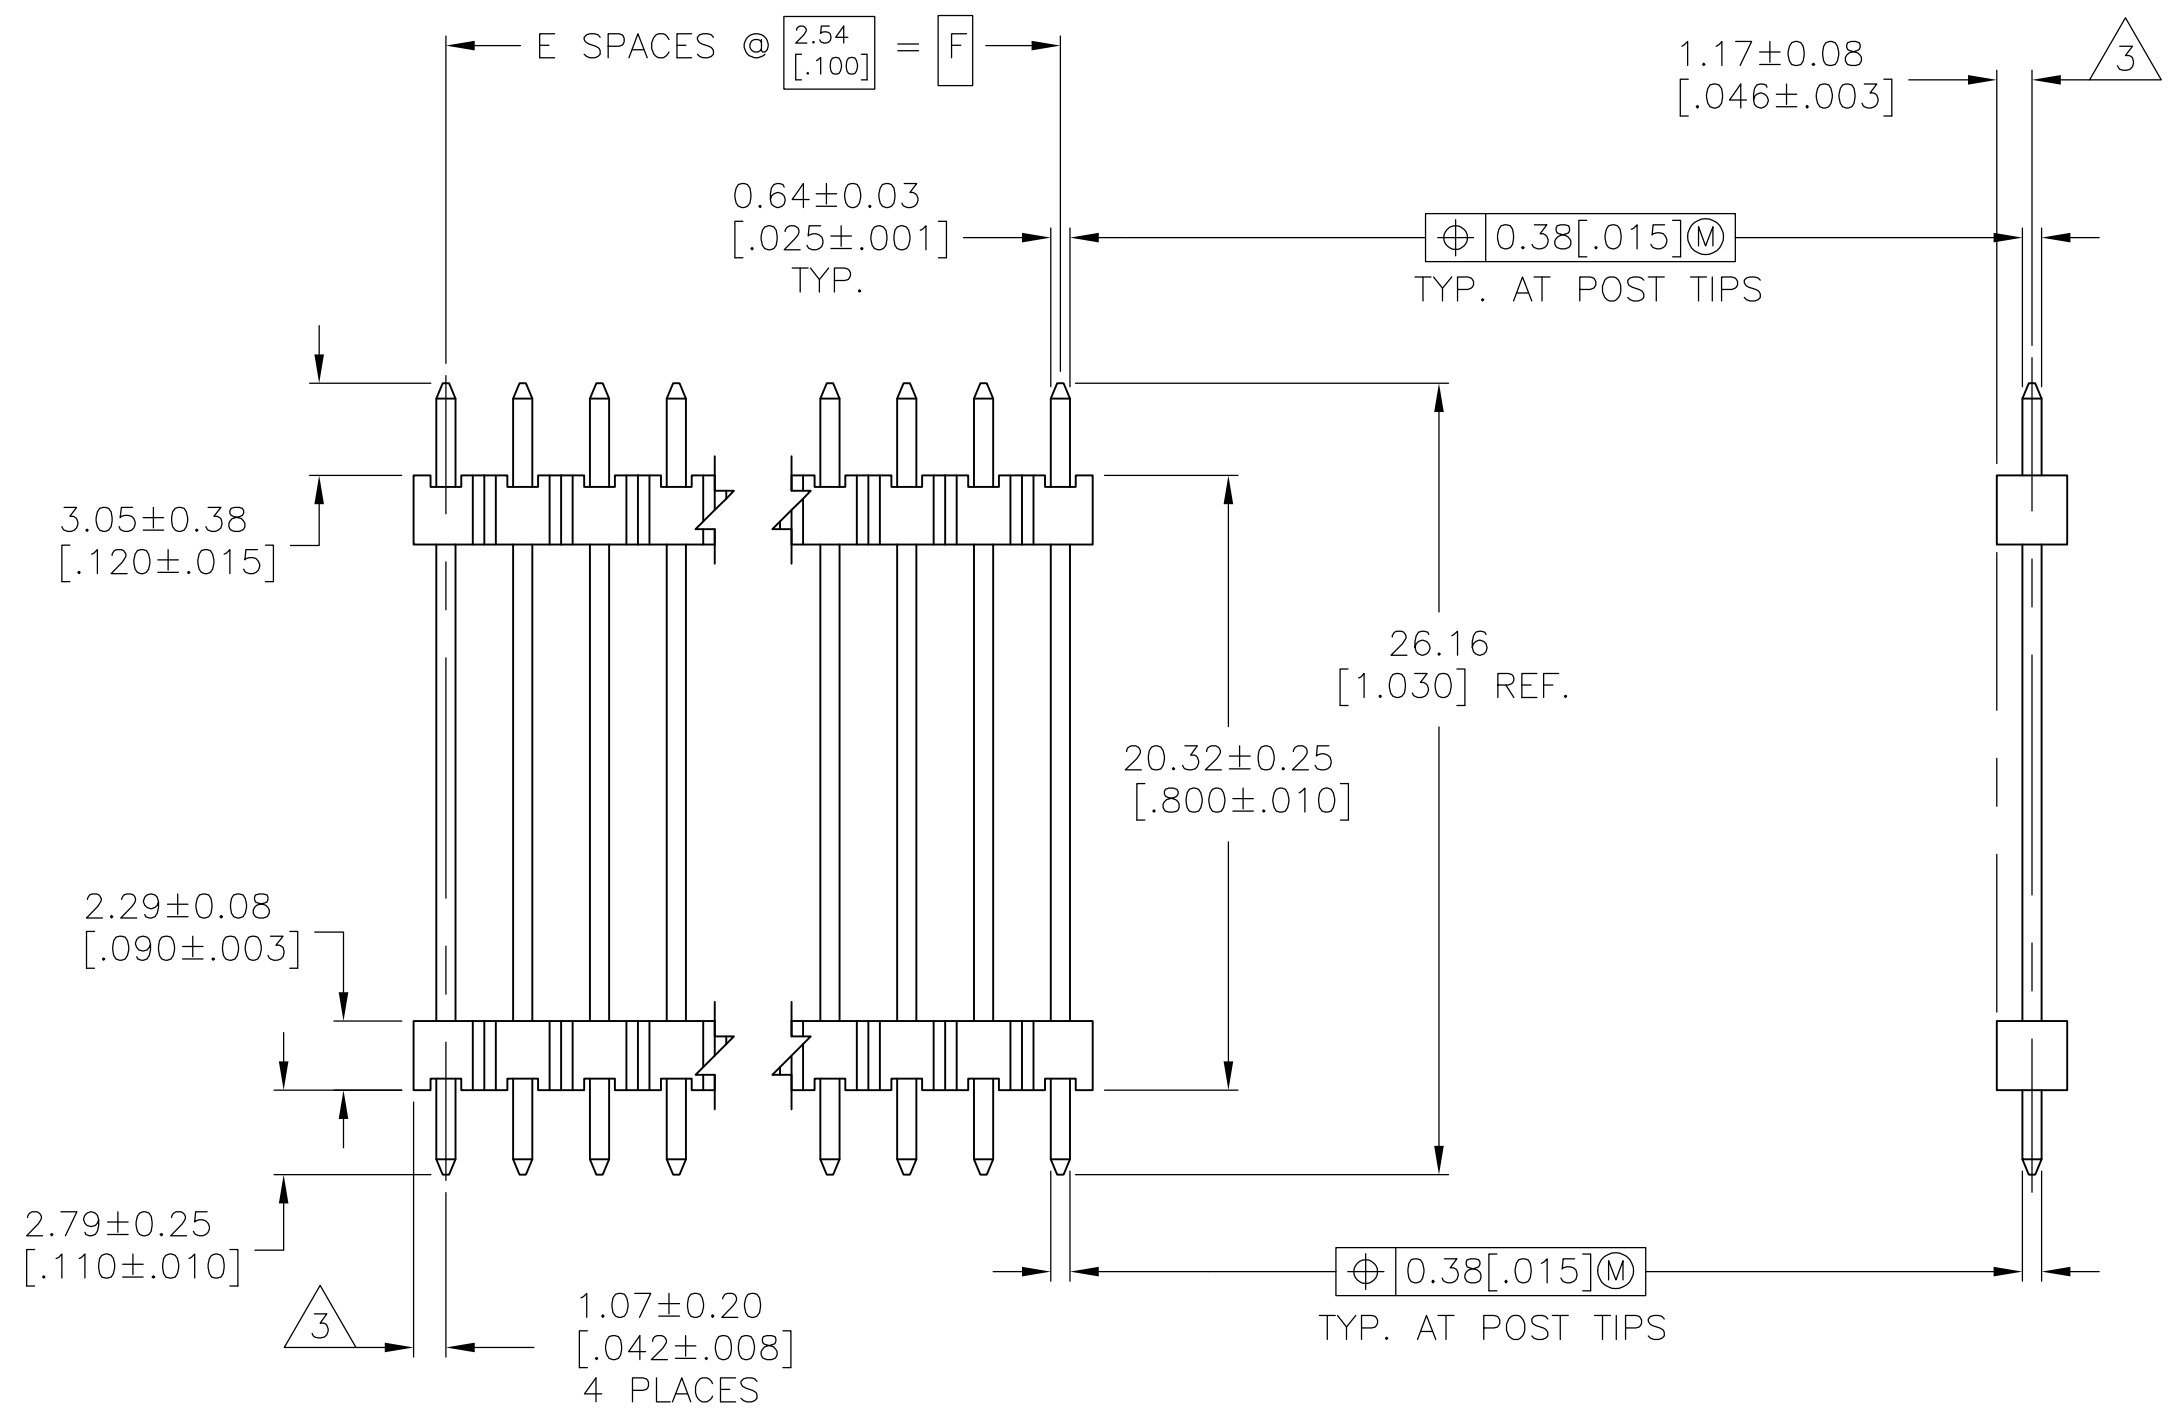



LOC	DIST	REVISIONS					
AD	39	P	LTR	DESCRIPTION	DATE	DWN	APVD
			A1	REVISED PER ECO-11-004820	11MAR11	RK	HMR

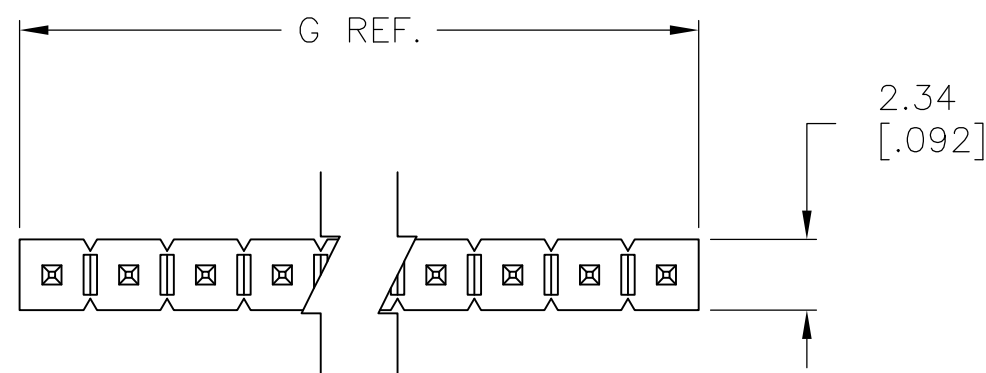

1. ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS
2. TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADER IS HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD
3. THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING
4. HOUSING: FLAME RETARDANT THERMOPLASTIC; COLOR: BLACK.
5. FINISH: 0.00254–0.00508 [.000100–.000200] BRIGHT TIN–LEAD OVER 0.00127 [.000050] NICKEL ENTIRE POST.
6. FINISH: 0.00254–0.00508 [.000100–.000200] MATTE TIN OVER 0.00127 [.000050] NICKEL ENTIRE POST.

6	101.19 [3.984]	99.06 [3.900]	39	40	9-146468-0
6	98.65 [3.884]	96.52 [3.800]	38	39	8-146468-9
6	96.1 [3.784]	93.98 [3.700]	37	38	8-146468-8
6	93.57 [3.684]	91.44 [3.600]	36	37	8-146468-7
6	91.03 [3.584]	88.90 [3.500]	35	36	8-146468-6
6	88.49 [3.484]	86.36 [3.400]	34	35	8-146468-5
6	85.95 [3.384]	83.82 [3.300]	33	34	8-146468-4
6	83.41 [3.284]	81.28 [3.200]	32	33	8-146468-3
6	80.87 [3.184]	78.74 [3.100]	31	32	8-146468-2
6	78.33 [3.084]	76.20 [3.000]	30	31	8-146468-1
6	75.79 [2.984]	73.66 [2.900]	29	30	8-146468-0
6	73.25 [2.884]	71.12 [2.800]	28	29	7-146468-9
6	70.71 [2.784]	68.58 [2.700]	27	28	7-146468-8
6	68.17 [2.684]	66.04 [2.600]	26	27	7-146468-7
6	65.63 [2.584]	63.50 [2.500]	25	26	7-146468-6
6	63.09 [2.484]	60.96 [2.400]	24	25	7-146468-5
6	60.55 [2.384]	58.42 [2.300]	23	24	7-146468-4
6	58.0 [2.284]	55.88 [2.200]	22	23	7-146468-3
6	55.47 [2.184]	53.34 [2.100]	21	22	7-146468-2
6	52.93 [2.084]	50.80 [2.000]	20	21	7-146468-1
6	50.39 [1.984]	48.26 [1.900]	19	20	7-146468-0
6	47.85 [1.884]	45.72 [1.800]	18	19	6-146468-9
6	45.31 [1.784]	43.18 [1.700]	17	18	6-146468-8
6	42.77 [1.684]	40.64 [1.600]	16	17	6-146468-7
6	40.23 [1.584]	38.10 [1.500]	15	16	6-146468-6
6	37.69 [1.484]	35.56 [1.400]	14	15	6-146468-5
6	35.15 [1.384]	33.02 [1.300]	13	14	6-146468-4
6	32.61 [1.284]	30.48 [1.200]	12	13	6-146468-3
6	30.07 [1.184]	27.94 [1.100]	11	12	6-146468-2
6	27.53 [1.084]	25.40 [1.000]	10	11	6-146468-1
6	24.99 [.984]	22.86 [.900]	9	10	6-146468-0
6	22.45 [.884]	20.32 [.800]	8	9	5-146468-9
6	19.91 [.784]	17.78 [.700]	7	8	5-146468-8
6	17.37 [.684]	15.24 [.600]	6	7	5-146468-7
6	14.83 [.584]	12.70 [.500]	5	6	5-146468-6
6	12.29 [.484]	10.16 [.400]	4	5	5-146468-5
6	9.75 [.384]	7.62 [.300]	3	4	5-146468-4
6	7.21 [.284]	5.08 [.200]	2	3	5-146468-3
6	4.67 [.184]	2.54 [.100]	1	2	5-146468-2
6	2.13 [.084]	-	-	1	5-146468-1
PLATING	G	F	E	NO. OF POSITIONS	PART NUMBER

5	101.19 [3.984]	99.06 [3.900]	39	40	4-146468-0
5	98.65 [3.884]	96.52 [3.800]	38	39	3-146468-9
5	96.17 [3.784]	93.98 [3.700]	37	38	3-146468-8
5	93.57 [3.684]	91.44 [3.600]	36	37	3-146468-7
5	91.03 [3.584]	88.90 [3.500]	35	36	3-146468-6
5	88.49 [3.484]	86.36 [3.400]	34	35	3-146468-5
5	85.95 [3.384]	83.82 [3.300]	33	34	3-146468-4
5	83.41 [3.284]	81.28 [3.200]	32	33	3-146468-3
5	80.87 [3.184]	78.74 [3.100]	31	32	3-146468-2
5	78.33 [3.084]	76.20 [3.000]	30	31	3-146468-1
5	75.79 [2.984]	73.66 [2.900]	29	30	3-146468-0
5	73.25 [2.884]	71.12 [2.800]	28	29	2-146468-9
5	70.71 [2.784]	68.58 [2.700]	27	28	2-146468-8
5	68.17 [2.684]	66.04 [2.600]	26	27	2-146468-7
5	65.63 [2.584]	63.50 [2.500]	25	26	2-146468-6
5	63.09 [2.484]	60.96 [2.400]	24	25	2-146468-5
5	60.55 [2.384]	58.42 [2.300]	23	24	2-146468-4
5	58.01 [2.284]	55.88 [2.200]	22	23	2-146468-3
5	55.47 [2.184]	53.34 [2.100]	21	22	2-146468-2
5	52.93 [2.084]	50.80 [2.000]	20	21	2-146468-1
5	50.39 [1.984]	48.26 [1.900]	19	20	2-146468-0
5	47.85 [1.884]	45.72 [1.800]	18	19	1-146468-9
5	45.31 [1.784]	43.18 [1.700]	17	18	1-146468-8
5	42.77 [1.684]	40.64 [1.600]	16	17	1-146468-7
5	40.23 [1.584]	38.10 [1.500]	15	16	1-146468-6
5	37.69 [1.484]	35.56 [1.400]	14	15	1-146468-5
5	35.15 [1.384]	33.02 [1.300]	13	14	1-146468-4
5	32.61 [1.284]	30.48 [1.200]	12	13	1-146468-3
5	30.07 [1.184]	27.94 [1.100]	11	12	1-146468-2
5	27.53 [1.084]	25.40 [1.000]	10	11	1-146468-1
5	24.99 [.984]	22.86 [.900]	9	10	1-146468-0
5	22.45 [.884]	20.32 [.800]	8	9	146468-9
5	19.91 [.784]	17.78 [.700]	7	8	146468-8
5	17.37 [.684]	15.24 [.600]	6	7	146468-7
5	14.83 [.584]	12.70 [.500]	5	6	146468-6
5	12.29 [.484]	10.16 [.400]	4	5	146468-5
5	9.75 [.384]	7.62 [.300]	3	4	146468-4
5	7.21 [.284]	5.08 [.200]	2	3	146468-3
5	4.67 [.184]	2.54 [.100]	1	2	146468-2
5	2.13 [.084]	-	-	1	146468-1
PLATING	G	F	E	NO. OF POSITIONS	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWG. NO. 05-MAR-97	 TE Connectivity			
		CHK. G. DUBNICZKI				
		APPV. G. DUBNICZKI				
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 P L C ± 2 P L C ± 2 P L C ± 0.51 [0.02] 0.10 [0.0039] 4 P L C ± 0.0127 [0.0005] ANGLES ±		NAME		
		PRODUCT SPEC APPLICATION SPEC		HEADER ASSEMBLY, MOD II, STACKING, SINGLE ROW, .025 SQ.POST, UNSHROUDED		
MATERIAL	FINISH	WEIGHT	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
	SEE TABLE	—	A1	00779	C146468	—
CUSTOMER DRAWING			SCALE	4:1	SHEET	1 OF 1
			REV A			

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[2-146468-2](#)