


REV. 4 8/31/95

COIL:	CUSTOMER DATA SHEET	
RESISTANCE	1500 OHMS	± 10%
NOMINAL VOLTAGE	26.5 VDC	
MUST OPERATE	13.5 VDC	
MUST RELEASE	1.5 VDC	

ENVIRONMENT:

VIBRATION 10 CPS TO 2000 CPS @ 20 g's
 SHOCK 100 g's 6 MS. DURATION
 TEMPERATURE -65 °C TO +125 °C

NOTES: (LEVEL L ACCEPTANCE TESTING ONLY)

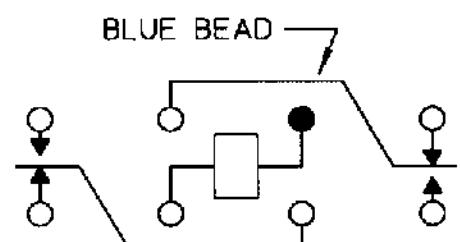

CONTACT RATING:
 1 AMP 28 VDC RESISTIVE
 100,000 OPERATIONS

DR. R.B. 1/21/93 CK. 8/31/95 JMB

CUST. QPL
 CUST. NO. M39016/34-008

TYPE "MFW" RELAY

COMMUNICATIONS
 INSTRUMENTS, INC.

MF W1201N03

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[MFW1201N03](#)