

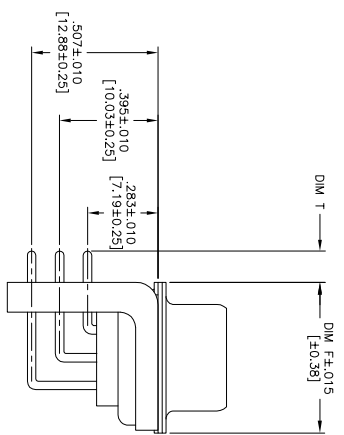
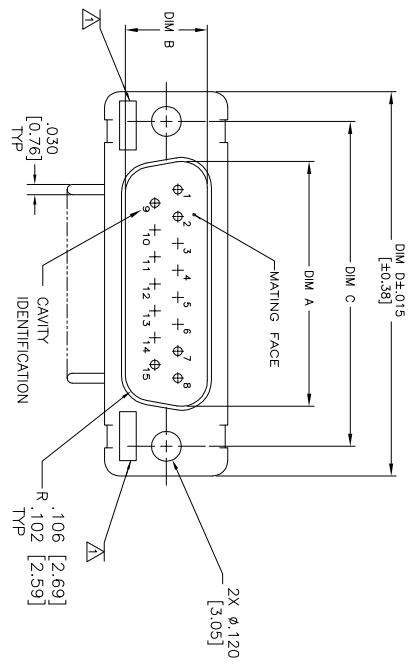


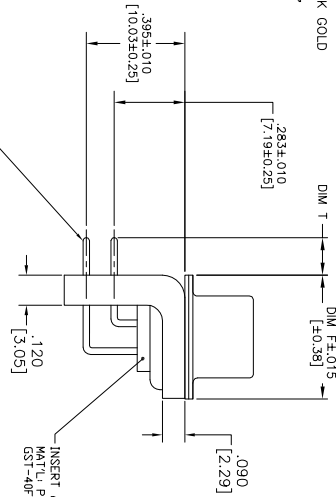

2
AMP AND DATE CODE MARKED
ON FAR SIDE

SHELL
MAT'L: BRASS PER ASTM B36
FINISH: .000050 [0.00127] MIN THK GOLD
PER ASTM B488, TYPE I, GRADE C,
OVER COPPER PER MIL-C-14550

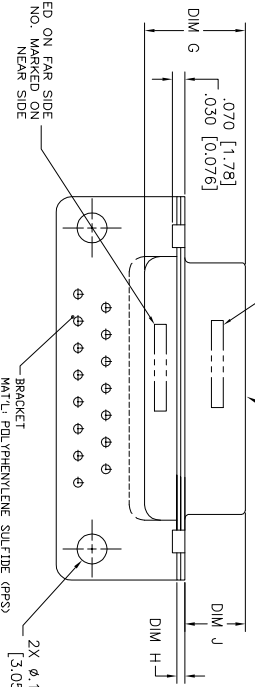

SIZE 5 CONTACT CONFIGURATION

—INSERT ASSEMBLY
MAT'L: POLYPHENYLENE SULFIDE (PPS)
GST-40F PER MIL-M-24519

-DTL-24308

SIZE 1, 2, 4 CONTACT CONFIGURATION

POSTED PIN CONTACT (QTY = NO. OF POSN)
MATERIAL: BRASS PER ASTM B16
FINISH: .000050 [0.0012]-.000150 [0.0038]
THK GOLD PER ASTM B488, TYPE I, GRADE 1
OVER NICKEL PER QQ-N-290, .000050 [0.0012] C
.000150 [0.0038] THK

[illegible]

UL/CSA DESIGNATION STAMPED IN THIS AREA; OPTIONAL.

THE FAR SIDE REFERS TO WIDE SIDE OF KEYSTONE.

3. EPOXY IS APPLIED BETWEEN SHELLS AND INSERT AND ALL AROUND CONTACTS TO SEAL THE BACKSIDE OF THE ASSEMBLY FROM CONFORMAL COATING.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1883569-2](#)