

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.



| | |
|--|--|
| Material | High Conductivity Seamless Copper Tube |
| Plating | Electro-Tin |
| Wire Size | 4 AWG |
| Wire Type | Stranded Copper; Class B: Compact, Compressed or Concentric, Class C: Concentric |
| Wire Strip Length | 5/8 in. |
| Stud Size | #10 |
| UL Listed Wire Connector | Yes, for applications up to 35kv. Consult cable manufacturer for voltage stress relief instructions with applications greater than 2000 volts. |
| UL Temperature Rating | 90 ° C |
| C.S.A Certified Wire Connector | Yes |
| Panduit Color Code on Barrel | GRAY |
| Panduit Die Index No. on Barrel | P29 |
| Alternate Industry Die Index No. () on Barrel | (8) |



CERTIFIED



LISTED
Wire Connector

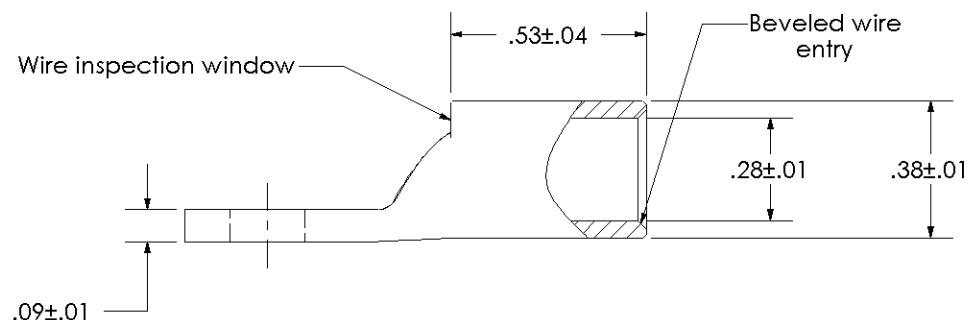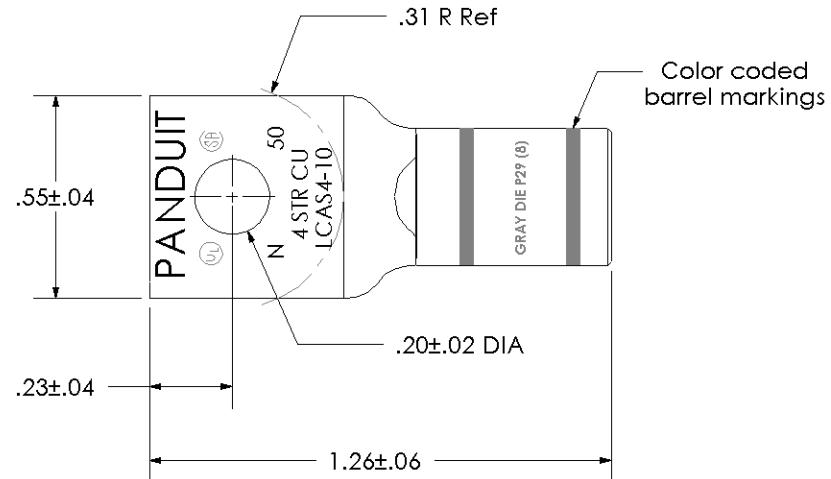

| | | | | | | | | |
|-----|------|-----|-----|--------------------------------------|-------|---|-----------------------|---------------|
| 01 | 3-04 | PWS | PWS | REMOVED PANDUIT FROM BARREL MARKINGS | 10790 | PANDUIT CORP. TINLEY PARK, ILLINOIS LCAS4-10-L Copper Lug - One-Hole, Short Barrel | | |
| REV | DATE | BY | CHK | DESCRIPTION | ECN | SCALE N/A | DRAWING NO / CAD FILE | LCAS4-10-CUST |

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Panduit](#):

[LCAS4-10-L](#)