



LOC		REV		REVISIONS		DATE	APPD
G	14	P	F	ZONE	LTR	DESCRIPTION	
				D		REV, RDRW, & SM PKG PER 0720-0040-93	4-8-93

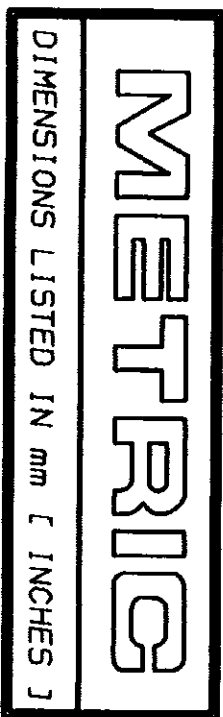


AMP WIRE RANGE		UL E13288 Listed	
22-16 AWG	SOLID OR STRANDED	22-16 AWG	SOLID OR STRANDED
LR7189 Certified		MILITARY P/N AND CLASS	
22-16 AWG	SOLID OR STRANDED	NOT APPLICABLE	

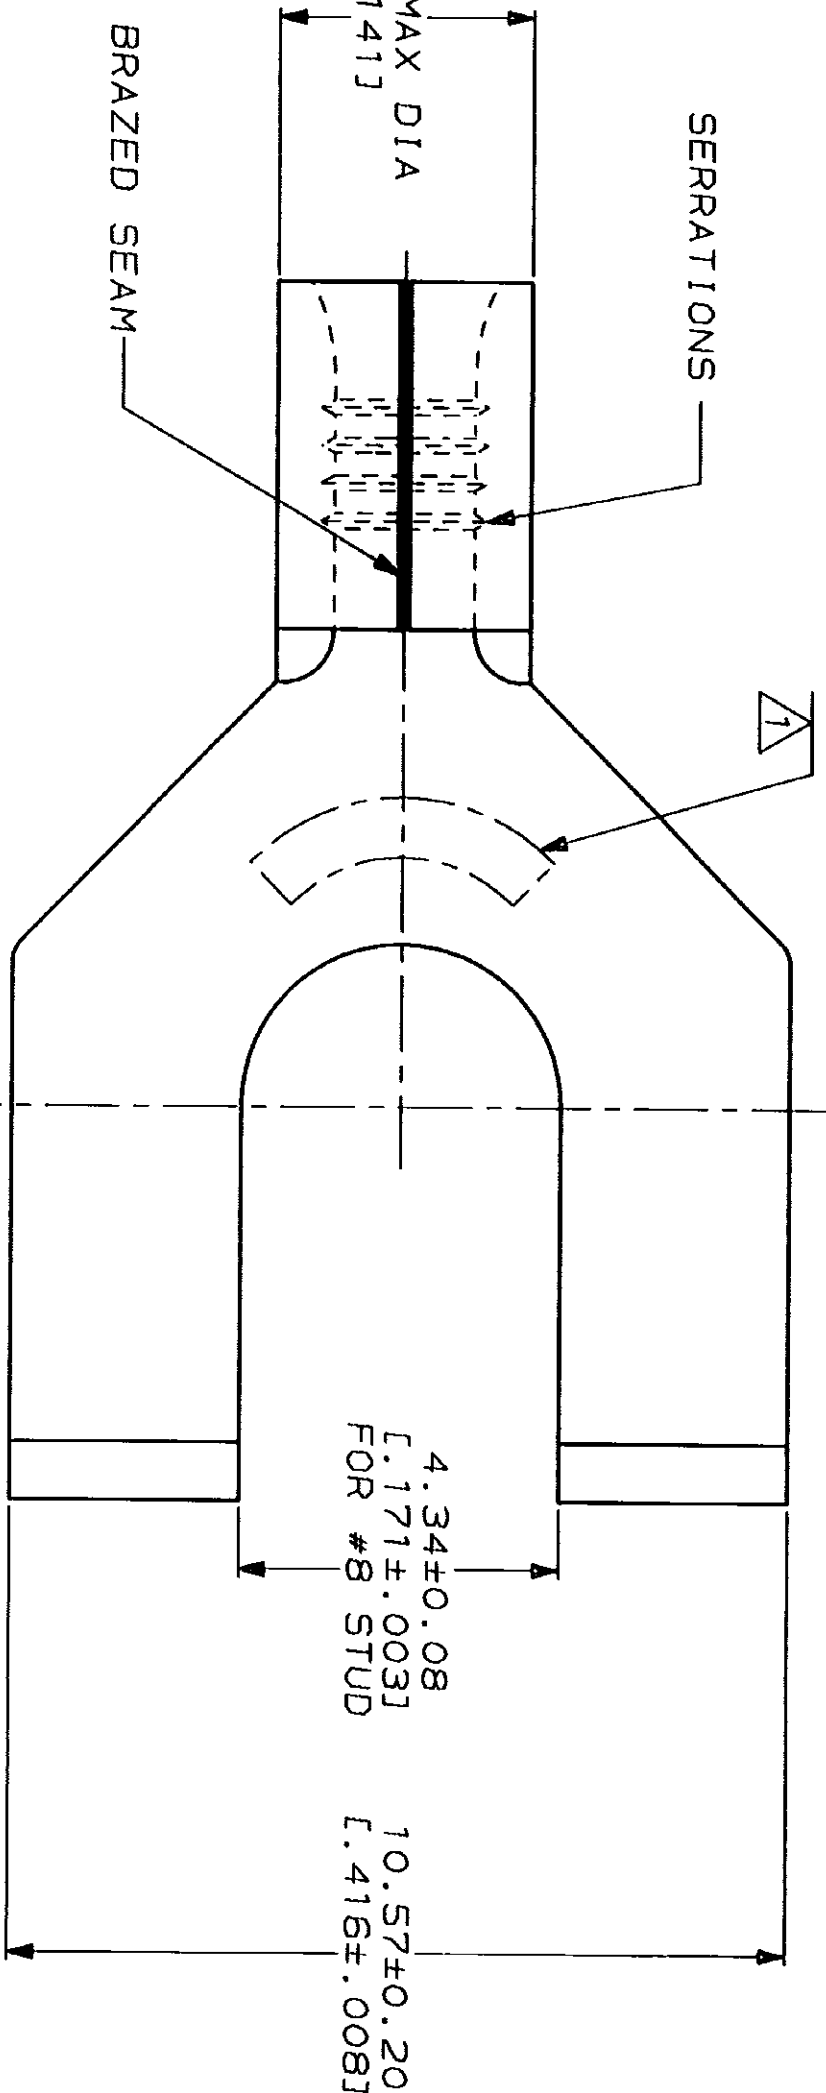

STAMP AMP 22-18* APPROX AS SHOWN

22-16 TERMINALS ARE STAMPED 22-18 IN
ACCORDANCE WITH MILITARY SPECIFICATION
MIL-T-7928; COMMERCIAL WIRE RANGE IS 22-16

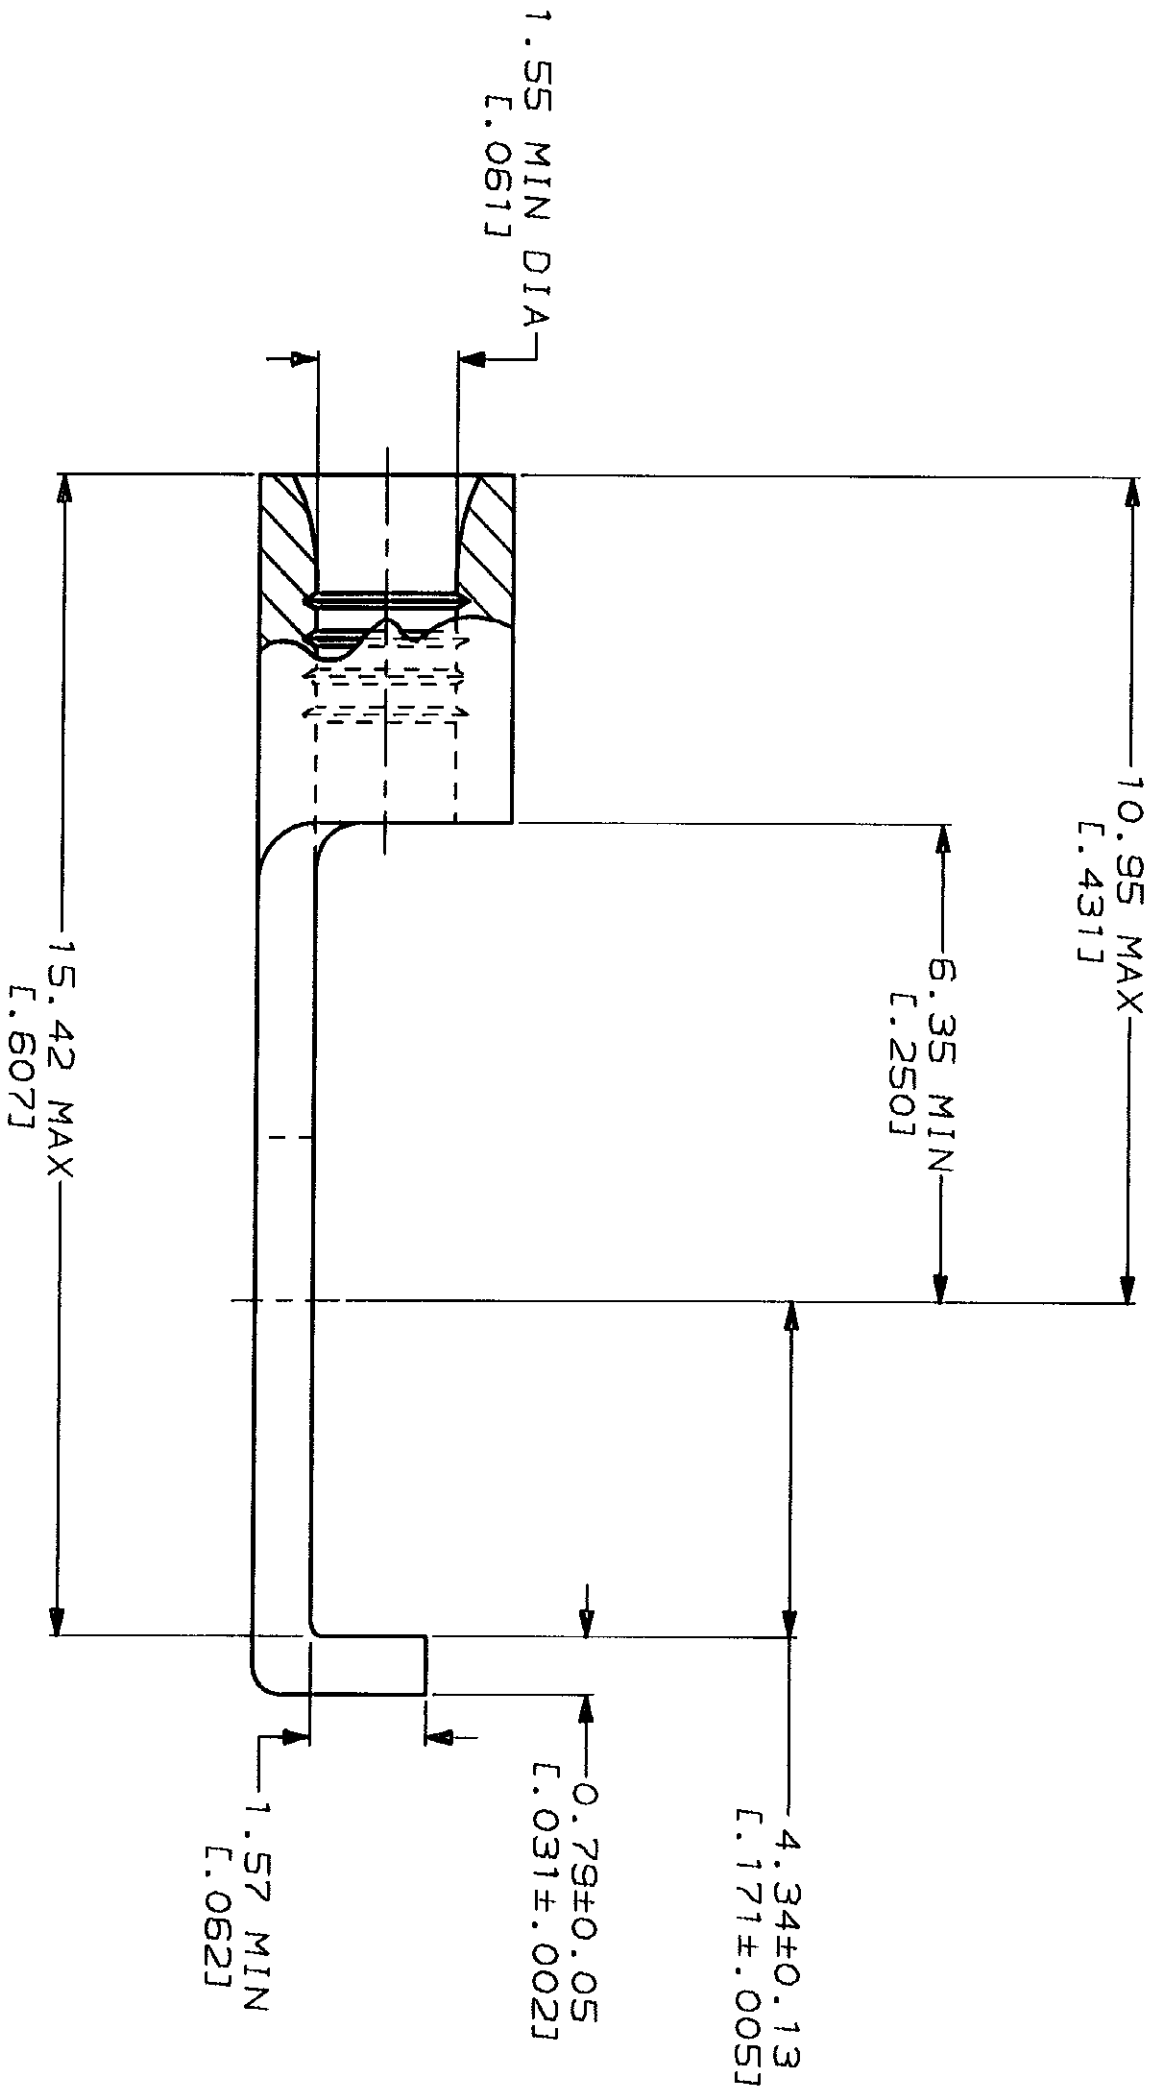

AMP INCORPORATED CUSTOMER SERVICE SYSTEMS

FOR ADDITIONAL
PRODUCT INFORMATION OR
COPIES OF DRAWINGS
AND TECHNICAL DOCUMENTS
FOR APPLICATION
TOOLING INFORMATION
FOR ORDER ENTRY

MAX RECOMMENDED OPERATING
TEMPERATURE:
170°C MAX

VOLTAGE RATING:
NOT APPLICABLE

WIRE CROSS SECTIONAL AREA RANGE:
0.26-1.65mm² (509-3,260) CIR MILS
SOLID OR STRANDED

PRODUCT INFORMATION CENTER
1-800-522-6752

TOOLING ASSISTANCE CENTER
1-800-722-1111

1-800-526-5142

DO NOT SCALE PRINT.
UNLESS SPECIFIED
DIMENSIONS IN mm [INCHES]
TOLERANCES ON:
2 PLC DEC #
3 PLC DEC #
ANGLES

MATERIAL
COPPER PER
ASTM B-152
ANNEALED

FINISH
TIN PLATE
0.00254 [0.00100] MIN
THK PER MIL-T-10727

DR 4-8-93
TA BRINKMAN

CHK 4-8-93
DA PATTERSON

APPD 4-8-93
DE MILLER

APPD 4-8-93
JL MECKLEY

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

QUANTITY	PACKAGE TYPE	PART NO
100	LOOSE PIECE, BOX	8-323124-1
---	LOOSE PIECE	323124
NAME		
AMP Incorporated Harrisburg, PA 17105-3608		
TERMINAL, FLANGED SPADE, SOLISTRAND™		
SIZE	CAGE CODE	DRAWING NO
00779	00779	323124
SCALE 10:1		SHEET 1 OF 1

323124

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[8-323124-1](#)