


# TIGERCLAW™ SURFACE MOUNT SOCKET

(2.54 mm) .100" PITCH • SSM SERIES

8

Gbps

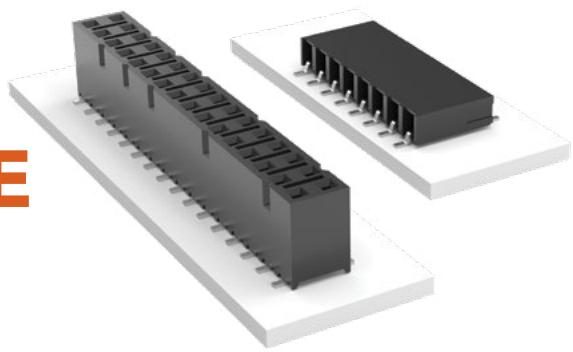

## SSM

### Mates:

TSW, MTSW,  
TST, TSS, ZST, ZSS,  
DW, EW, ZW, TSM,  
HMTSW, HTSW, TSSH,  
BST, HTSS, TLW, MTLW

## SPECIFICATIONS

### Insulator Material:

Black Liquid Crystal Polymer

### Contact Material:

Phosphor Bronze

### Plating:

Au or Sn over

50  $\mu$ " (1.27  $\mu$ m) Ni

### Current Rating (SSM/TSW):

5.2 A per pin

(2 pins powered)

### Voltage Rating:

405 VAC / 572 VDC

### Operating Temp Range:

-55 °C to +125 °C with Gold

-55 °C to +105 °C with Tin

### Insertion Depth:

SV/DV = (4.34 mm) .171" to (7.24 mm) .285" or pass-through from top; (5.56 mm) .219" plus board thickness minimum from bottom;

SH/DH = (4.34 mm) .171" to (6.35 mm) .250"

## PROCESSING

### Lead-Free Solderable:

Yes

### -DH Coplanarity:

Less than 28 positions

(0.15 mm) .006" max\*

More than 27 positions

(0.20 mm) .008" max\*

### -SH, -SV, -DV Coplanarity:

(0.15 mm) .006" max\*

\*(.004" stencil solution may be available; contact [ipg@samtec.com](mailto:ipg@samtec.com))

## ALSO AVAILABLE

MOQ Required


Alignment pin



### Notes:

Severe Environment  
Testing qualified; aligns  
with MIL-DTL-55302.  
Visit [samtec.com/set](http://samtec.com/set)

Some sizes, styles and  
options are non-standard,  
non-returnable.

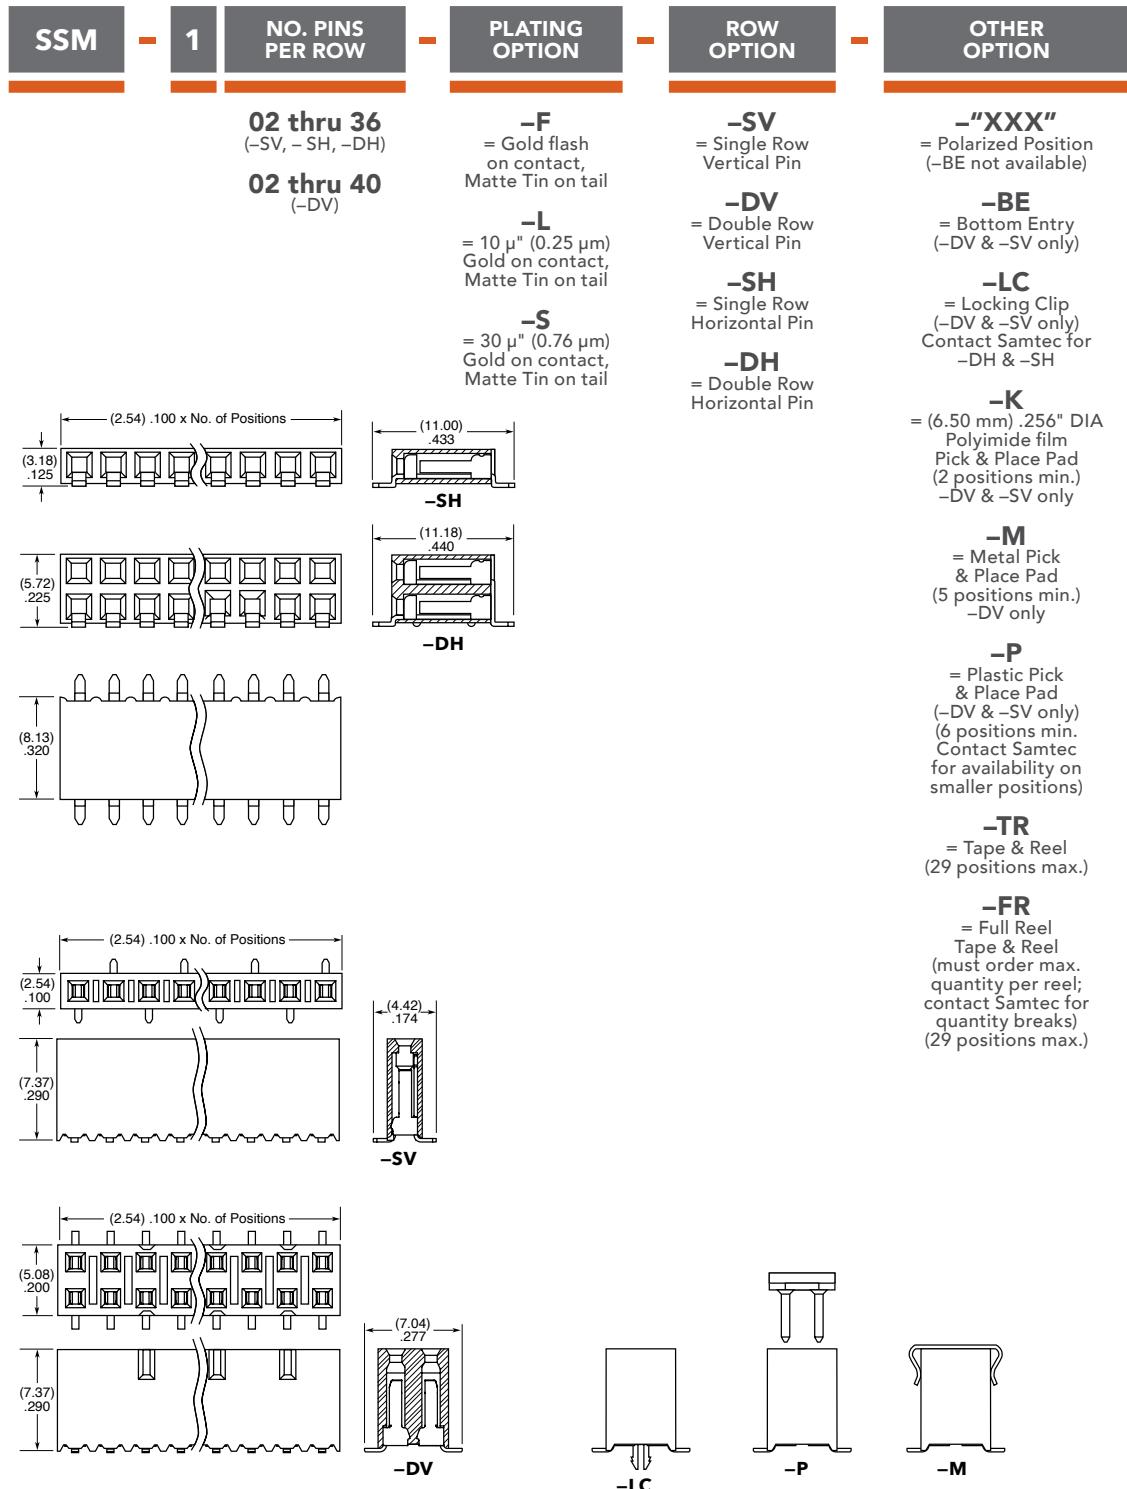

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Samtec](#):

[SSM-112-L-DV-TR-P](#) [SSM-17-S-DH](#)