
TE CONNECTIVITY (TE) RESERVES THE RIGHT TO CHANGE THIS DRAWING AT ANYTIME. USERS SHOULD EVALUATE THE SUITABILITY OF THE PRODUCT FOR THEIR APPLICATION.

REVISIONS								
LTR	DESCRIPTION	DATE	APPROVED					
О	REVISED PER ECO-12-021589	12/11/2012	G.WELLS					
Ε	REVISED PER ECO-15-018009	12/11/2015	I.MYONG					

## SCOPE:

THIS SPECIFICATION PROVIDES A DESCRIPTION OF HEAT-TO-RECOVER METAL RINGS FOR TERMINATING BRAIDED SHIELD ONTO ADAPTORS DESIGNED FOR THAT PURPOSE.

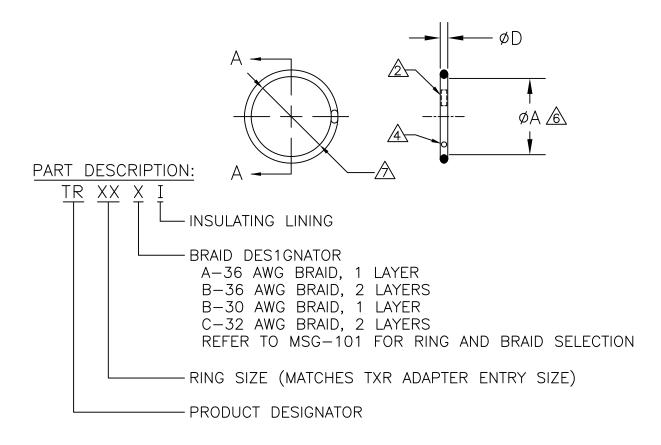

NOTES: UNLESS OTHERWISE SPECIFIED.

MATERIAL: NICKEL/TITANIUM HEAT-TO-RECOVER SHAP MEMORY ALLOY.

THE OUTSIDE SURFACE OF THE RING IS MARKED WITH TWO STRIPES OF THERMOCHROMIC PAIN WHICH CHANGE COLOR WHEN THE SPPROPRIATE INSTALLATION TEMPERATURE IS REACHED.

- 3. "AI" RINGS ARE IDENTIFIED BY THE ABSENCE OF A RED OR BLUE DOT. REFER TO NOTE 4 BELOW.
- $\triangle$  "BI" RINGS ARE MARKED WITH A RED DOT. "CI" RINGS ARE MARKED WITH A BLUE DOT.
- 5. REFER TO MIP-101 FOR INSTALATION PROCEDURE AND PERFORMANCE REQUIREMENT.
- AVERAGE OF MEASUREMENTS TAKEN AT 3 POINTS, EQUALLY SPACED ON WELD AND OFF WELD.
- $ilde{eta}$  shape of the ring to be mostly circular. Certain sizes (larger) may have multiple sides.

© 2015 TE CONNECTIVITY LTD. FAMILY OF COMPANIES. ALL RIGHTS RESERVED TE CONNECTIVITY AND TE CONNECTIVITY (LOGO) ARE TRADEMARKS. OTHER LOGOS PRODUCT AND/OR COMPANY NAMES MAY BE TRADEMARKS OF THEIR RESPECTIVE OWNERS.

Raychem Adapters CUSTOMER DRAWING

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE NOT APPLIED.	DRAWN DATE E. GOLDY 05-17	_93 TE TE Connectivity
DECIMAL TOLERANCES	REDRAWN DATE T. NGUYEN 05-17	
.XXX ± [ mm] .XX ± [ mm] .X ± [ mm]	T. NGUYEN 05-17 APPROVED DATE I. MYONG 12-08 CAD FILE: TR.dwg	TITLE
ANGLE TOLERANCE .X ±	THIRD ANGLE PROJECTION	SIZE

DADT	ØΑ						
PART DESCRIPTION	MIN AS SUPPLIED		MAX FREE RECOVERED		ØD		
TR04AI	.397	[10.08]	.379	[9.63]	.073±.005	[1.85±.13]	
TR04BI	.416	[10.57]	.398	[10.11]	.073±.005	[1.85±.13]	
TR05AI	.460	[11.68]	.440	[11.18]	.073±.005	[1.85±.13]	
TR05BI	.479	[12.17]	.458	[11.63]	.073±.005	[1.85±.13]	
TR06AI	.523	[13,28]	.499	[12.68]	.073±.005	[1.85±.13]	
TR06BI	.548	[13,92]	.523	[13.28]	.073±.005	[1.85±.13]	
TR07AI	.586	[14.88]	.559	[14.20]	.073±.005	[1.85±.13]	
TR07BI	.606	[15.39]	.578	[14.68]	.073±.005	[1.85±.13]	
TR08AI	.650	[16.51]	.620	[15.75]	.073±.005	[1.85±.13]	
TR08BI	.670	[17.02]	.639	[16.23]	.073±.005	[1.85±.13]	
TR10AI	.782	[19,86]	.744	[18.90]	.073±.005	[1.85±.13]	
TR10BI	.802	[20.37]	.763	[19.38]	.073±.005	[1.85±.13]	
TR10CI	.830	[21.08]	.791	[20.09]	.073±.005	[1.85±.13]	
TR12AI	.912	[23.17]	.867	[22.02]	.073±.005	[1.85±.13]	
TR12BI	.931	[23,65]	.886	[22.50]	.073±.005	[1.85±.13]	
TR12CI	.960	[24.38]	.912	[23.17]	.073±.005	[1.85±.13]	
TR14AI	1.040	[26,42]	.988	[25.10]	.073±.005	[1.85±.13]	
TR14BI	1.060	[26,92]	1.007	[25.58]	.073±.005	[1.85±.13]	
TR14CI	1.089	[27.66]	1.033	[26.24]	.073±.005	[1.85±.13]	
TR16AI	1.171	[29,74]	1.111	[28.22]	.073±.005	[1.85±.13]	
TR16BI	1.191	[30,25]	1.129	[28.68]	.073±.005	[1.85±.13]	
TR16CI	1.216	[30,89]	1.154	[29,31]	.073±.005	[1.85±.13]	
TR18AI	1.301	[33.05]	1.234	[31.34]	.073±.005	[1.85±.13]	
TR18BI	1.320	[33,53]	1.252	[31.80]	.073±.005	[1.85±.13]	
TR20AI	1,430	[36,32]	1,357	[34,47]	.073±.005	[1.85±.13]	
TR20BI	1.450	[36,83]	1,376	[34.95]	.073±.005	[1.85±.13]	
TR22AI	1.543	[39.19]	1,463	[37.16]	.084±.005	[2.13±.13]	
TR22BI	1.561	[39.65]	1.481	[37.62]	.084±.005	[2.13±.13]	
TR24AI	1.673	[42.49]	1.587	[40.31]	.084±.005	[2.13±.13]	
TR24BI	1.691	[42,95]	1,605	[40.77]	.084±.005	[2.13±.18]	
TR28AI	1.932	[49.07]	1,838	[46.68]	.084±.005	[2.13±.13]	
TR28BI	1.950	[49.53]	1.858	[47.19]	.084±.005	[2.13±.13]	

© 2015 TE CONNECTIVITY LTD. FAMILY OF COMPANIES. ALL RIGHTS RESERVED TE CONNECTIVITY AND TE CONNECTIVITY (LOGO) ARE TRADEMARKS. OTHER LOGOS PRODUCT AND/OR COMPANY NAMES MAY BE TRADEMARKS OF THEIR RESPECTIVE OWNERS.

Raychem Adapters CUSTOMER DRAWING

REDRAWN	DATE	SIZE	CAGE CODE:	DWG. NO.		REV:
T. NGUYEN	12-07-2015	A	06090	TR		l F
CAD FILE:		, ,	00000	111		
TR-CD		SCA	ALE: NONE		SHEET :	2 OF 2

## **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TE Connectivity: