


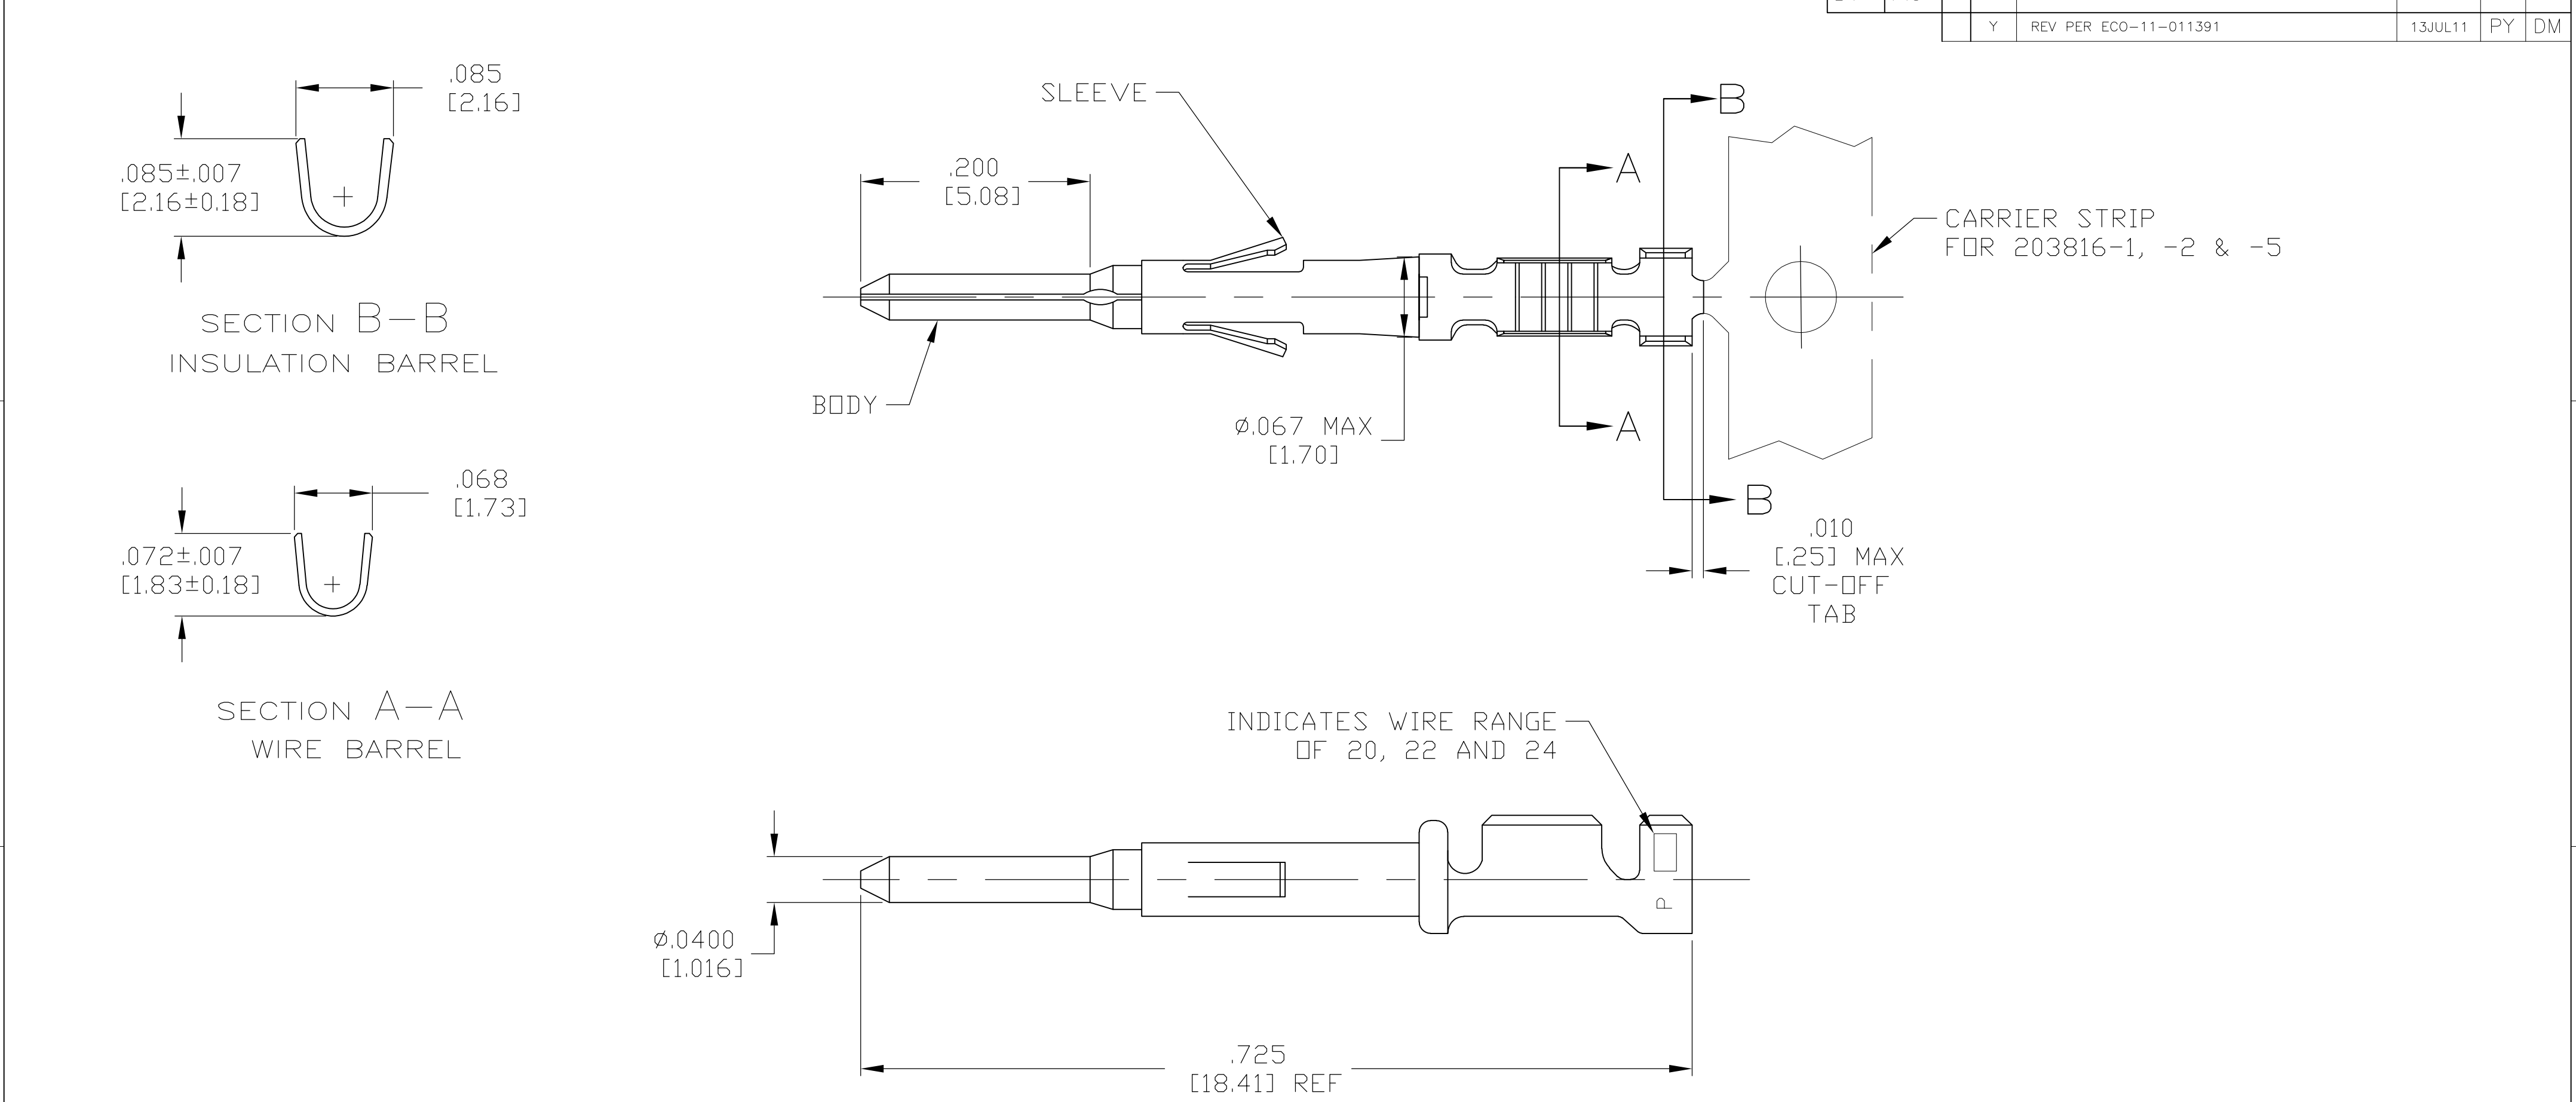

1	MATERIAL:	BODY: BRASS PER ASTM-B-19			LOOSE PIECE	4	1	203816-6
		SLEEVE: STAINLESS STEEL PER ASTM-A-240.			ON STRIP	4	1	203816-5
					LOOSE PIECE	3	1	203816-4
					LOOSE PIECE	2	1	203816-3
					ON STRIP	3	1	203816-2
2	FINISH:	.000030 MIN THK GOLD PER ASTM-B-488			ON STRIP	3	1	203816-2
		OVER .000050 MIN THK NICKEL PER AMS-QQ-N-290.			ON STRIP	2	1	203816-1
3	FINISH:	SELECTIVE .000030 MIN THK GOLD PER ASTM-B-488			REMARKS	FINISH	MATERIAL	PART NO.
		OVER .000050 MIN THK NICKEL PER AMS-QQ-N-290.						
4	FINISH:	.000150 MIN TIN OVER NICKEL FLASH.						
		CAUTION: USE OF TIN PLATED TERMINALS IN CERTAIN ENVIRONMENT MAY CAUSE NON-CONFORMANCE TO TYCO PRODUCT SPECIFICATION 108-10015.						
5	WIRE RANGE:	20, 22 & 24 AWG						
	INSULATION RANGE:	.062 MAX.						
	HAND CRIMPING TOOL:	TYCO P/N 90260-1						
	EXTRACTION TOOL:	TYCO P/N 91038-3						
	INSERTION TOOL:	TYCO P/N 91042-1						
6	PART NUMBERS	203816-7 THRU 1-203816-6 ARE OBSOLETE.						

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[203816-5](#)