



Apr.1.2020 Copyright 2020 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.


COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
△				..	△				..
△				..	△				..
△				..	△				..

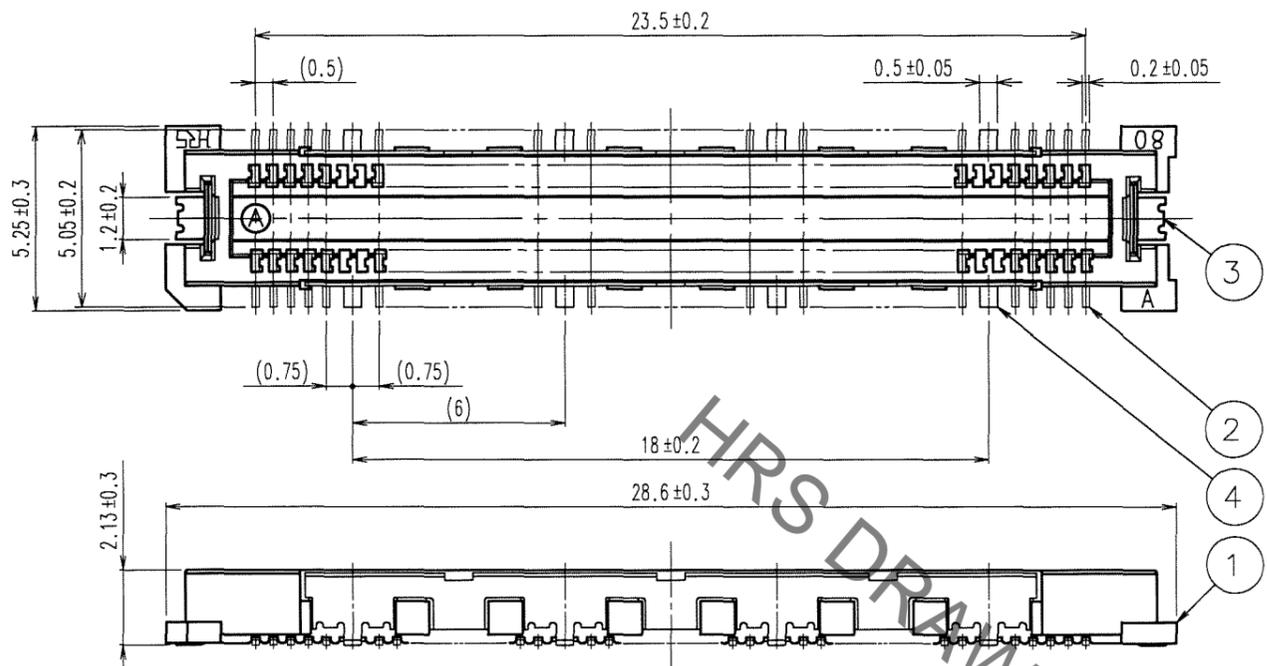


SIGNAL PORTION CROSS SECTION (10:1)

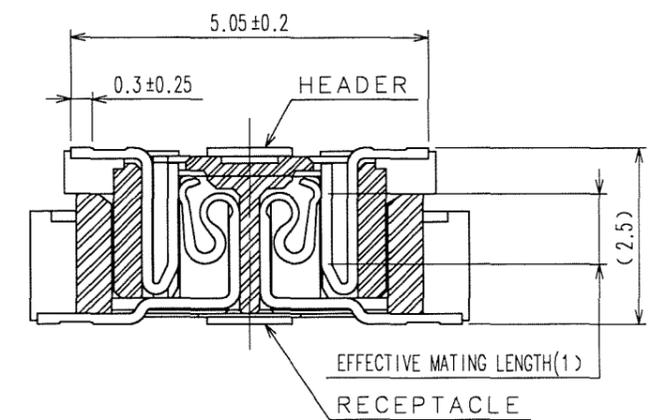

RECOMMENDED LAND PATTERN DIMENSION OF PCB

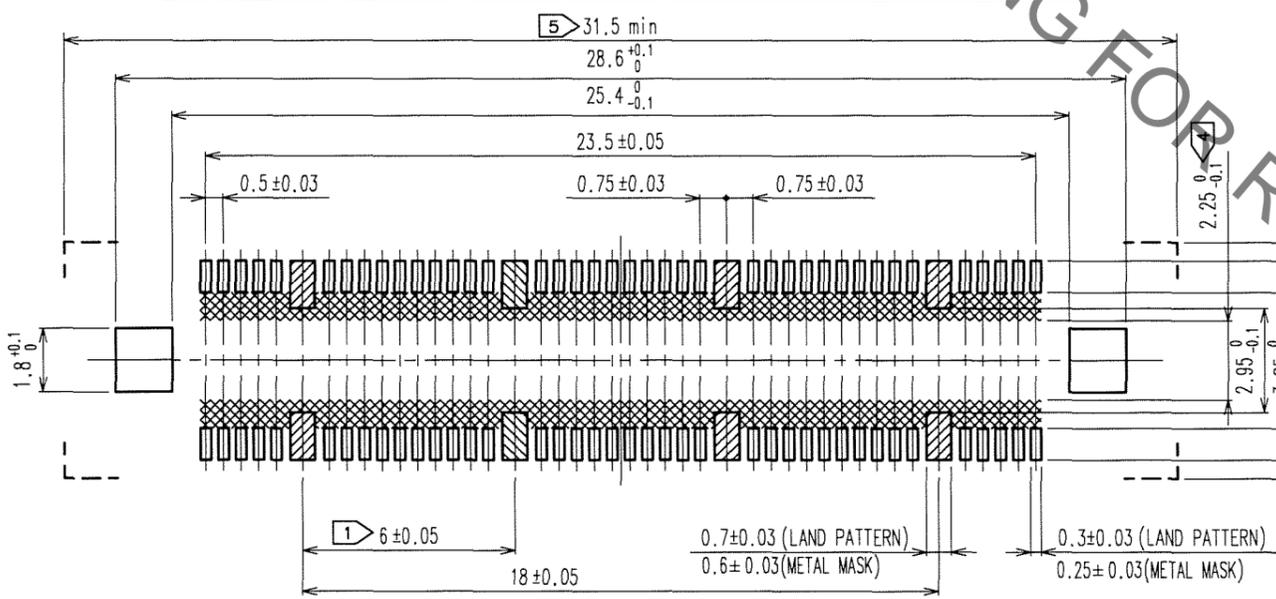

GROUND PORTION CROSS SECTION (10:1)

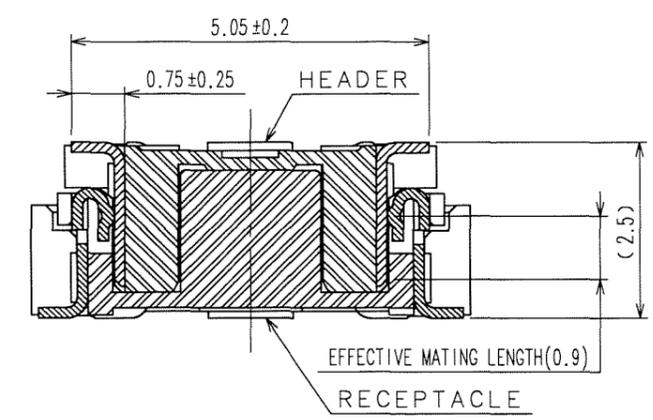

- NOTES
- 8 HATCHED PARTS:GROUND CIRCUIT.
  - SMT LEAD-COPLANARITY:0.1 MAX.
  - THIS PRODUCT HAS NO POLARITY TO PATTERN FOR MOUNTING.
  - MAKE SURE WIDTH OF PATTERN IS WITHIN THAT OF LAND ,OR LEAD MAY TOUCH PATTERN.(THIS APPLIES TO HATCHED AREA.)
  - DO NOT MOUNT OTHER DEVICES ONTO AREA ,OR MATING PAIR CANNOT BE MATED.
  - THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

3, 4	PHOSPHOR BRONZE	TIN-PLATING	2	COPPER ALLOY	CONTACT AREA:GOLD 0.1 μm min. LEAD AREA:GOLD FLASH UNDER PLATING:NICKEL 1 μm min.
1	LCP	BEIGE UL94V-0			
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
CODE NO. (OLD) CL		DRAWN S.KAMIGA	DESIGNED <i>H. Nakamura</i>	CHECKED <i>J.-L. Ogawa</i>	APPROVED <i>H. Okawa</i>
		06.05.13	06.05.13	06.05.13	06.05.13
DRAWING NO. EDC3-152602-25			PART NO. FX11B-80P/8-SV(71)		
SCALE 5 : 1			CODE NO. CL573-0513-6-71		
UNITS mm			HIROSE ELECTRIC CO.,LTD.		

TO  
PCK