





Leiterplatten-Layout Vorschlag für SMT
PCB-Layout Proposal for SMT





Anforderungsstufe 1
Performance Level 1

Kontaktbereich vergoldet
Mating Area gold plating

Anschlussbereich verzinkt 4-6 µm
Terminal Area 4-6 µm tin plating

Koplanarität der Anschlüsse ≤ 0.1 mm
Coplanarity Area of Termination ≤ 0.1 mm

Verpackt in Gurtverpackung
Tape on Reel Packaging
Verpackungseinheit: 440 Stück
Packaging unit: 440 pcs

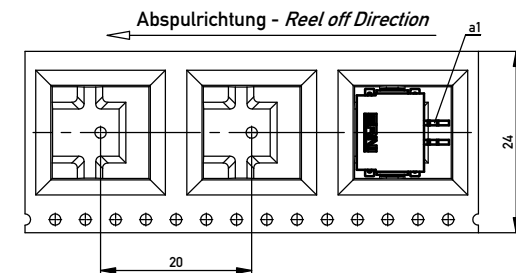

454189		weiß white	0.3	2.1	0.6	1.8	Codierung wie Variante schwarz Encoding such variant black
234835		rot red	2.1	0.3	2.4	0	
234834		grün green	1.5	0.9	1.8	0.6	
234833		blau blue	0.9	1.5	1.2	1.2	
234832		schwarz black	0.3	2.1	0.6	1.8	
Ident-Nr. part-no.	Codierung coding	Farbe color	A	B	C	D	Bemerkung note

Copyright by ERNI GmbH
Proprietary notice pursuant to ISO 16093 to be observed

Information:			Tolerances		Scale 3:1	
All rights reserved. Only for Information. To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.					Designation M 2.54 SRC-A, 2-polig	
			All Dimensions in mm			
			Subject to modification without prior notice. Drawing will not be updated.		224918	
g		15.04.2013		 www.ERNI.com		
Index		Date				
				Class SRC-A		
				I A2		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[ERNI Electronics:](#)

[234832](#) [234833](#) [234835](#) [234834](#)