

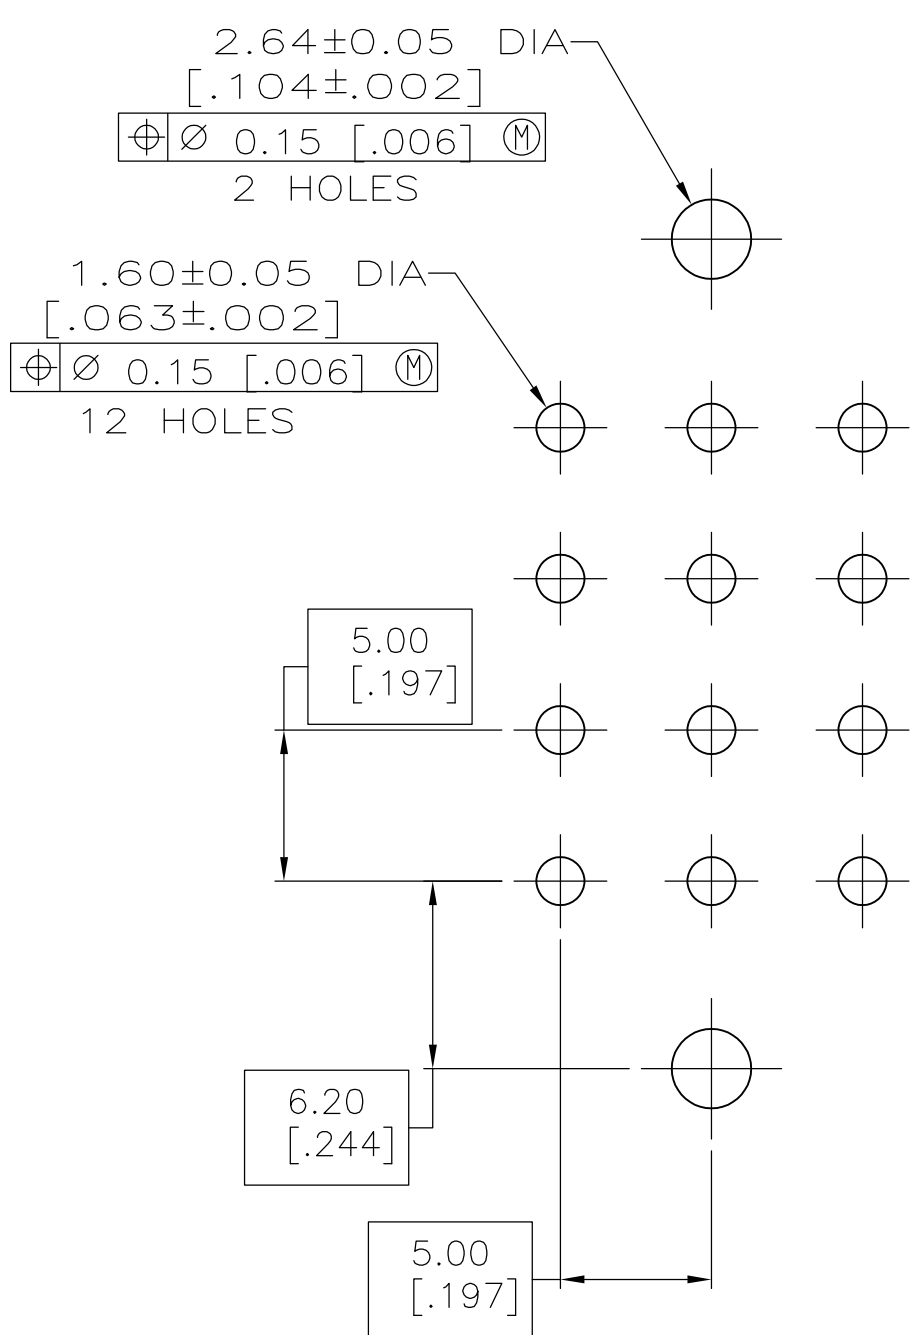
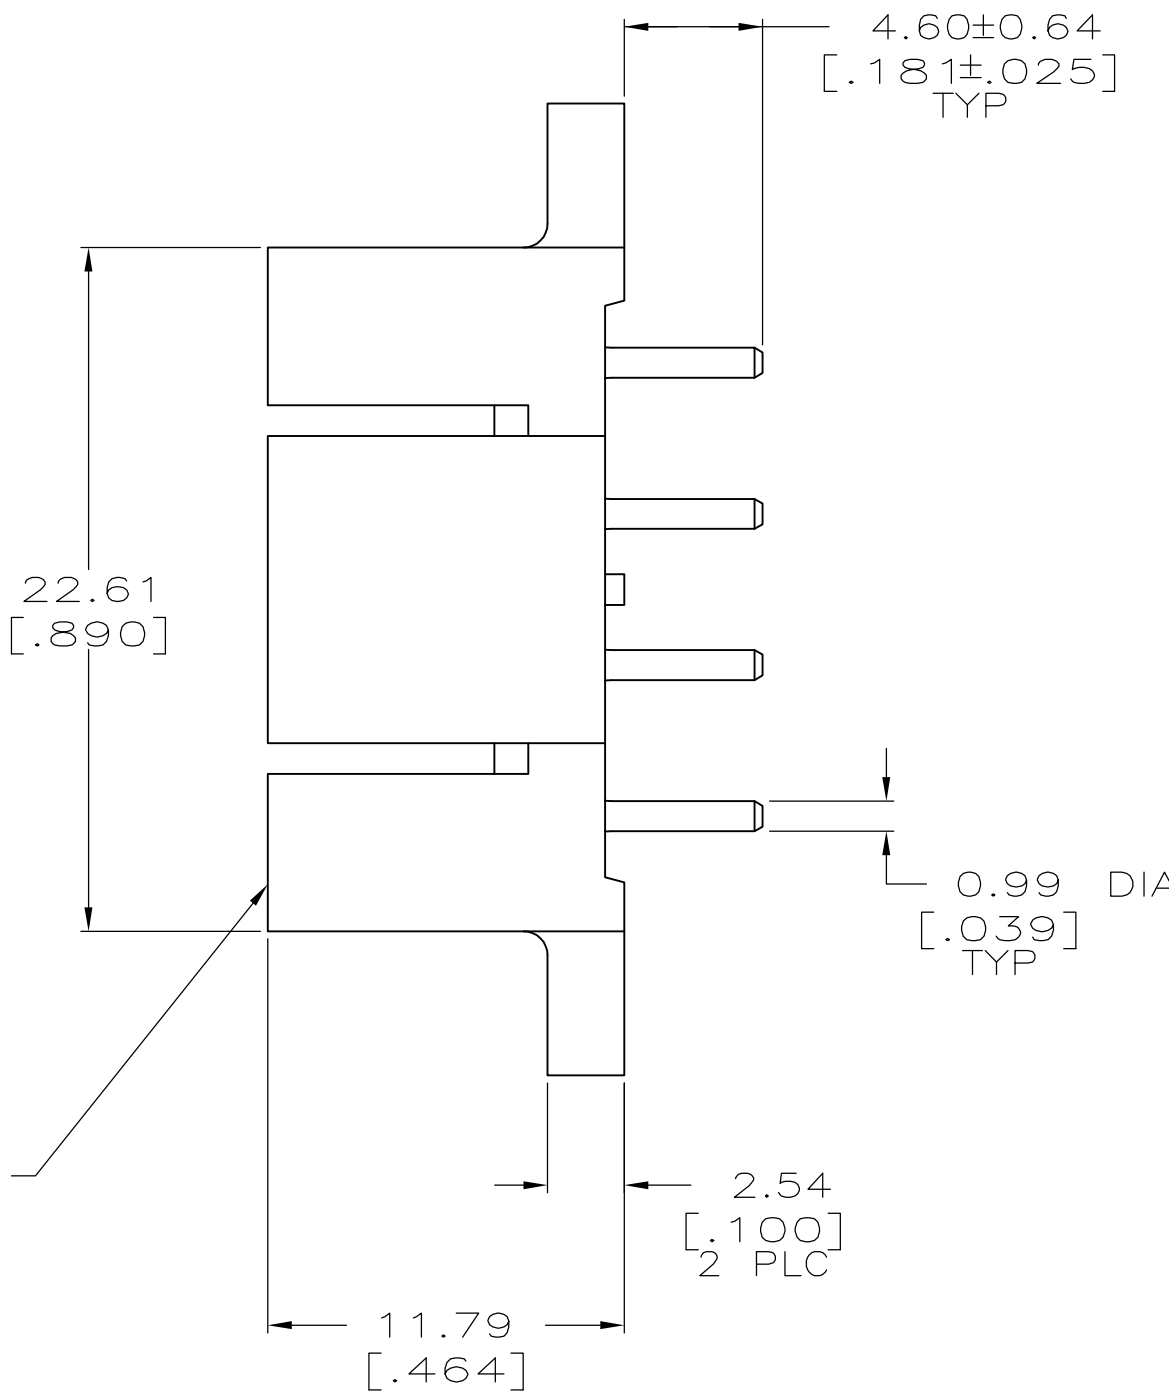


LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN
FT	0		S2	REVISED PER ECO-11-004820	11MAR11	RK
						APVD
						HMR

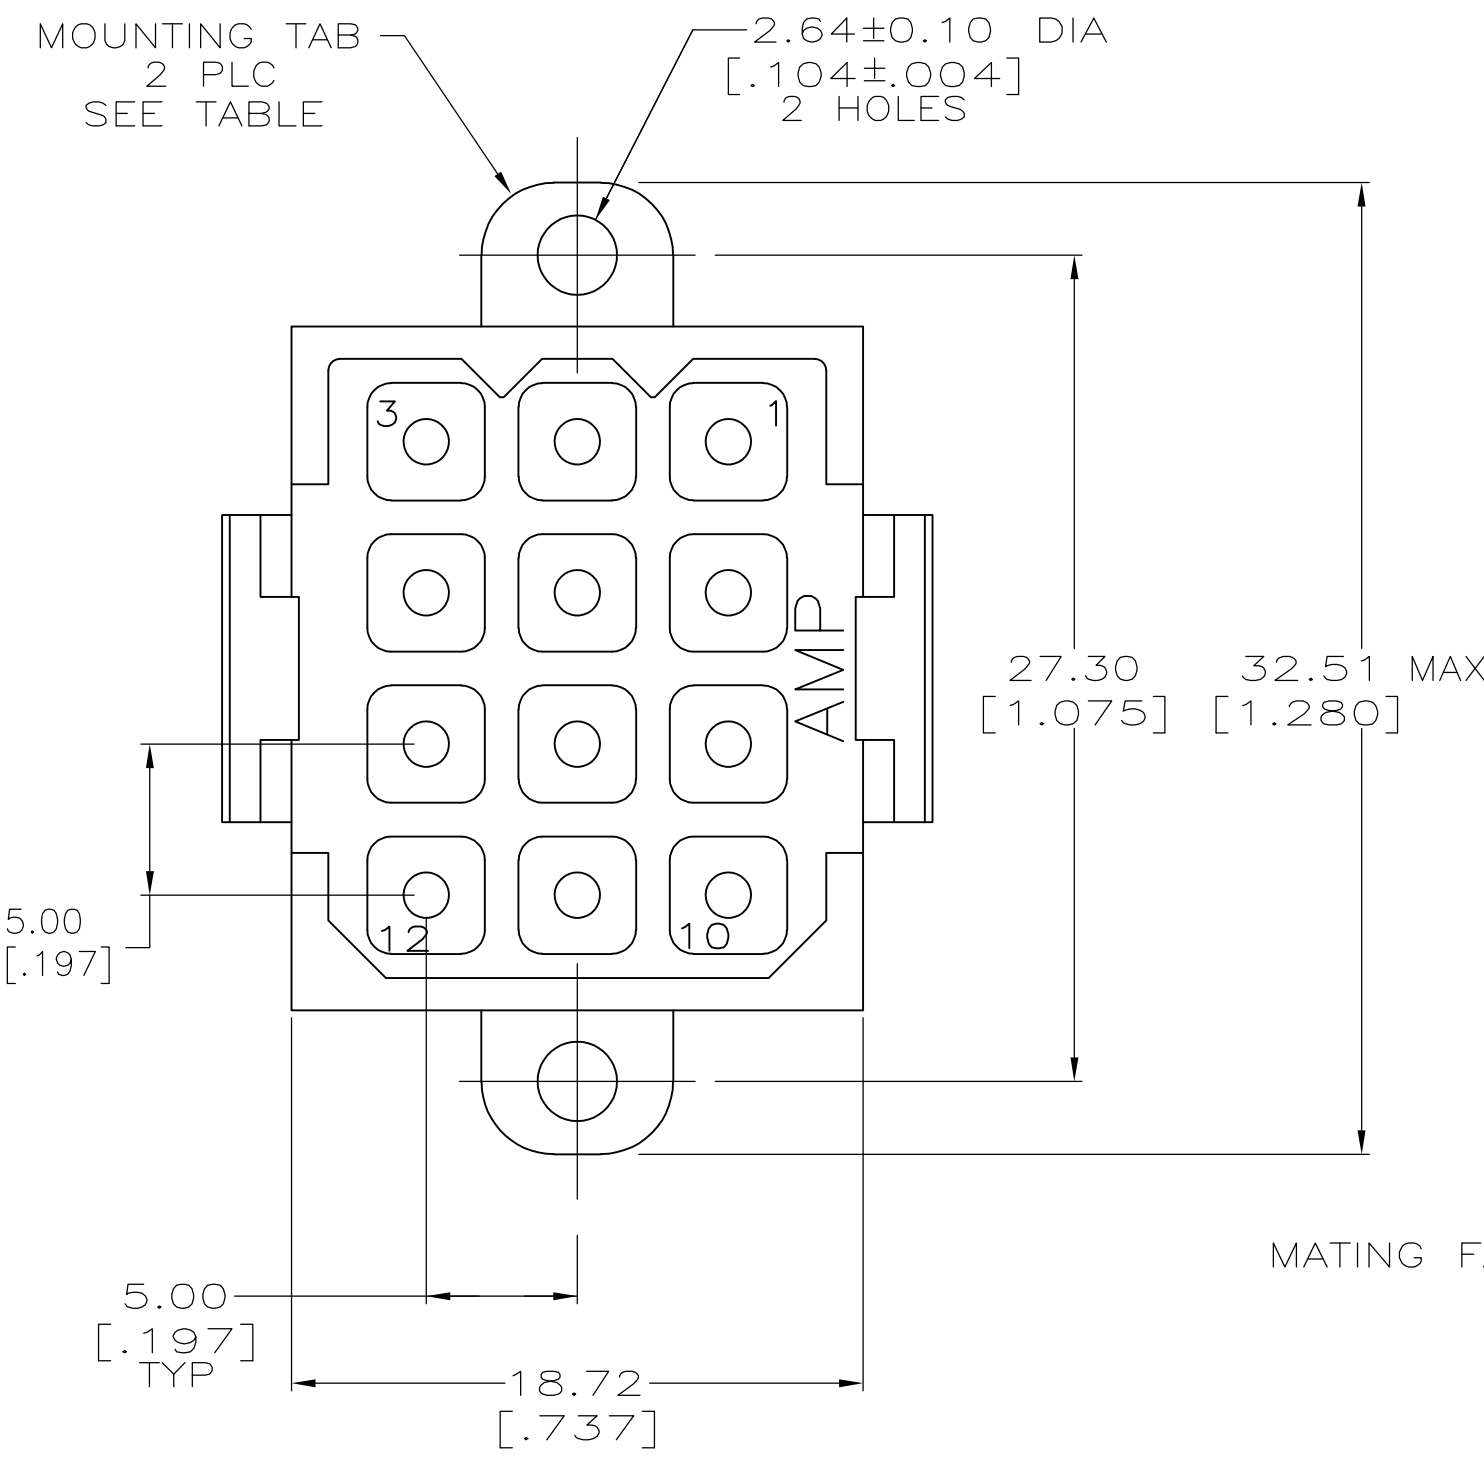

RECOMMENDED PC BOARD LAYOUT

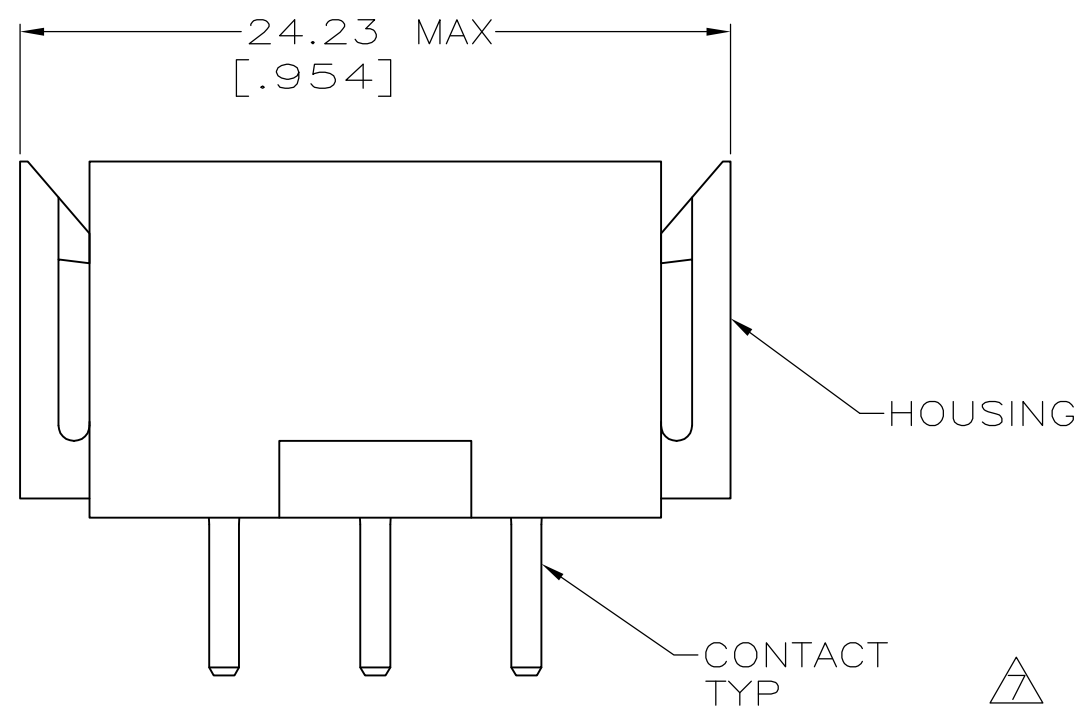

- 1 NYLON, UL 94V-0 RATED, RED.
- 2 BRASS PER ASTM B36.
- 3 3.81um [.000150] MIN TIN OVER 2.54um [.000100] MIN COPPER.
- 4 0.76um [.000030] MIN GOLD FOR A LENGTH OF 5.08 [.200] FROM MATING END, 3.81um [.000150] MIN TIN-LEAD FOR A LENGTH OF 4.83 [.190] MIN FROM OPPOSITE END, BOTH OVER 1.27um [.000050] MIN NICKEL.
- 5 SELECTIVELY LOADED CONTACTS IN POSITIONS 1 THRU 5, 7 THRU 12.
- 6 3.81um [.000150] MIN TIN OVER 2.54um [.000100] MIN COPPER.

- 7 0.76um [.000030] MIN GOLD FOR A LENGTH OF 5.08 [.200] FROM MATING END, 3.81um [.000150] MIN TIN FOR A LENGTH OF 4.83 [.190] MIN FROM OPPOSITE END, BOTH OVER 1.27um [.000050] MIN NICKEL.
- 8 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

8 SUPERSEDED BY 1-207120-2

6	YES	5 1-207120-2
7	NO	1-207120-1
6	NO	1-207120-0
6	YES	207120-9
7	YES	207120-8
3	YES	5 207120-7
4	NO	207120-4
4	YES	207120-3
3	NO	207120-2
3	YES	207120-1
CONTACT FINISH		PART NUMBER
MOUNTING TABS		
PART NUMBER		

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm [INCHES]

MATERIAL

HOUSING: 1

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ± -
1 PLC ± -
2 PLC ± 0.25 [.010]
3 PLC ± -
4 PLC ± -
ANGLES ± -
FINISH

CONTACT: SEE TABLE

DWN

L.SIPE

CHK

R.STONE

APVD

-

PRODUCT SPEC

108-10033

APPLICATION SPEC

-

WEIGHT

-

CUSTOMER DRAWING

03/11/92

3-17-92

NAME

PIN HEADER ASSEMBLY,
12 POSITION, METRIMATE

SIZE

A2

CAGE CODE

00779

DRAWING NO

C=207120

RESTRICTED TO

-

SCALE

4:1

SHEET

1 OF 1

REV

S2

TE Connectivity

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[207120-1](#)