

PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION

**Part Number:** [0010897621](#)  
**Status:** **Active**  
**Overview:** [C-Grid Connector Products](#)  
**Description:** 2.54mm Pitch C-Grid Breakaway Header, Dual Row, Vertical, High Temperature, 62 Circuits, Tin (Sn) Plating, 2.72mm PC Tail Length

**Documents:**

[3D Model](#) [Packaging Specification PK-70873-0353-001 \(PDF\)](#)  
[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)  
[Product Specification PS-70280-001 \(PDF\)](#)

**Agency Certification**


CSA LR19980  
UL E29179

**General**

Product Family PCB Headers  
Series [70280](#)  
3D Viewer Yes  
Application Board-to-Board, Signal, Wire-to-Board  
CURRENT-MAX-NUMERIC 3.0  
Overview [C-Grid Connector Products](#)  
PITCH-MATING-NUMERIC 2.54  
Product Name C-Grid  
UPC 800753978065

**Physical**

Breakaway Yes  
Circuits (Loaded) 62  
Circuits (maximum) 62  
Color - Resin Black  
Durability (mating cycles max) 25  
First Mate / Last Break No  
Flammability 94V-0  
Glow-Wire Capable No  
Guide to Mating Part No  
Keying to Mating Part None  
Lock to Mating Part None  
Material - Metal Copper Alloy  
Material - Plating Mating Tin  
Material - Plating Termination Tin  
Net Weight 4.524/g  
Number of Rows 2  
Orientation Vertical  
PC Tail Length 2.79mm  
PCB Locator No  
PCB Retention None  
PCB Thickness - Recommended 1.60mm  
Packaging Type Bag  
Pitch - Mating Interface 2.54mm  
Plating min - Mating 3.810µm  
Plating min - Termination 3.810µm  
Polarized to Mating Part No  
Polarized to PCB No  
Shrouded No  
Stackable Yes  
Temperature Range - Operating -40° to +105°C

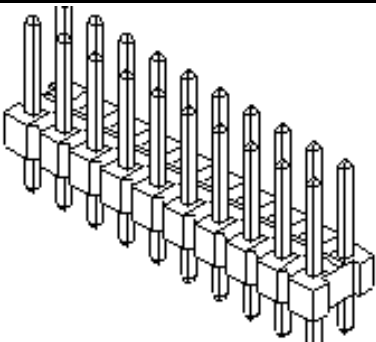

Series image - Reference only

**EU ELV**

**Not Relevant**

**EU RoHS**

**Compliant**

**China RoHS**

**REACH SVHC**

Not Contained Per -  
ED/71/2019 (16 July  
2019)

**Halogen-Free**

**Status**

**Low-Halogen**

For more information, please visit [Contact US](#)

|                 |               |
|-----------------|---------------|
| China ROHS      | Green Image   |
| ELV             | Not Relevant  |
| RoHS Phthalates | Not Contained |

**Search Parts in this Series**

[70280 Series](#)

|                                                |                      |
|------------------------------------------------|----------------------|
| Termination Interface: Style                   | Through Hole         |
| <b>Electrical</b>                              |                      |
| Current - Maximum per Contact                  | 3.0A                 |
| Voltage - Maximum                              | 250V                 |
| <b>Solder Process Data</b>                     |                      |
| Duration at Max. Process Temperature (seconds) | 005                  |
| Lead-freeProcess Capability                    | WAVE                 |
| Max. Cycles at Max. Process Temperature        | 001                  |
| Process Temperature max. C                     | 245                  |
| <b>Material Info</b>                           |                      |
| Engineering Number                             | A-70280-0031         |
| <b>Reference - Drawing Numbers</b>             |                      |
| Packaging Specification                        | PK-70873-0353-001    |
| Product Specification                          | PS-70280-001         |
| Sales Drawing                                  | SDA-70280-0001-4000- |

This document was generated on 09/25/2019

PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Molex:

10-89-7621