



Raychem Circuit Protection Products Gas Discharge Tubes

Raychem GDTs (Gas Discharge Tubes) are placed in front of, and in parallel with, sensitive telecom equipment such as power lines, communication lines, signal lines and data transmission lines to help protect them from damage caused by transient surge voltages that may result from lightning strikes and equipment switching operations. These devices do not influence the signal in normal operation. However, in the event of an overvoltage surge, such as a lightning strike, the GDT switches to a low impedance state and diverts the energy away from the sensitive equipment.

Raychem GDTs offer a high level of surge protection, a broad voltage range, low capacitance, and many form factors including new surface mount devices, which makes them suitable for applications such as MDF (Main Distribution Frame) modules, high data-rate telecom applications (e.g. ADSL, VDSL), and surge protection on power lines. Their low capacitance also results in less signal distortion. When used in a coordinated circuit protection solution with PolySwitch devices, SiBar thyristor surge protection devices, and MOV (Metal Oxide Varistor) devices, they can help equipment manufacturers meet stringent safety regulatory standards.



Benefits

- Helps provide overvoltage fault protection against high energy surges
- Suitable for sensitive equipment due to impulse sparkover response
- Suitable for high-frequency applications
- Highly reliable performance
- **New surface-mount devices for automated manufacturing**

Features

- RoHS compliant
- Halogen free (refers to: $Br \leq 900\text{ppm}$, $Cl \leq 900\text{ppm}$, $Br+Cl \leq 1500\text{ppm}$)
- Wide range of voltages (75V-600V)
- Wide range of form factors (3mm, 5mm, 6mm, 7mm, 8mm diameter devices)
- Low capacitance and insertion loss
- Crowbar device with low arc voltage
- High accuracy spark-over voltages for high precision designs
- Devices tested per ITU K.12 recommendations
- Various lead configurations and surface-mount options
- Optional fail-short mechanism
- Non radioactive materials

Applications

- Telecommunications
 - MDF modules, xDSL equipment, RF system protection, antenna, base stations
- Industrial and Consumer electronics, such as
 - Power supplies, surge protectors, alarm systems, irrigation systems

Figure G1 Two electrode devices for ungrounded circuits

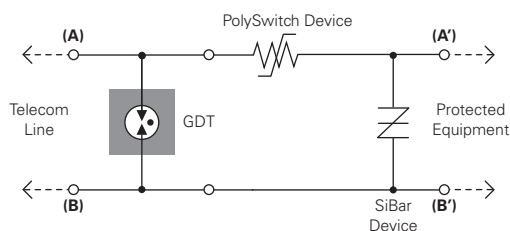


Figure G2 Three electrode devices for grounded circuits

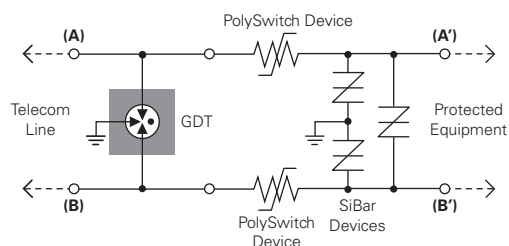


Table G1 Device Voltage Ratings

Part Number	DC Sparkover Voltage	Impulse Sparkover Voltage
	@ 100V/s ± 20% Tolerance	@ 1kV/μs
GTCX23-XXXM-R01	75*	600
	90	600
	140	600
	150	600
	200	700
	230	700
	300	900
	350	1000
	400	1000

* DCSO 60~105

Part Number	DC Sparkover Voltage	Impulse Sparkover Voltage		DC Holdover Voltage	On-State Voltage
	@ 100V/s ± 20% Tolerance	@ 100V/μs	@ 1kV/μs	Per ITU K.12	Nominal (@1A) (V)
GTCX25-XXXM-R02	75	450	550	<52	20
	90	450	550	<52	20
	140	500	600	<80	20
	150	500	600	<80	20
	200	600	700	<135	20
	230	600	700	<135	20
	250	600	700	<135	20
	260	700	800	<135	20
GTCX28-XXXM-R05	300	800	900	<150	20
GTCX28-XXXM-R20**	350	900	1000	<150	20
GTCX35-XXXM-R05	400	900	1000	<150	20
GTCX36-XXXM-R10	420	900	1000	<150	20
GTCX37-XXXM-R10	470	1050	1150	<150	20
GTCX38-XXXM-R10	500	1100	1200	<150	20
	550	1300	1400	<150	20
	600	1300	1400	<150	20

** GTCX28-XXXM-R20 parts only up to 230V

Table G2 Device Surge Rating, Capacitance, Insulation Resistance, and Agency Approval

Part Number	Impulse Discharge Current		Impulse Withstand Voltage	Capacitance	Insulation Resistance	UL Rating
	8x20μs 10 hits	8x20μs 300 hits	10x700μs 10 hits	@ 1MHz	@ 100V†	UL497B #E179610
GTCX23-XXXM-R01	1kA	100A	4kV	<0.5pF	1,000 (MΩ)	All Devices

Part Number	Impulse Discharge Current	Impulse Life	AC Discharge Current (1sec duration; 10 hits)	Capacitance	Insulation Resistance	UL Rating
	8x20μs 10 hits	10x100μs 300 hits	@ 50 Hz	@ 1MHz	@ 100V†	UL497B #E179610
GTCX25-XXXM-R02	2.5kA	100A	2.5Arms	<1pF	10,000 (MΩ)	All Devices
GTCX26-XXXM-R05	5kA	100A	5Arms	<1pF	10,000 (MΩ)	All Devices
GTCX28-XXXM-R05	5kA	100A	5Arms	<1pF	10,000 (MΩ)	All Devices
GTCX28-XXXM-R10	10kA	100A	10Arms	<1pF*	10,000 (MΩ)	All Devices
GTCX28-XXXM-R20	20kA	100A	20Arms	<1.5pF	10,000 (MΩ)	All Devices
GTCX35-XXXM-R05	5kA	100A	5Arms	<1pF	10,000 (MΩ)	All Devices
GTCX36-XXXM-R10	10kA	200A	10Arms	<1pF	10,000 (MΩ)	All Devices
GTCX37-XXXM-R10	10kA	200A	10Arms	<1pF	10,000 (MΩ)	All Devices
GTCX38-XXXM-R10	10kA	200A	10Arms	<1pF	10,000 (MΩ)	All Devices

* <1.2pF for 75V and 90V devices.

† Insulation resistance measured at 50V for devices less than 90V.

Insulation resistance measured at 250V for devices more than 500V.

Figure G3 Two Electrode 3mm Product Dimensions



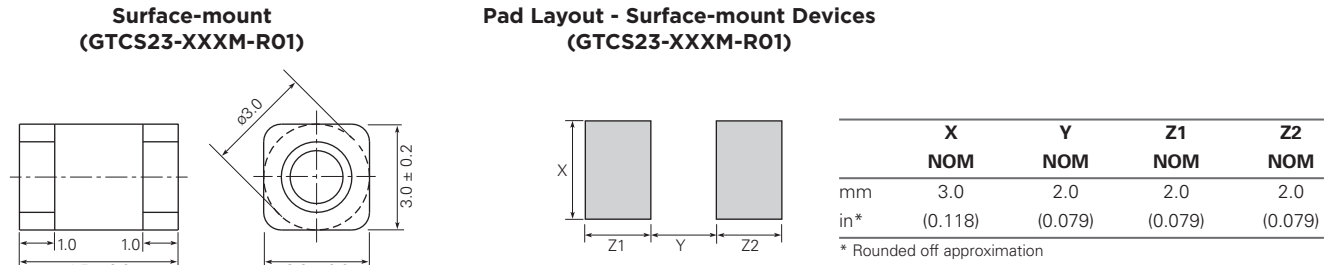


Figure G4 Two Electrode 5mm Product Dimensions

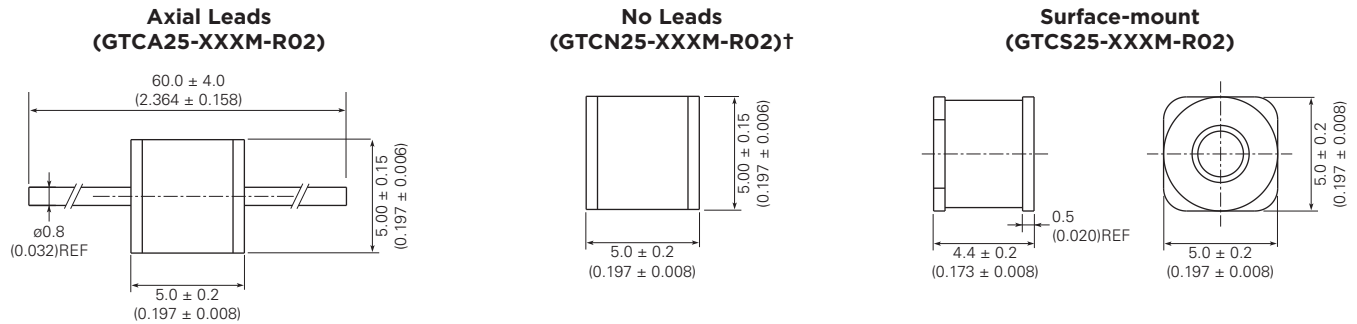


Pad Layout - Surface-mount Devices (GTCS25-XXXM-R02)

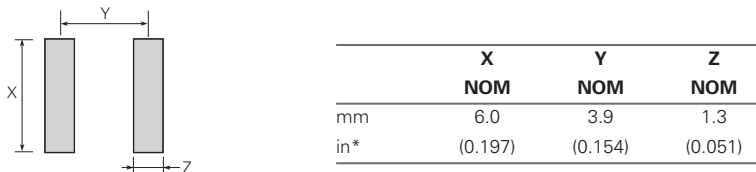


* Rounded off approximation

† Parts with no leads are non-solderable; meant for insertion into magazine clips

Figure G5 Two Electrode 6mm Product Dimensions

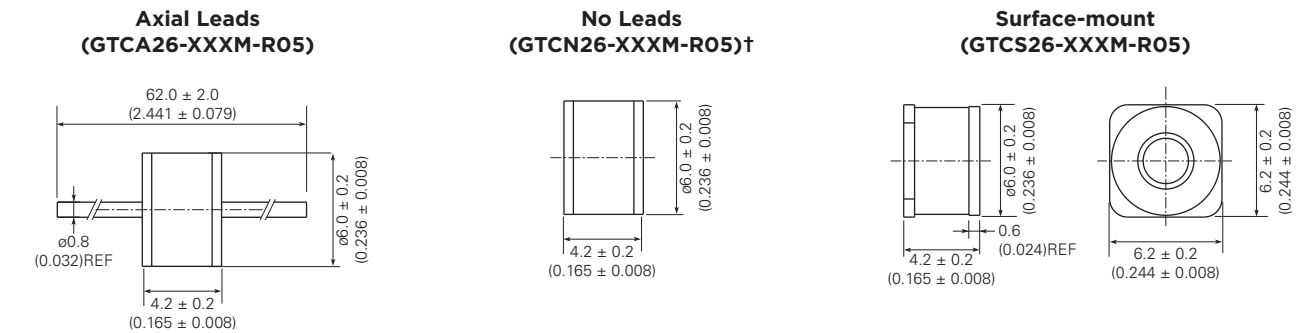

Pad Layout - Surface-mount Devices (GTCS26-XXXM-R05)

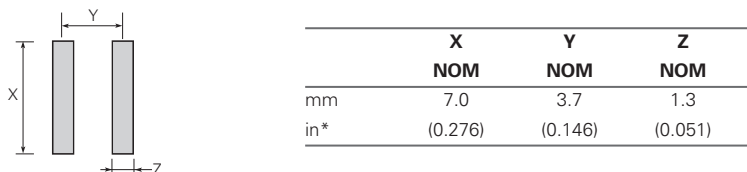


* Rounded off approximation


† Parts with no leads are non-solderable; meant for insertion into magazine clips

Figure G6 Two Electrode 8mm Product Dimensions


**Axial Leads
(GTCA28-XXXM-R05, R10 & R20)**




**No Leads
(GTCN28-XXXM-R05, R10 & R20)†**



**Surface-mount
(GTCS28-XXXM-R05, R10 & R20)**

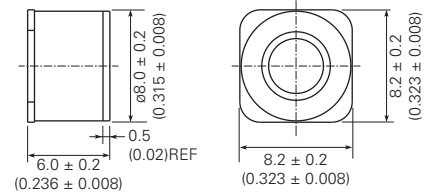

**Pad Layout - Surface-mount Devices
(GTCS28-XXXM-R05, R10 & R20)**




	X	Y	Z
	NOM	NOM	NOM
mm	9.0	5.6	1.2
in*	(0.354)	(0.22)	(0.047)

* Rounded off approximation


† Parts with no leads are non-solderable; meant for insertion into magazine clips

Figure G7 Three Electrode 5mm Product Dimensions


**Axial Leaded
(GTCA35-XXXM-R05)**

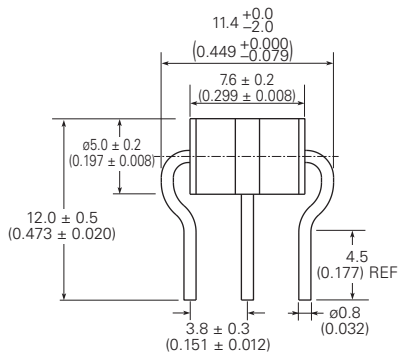


**Axial Leaded with-FT
(GTCA35-XXXM-R05-FT)**

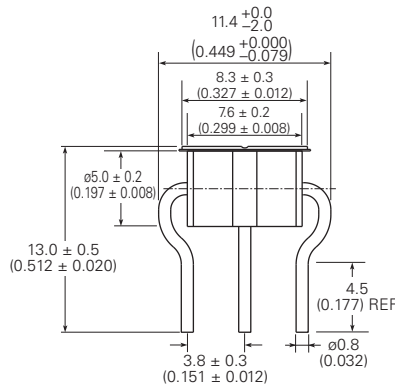


**No Leads
(GTCN35-XXXM-R05)†**




**No Leads with-FT
(GTCN35-XXXM-R05-FT)†**




**Surface-mount
(GTCS35-XXXM-R05)**

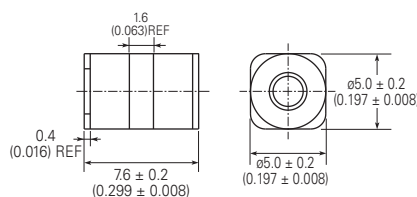

**T Leaded
(GTCT35-XXXM-R05)**

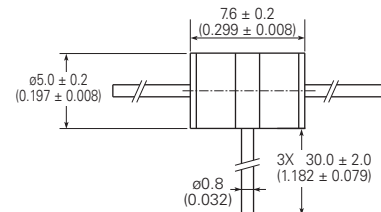

**Pad Layout - Surface-mount Devices
(GTCS35-XXXM-R05)**




	X	Y1	Y2	Z1	Z2
	NOM	NOM	NOM	NOM	NOM
mm	6.0	3.6	3.6	2.5	1.3
in*	(0.236)	(0.142)	(0.142)	(0.098)	(0.051)

* Rounded off approximation


† Parts with no leads are non-solderable; meant for insertion into magazine clips

Figure G8 Three Electrode 6mm Product Dimensions

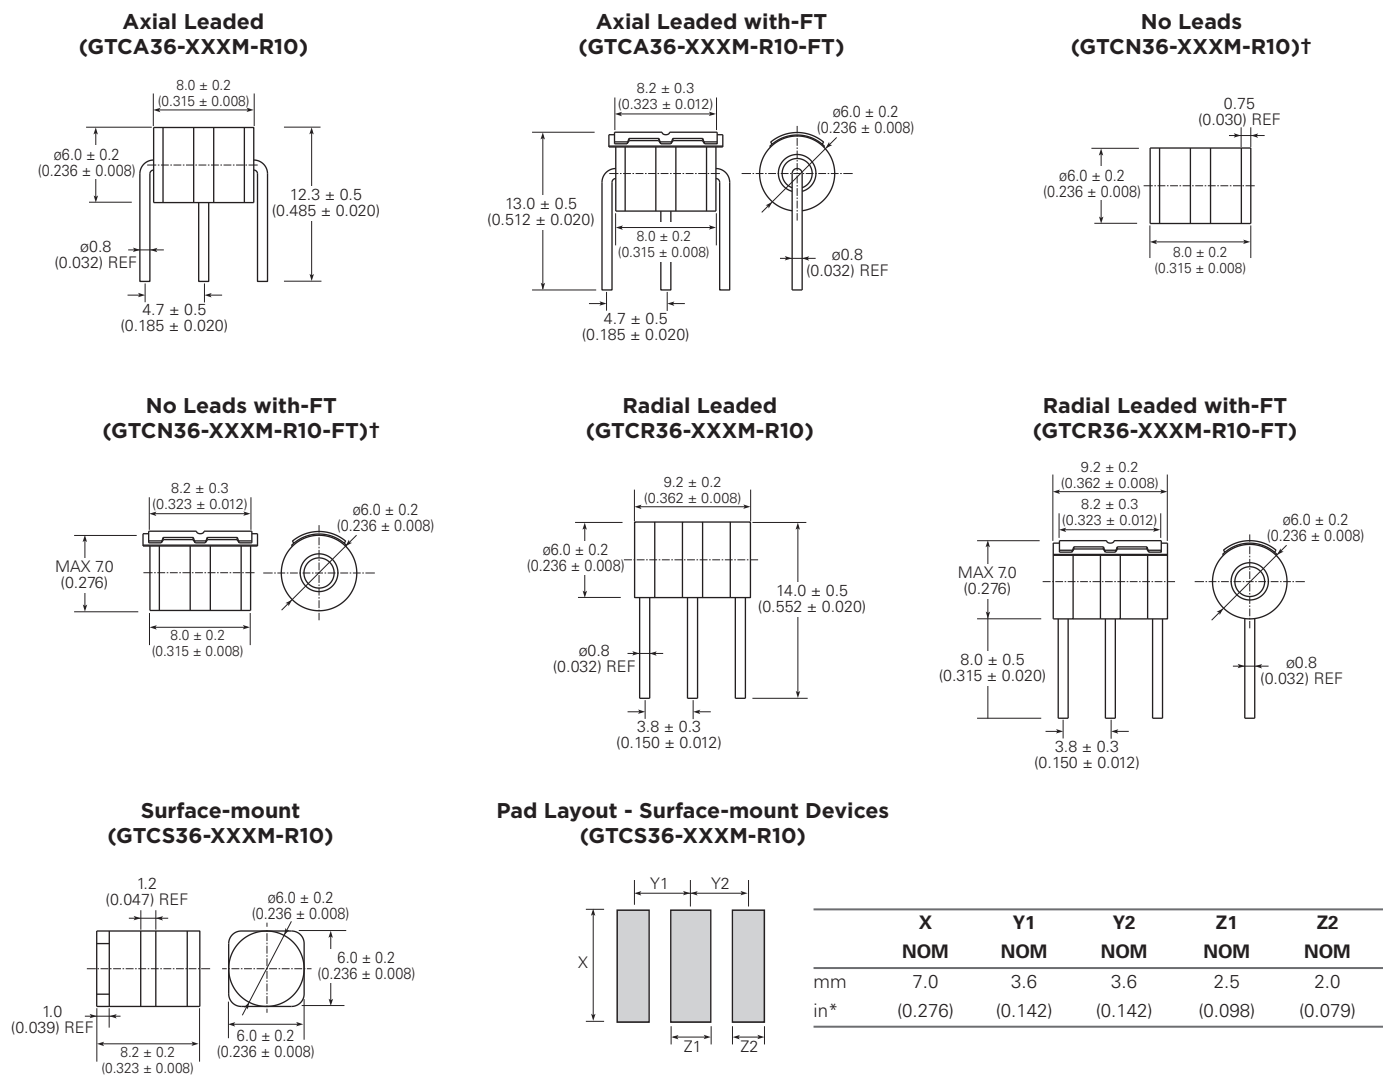


† Parts with no leads are non-solderable; meant for insertion into magazine clips

Figure G9 Three Electrode 7mm Product Dimensions

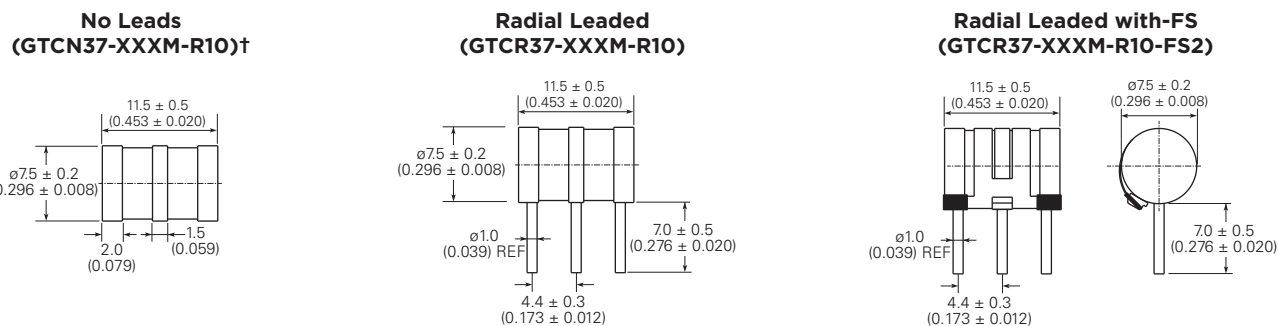

† Parts with no leads are non-solderable; meant for insertion into magazine clips

Figure G10 Three Electrode 8mm Product Dimensions

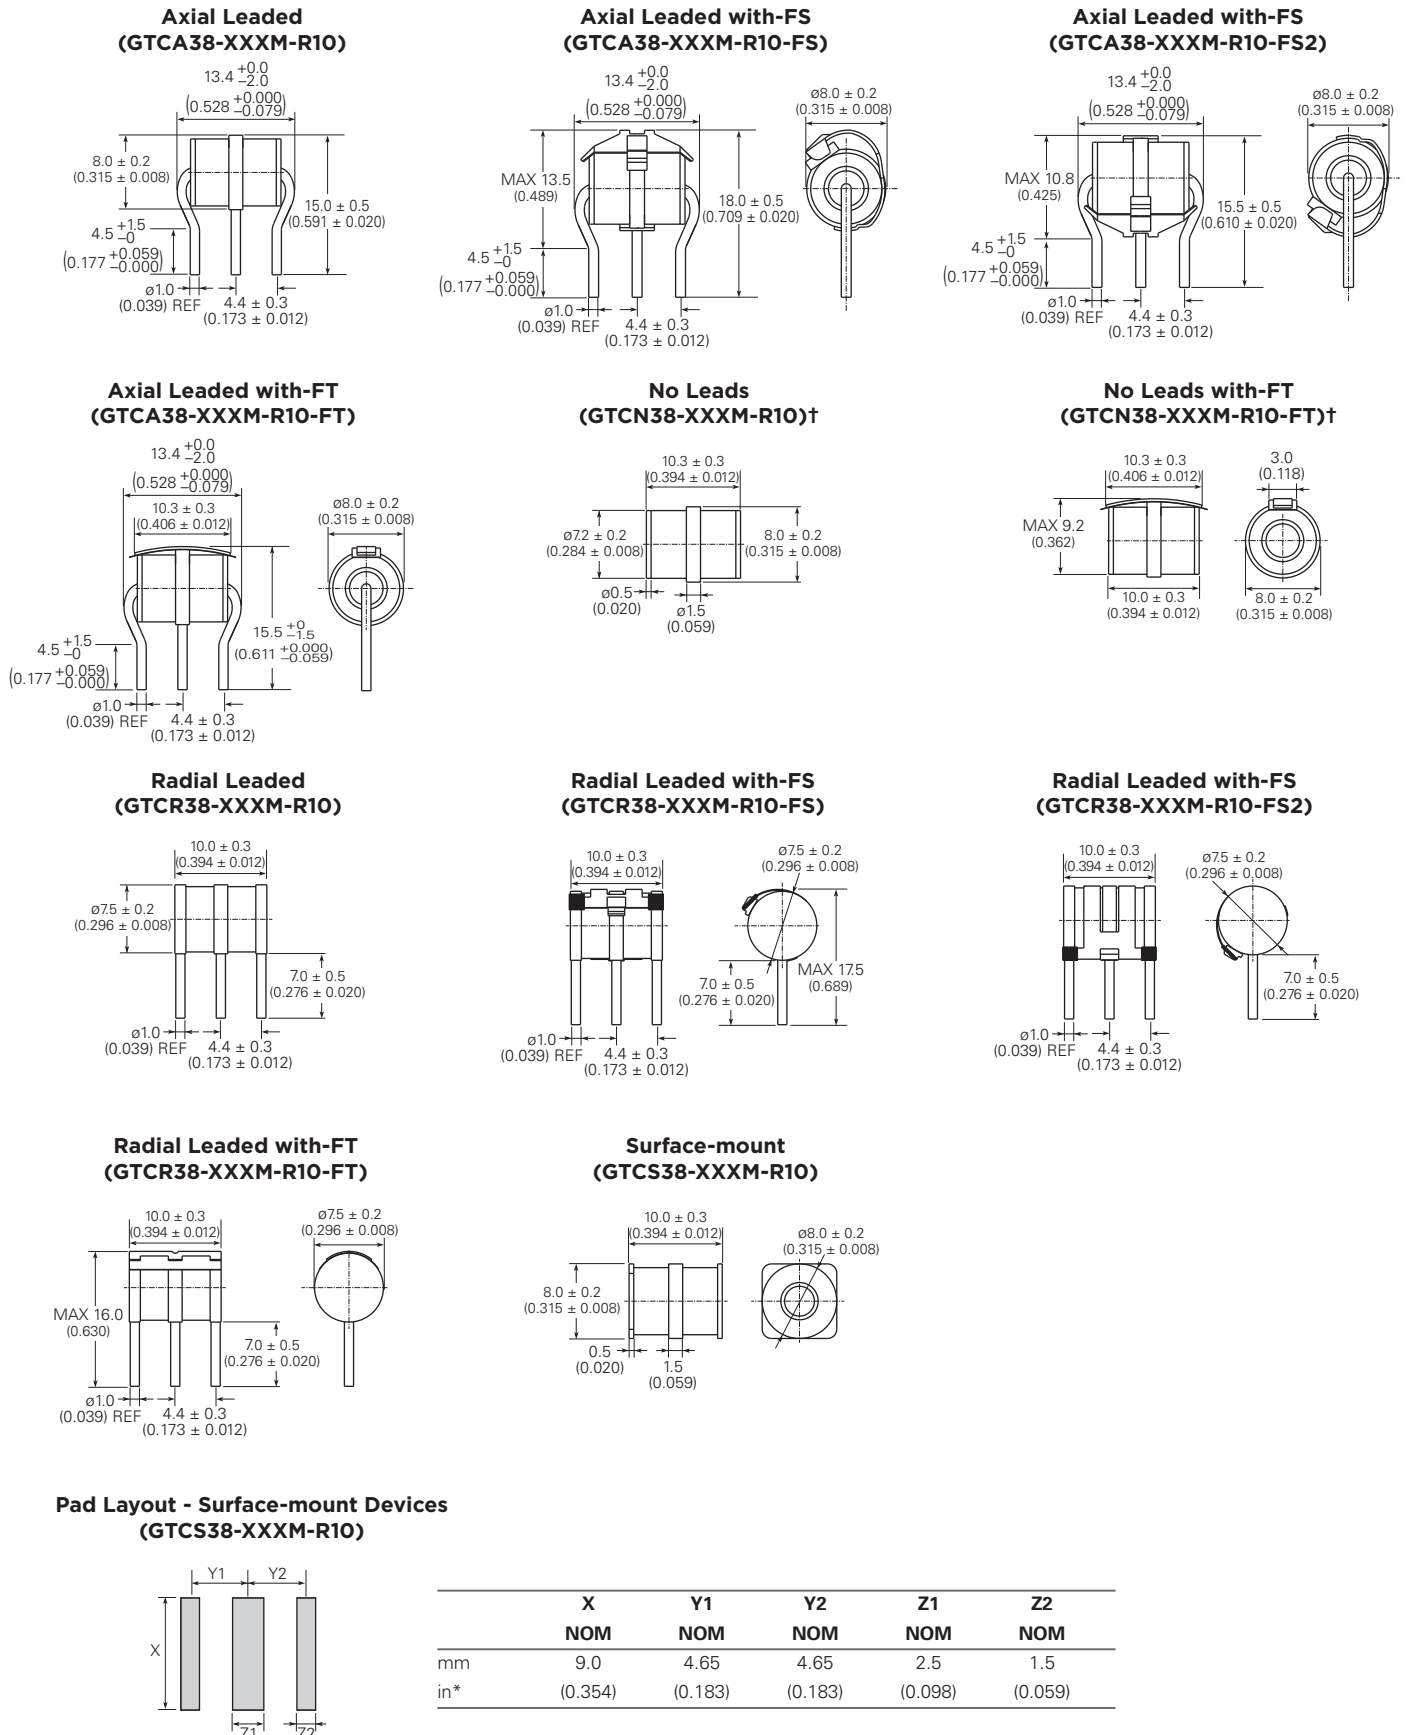

* Rounded off approximation

† Parts with no leads are non-solderable; meant for insertion into magazine clips

Fail-Short Mechanism

Fail-Short Mechanism (FS)

The Fail-Short Mechanism is a short circuit spring mounted onto a solder pellet located at the center electrode of the gas tube. Under normal operating conditions, the pellet is positioned to make the spring float above the outer electrodes, as shown in Figure A.

When a prolonged discharge event causes the gas tube temperature to reach the melting point of the solder, the pellet softens allowing the short circuit spring to contact with both outer electrodes. This process results in a permanent short-circuit between all three electrodes creating a low resistance path that conducts the fault current to ground without generating a significant amount of heat.

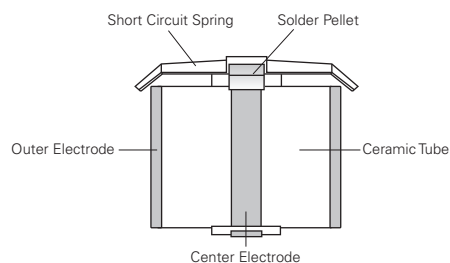


Figure A

Fail-Short Mechanism (FT)

The Fail-Short Mechanism is a short circuit spring with a piece of plastic foil spot welded onto the center electrode. Under normal operating conditions, the plastic foil makes the spring insulated from the two outer electrodes.

When a prolonged discharge event causes the gas tube temperature to reach the melting point of the plastic foil, the plastic foil melts allowing the short circuit spring to contact both outer electrodes. This process results in a permanent short-circuit between all three electrodes creating a low resistance path that conducts the fault current to ground without generating a significant amount of heat.

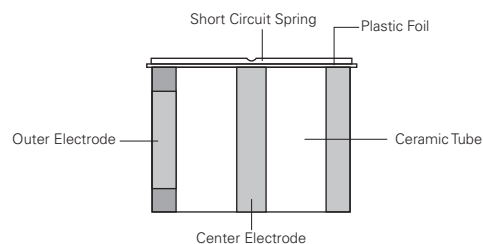


Figure B

Temperature

Operation Temperature Range

Models without Fail-Short Mechanism : -40°C/+90°C
Models with Fail-Short Mechanism : -20°C/+65°C

Storage Temperature Range

Models without Fail-Short Mechanism : -40°C/+90°C
Models with Fail-Short Mechanism : -20°C/+65°C

Packaging Information

Part Description	Parts in Bulk		Parts in Tape and Reel	
	Min Order Quantity	Box Quantity	Tape & Reel Min Order Quantity	Box Quantity
3mm 2Pole Surface-mount	-	-	2000	8000
5mm 2Pole No leads	5000	20000	-	-
5mm 2Pole, Leads	1000	5000	-	-
5mm 2Pole Surface-mount	5000	20000	1500	12000
6mm 2Pole No leads	2000	10000	-	-
6mm 2Pole, Leads	1000	5000	-	-
6mm 2Pole Surface-mount	2000	10000	750	6000
8mm 2pole No leads	2000	10000	-	-
8mm 2Pole, Leads	1000	5000	-	-
8mm 2Pole Surface-mount	2000	10000	500	2500
5mm 3Pole No leads	2500	10000	-	-
5mm 3Pole, Leads	1000	5000	-	-
5mm 3Pole Surface-mount	2500	10000	1000	8000
6mm 3Pole No leads	2500	10000	-	-
6mm 3Pole, Leads	1000	5000	-	-
6mm 3Pole Surface-mount	2500	10000	750	6000
7mm 3Pole, Leads	1000	5000	-	-
8mm 3Pole No leads	1000	10000	-	-
8mm 3Pole, Leads	1000	5000	-	-
8mm 3Pole Surface-mount	1000	10000	500	2500

Installation


Care should be taken when installing Gas Discharge Tubes equipped with Fail-Short Mechanisms into arrester magazines, printed circuit boards, etc. Too much downward pressure may force the short circuit spring through the thin insulation tube creating a shorted condition.

Solder Reflow Recommendations for Surface-mount GDT Devices

Surface-mount GDTs can be soldered using standard Pb-free reflow profile.


Part Numbering System

Two Electrode GDT - Example Part Number for R Series Devices

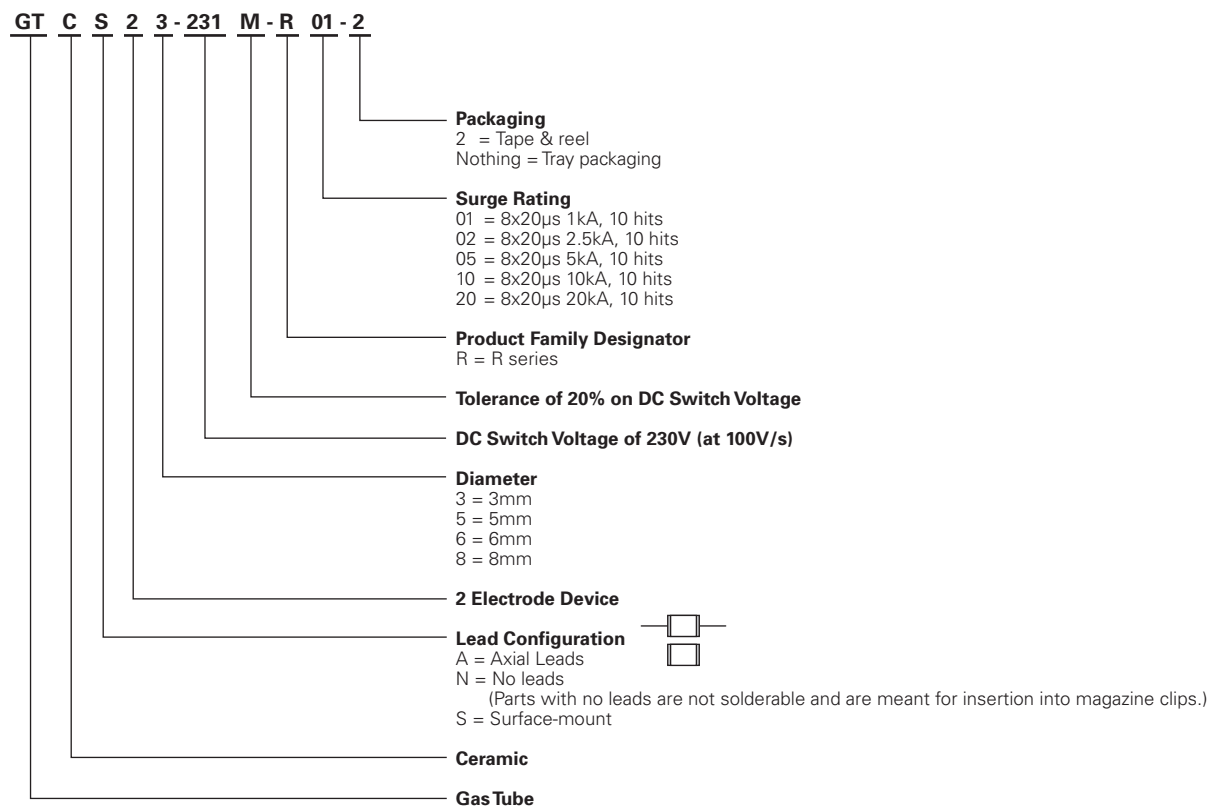


NOTE: GTCS23-XXXM-R01 parts available only in surface-mount and tape and reel packaging

Three Electrode GDT - Example Part Number for R Series Devices

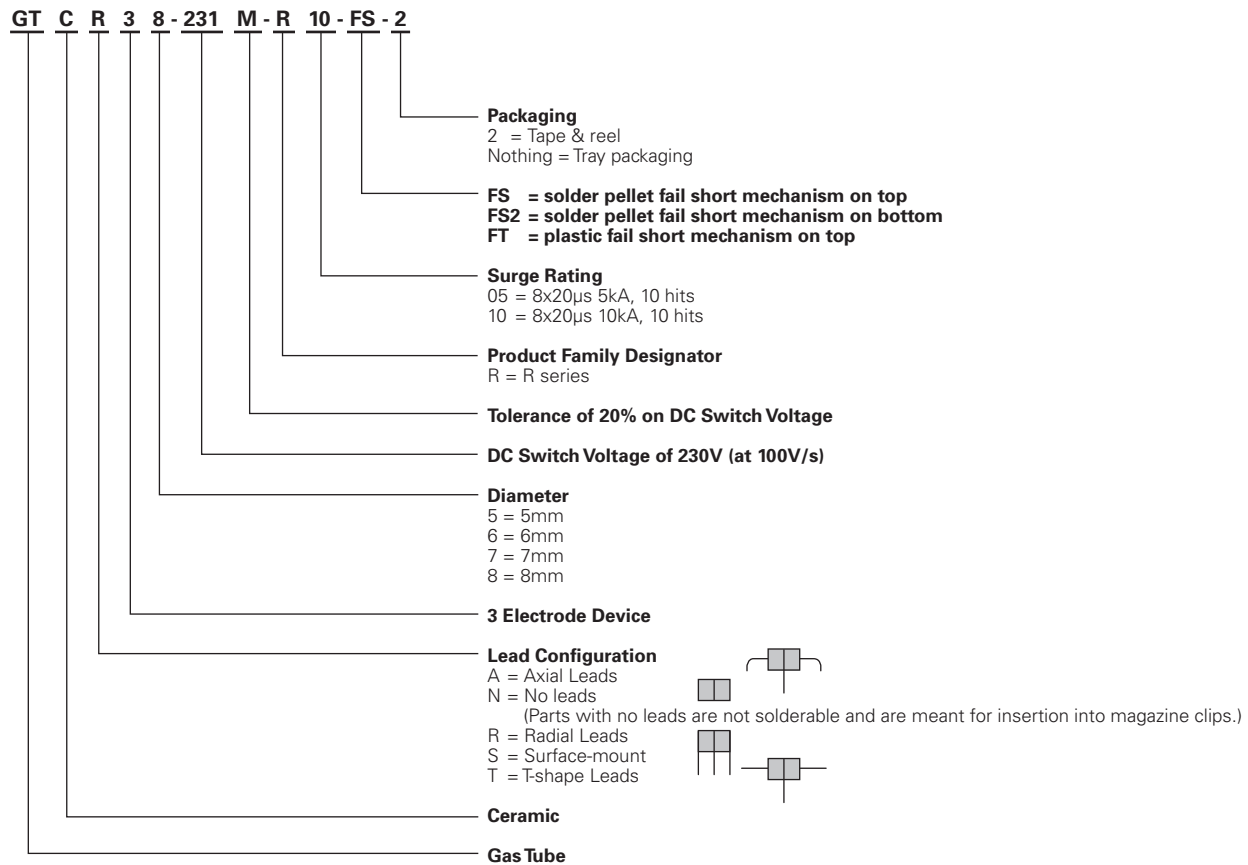

Marking Reference Guide - Example

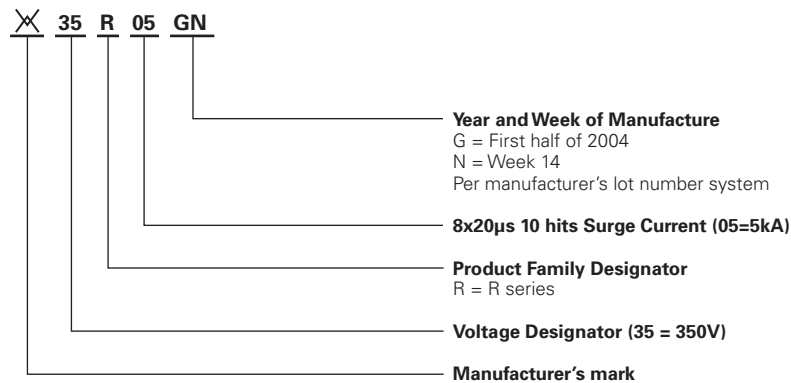

NOTES: GTCS23-XXXM-R01 parts will have no marking.

Devices with no leads (GTGNxx-xxxx-xx) are not able to be soldered as their electrodes are Nickel plated. They should be installed by insertion into a magazine clip.

**Warning :**

- Operation beyond the maximum ratings or improper use may result in device damage and possible electrical arcing and flame.
- The devices are intended for protection against occasional overvoltage fault conditions and should not be used when repeated fault conditions or prolonged trip events are anticipated.
- Device performance can be impacted negatively if devices are handled in a manner inconsistent with recommended electronic, thermal, and mechanical procedures for electronic components.



Raychem Circuit Protection Product Headquarters

308 Constitution Drive, Building H
Menlo Park, CA USA 94025-1164
Tel : (800) 227-7040, (650) 361-6900
Fax : (650) 361-4600

www.circuitprotection.com
www.circuitprotection.com.hk (Chinese)
www.tycoelectronics.com/japan/raychem (Japanese)

SOUTH AMERICA

Brazil

Tel : 55-11-5181-4788
Fax : 55-11-5181-4790
Tel : 55-11-2103-6090
Fax : 55-11-2103-6216

EUROPE

UK / Eire / Benelux /

Israel / South Africa
Tel : 49-89-6089485
Fax : 49-89-6089394

Germany / Austria / Switzerland / Eastern Europe / Russia

Tel : 49-89-6089584
Fax : 49-89-6089394

France / Italy / Iberia / Greece / Turkey

Tel : 33-1-34202261
Fax : 33-1-34202324

Nordic / Baltic

Tel : 49-89-6089485
Fax : 49-89-6089394

Other Countries

Tel : 49-89-6089696
Fax : 49-89-6089394

ASIA / PACIFIC

Japan

Tel : 81-44-900-5110
Fax : 81-44-900-5140

Korea

Tel : 82-2-3415-4654
Fax : 82-2-3486-1786

Taiwan

Tel : 886-2-8768-2788 x 211
Fax : 886-2-8768-1277

China, Beijing

Tel : 86-10-6569-3488 x 16522
Fax : 86-10-6569-3206

China, Shanghai

Tel : 86-21-6106-7388
Fax : 86-21-6485-3255

China, Shenzhen / Guangzhou

Tel : 86-755-2515-4797
Fax : 86-755-2598-0419

China, Hong Kong

Tel : 852-2738-3401
Fax : 852-2735-1185

Singapore / Vietnam

Tel : 65-6416-4205
Fax : 65-6484-0661

Thailand / Malaysia

Tel : 6-04-217-8112
Fax : 6-04-229-8177

Australia / Philippines

Tel : 63-2-848-0171 x 103
Fax : 63-2-867-8661

India

Tel : 91-80-4161-3745
Mobile : 91-99-0248-8886

PolySwitch, Raychem, SiBar, TE Logo and Tyco Electronics are trademarks. All information, including illustrations, is believed to be reliable. Users, however, should independently evaluate the suitability of each product for their application. Tyco Electronics Corporation makes no warranties as to the accuracy or completeness of the information, and disclaims any liability regarding its use. Tyco Electronics' only obligations are those in the Tyco Electronics Standard Terms and Conditions of Sale for this product, and in no case will Tyco Electronics be liable for any incidental, indirect, or consequential damages arising from the sale, resale, use, or misuse of the product. Specifications are subject to change without notice. In addition, Tyco Electronics reserves the right to make changes without notification to Buyer—to materials or processing that do not affect compliance with any applicable specification.

© 2009 Tyco Electronics Corporation. All rights reserved. RCP0043E.0409

 **Tyco Electronics**
Our commitment. Your advantage.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Littelfuse:

[GTCA36-4211M-R10](#) [GTCS28-421M-R10-2](#) [GTCS23-201M-R01-2](#)