


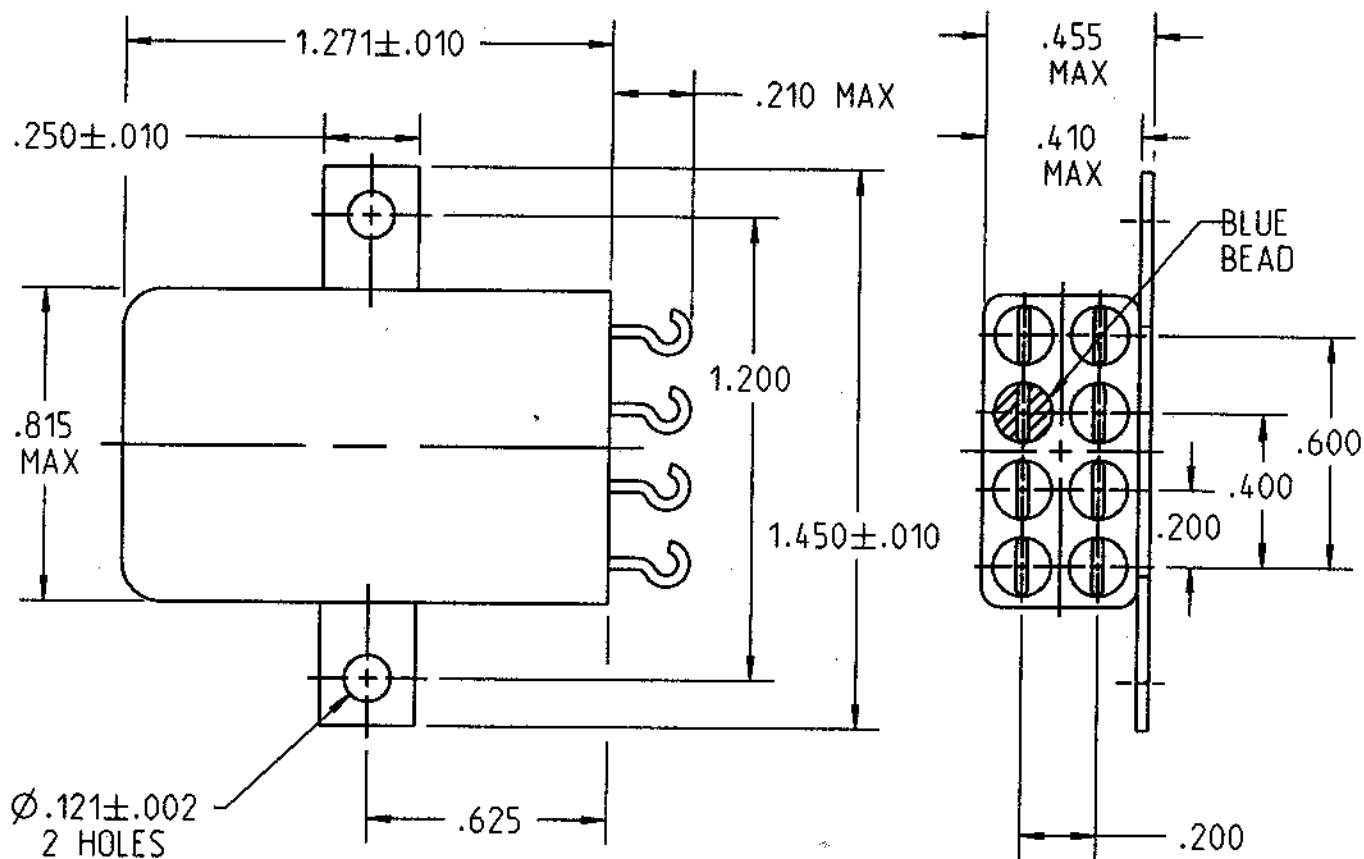

REV. 0
DCO 170672

COIL: @ 25°C
 RESISTANCE 10000 OHMS $\pm 10\%$
 NOMINAL VOLTAGE 4.0 mADC
 MUST OPERATE 2.0 mADC
 MUST RELEASE 1.0 mADC MAX 0.20 mADC MIN


ENVIRONMENT:

VIBRATION 10 Hz TO 2000 Hz @ 15 g's
 SHOCK 100 g's 6 MS. DURATION
 TEMPERATURE -65 °C TO +125 °C

NOTES:

OPERATE TIME 15 MS MAX.
 RELEASE TIME 10 MS MAX.
 CONTACT BOUNCE 2 MS MAX.

CUSTOMER DATA SHEET

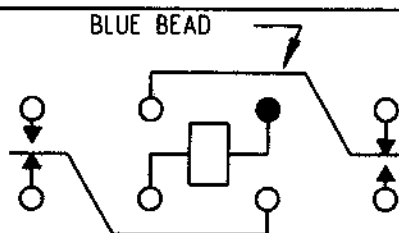

TERMINAL VIEW

CONTACT RATING:
 LOW LEVEL TO
 2 AMPS 28 VDC RESISTIVE
 100,000 OPERATIONS

DR. ASB 10 JUL 02

CK. *[Signature]* 7/11/02

Cil Technologies
 advanced control electronic solutions

CUST. QPL
 CUST. NO. M5757/13-143 REV.

3SAT RELAY

3SAT1360A2

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[3SAT1360A2](#)