

Passive module - VIP-PT/FLK16/DS/FU/LED/AN/DV - 2903599

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)

VARIOFACE interface module for 8 channels



Your advantages

- ✓ These system-specific interface modules for DeltaV modules are used in combination with the relevant system cables
- ✓ Knife disconnect for each channel
- ✓ Pluggable fuse for each channel



Key Commercial Data

Packing unit	1 pc
GTIN	 4 046356 948135
GTIN	4046356948135

Technical data

Dimensions

Width	57.1 mm
Height	109.8 mm
Depth	63 mm

Ambient conditions

Ambient temperature (operation)	-20 °C ... 60 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C

General

Nominal voltage U_N	24 V DC
Max. perm. current (per branch)	63 mA (in as supplied state, with one 63 mA fuse)
Number of positions	16
Mounting position	any

Connection data

Passive module - VIP-PT/FLK16/DS/FU/LED/AN/DV - 2903599

Technical data

Connection data

Connection name	Field level
Connection method	Push-in connection
Stripping length	8 mm
Conductor cross section solid	0.14 mm ² ... 2.5 mm ²
Conductor cross section flexible	0.14 mm ² ... 2.5 mm ²
Conductor cross section AWG	26 ... 14

Connection data 2

Connection name	Controller level
Connection method	IDC/FLK pin strip
Number of connections	1
Number of positions	16
Pitch	2.54 mm

Supported controller

Controller	Emerson DeltaV
- suitable I/O card	VE4003S2B4
	VE4005S2B3
	VE4003S3B5
	SE4003S2B4

Standards and Regulations

Connection in acc. with standard	CSA
Standards/regulations	DIN EN 50178


Environmental Product Compliance

China RoHS	Environmentally Friendly Use Period = 50 years
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"

Drawings

Passive module - VIP-PT/FLK16/DS/FU/LED/AN/DV - 2903599

Circuit diagram

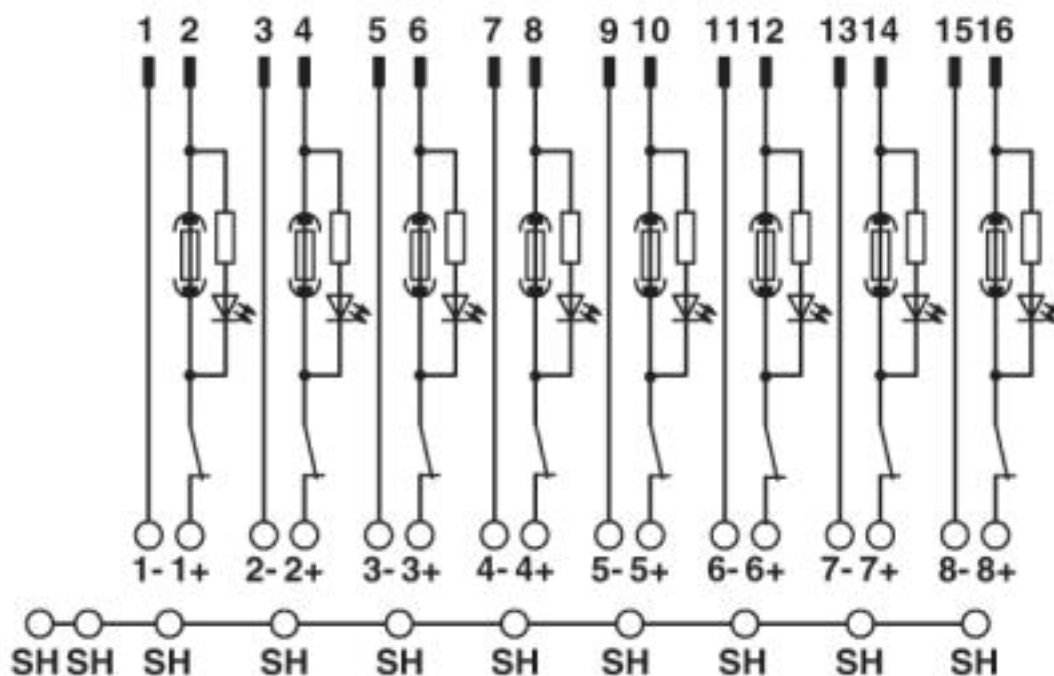

Connection scheme VIP-PT/FLK16/DS/FU/LED/AN/DV

Classifications

eCl@ss

eCl@ss 4.0	27250313
eCl@ss 4.1	27250300
eCl@ss 5.0	27250313
eCl@ss 5.1	27242600
eCl@ss 6.0	27242600
eCl@ss 7.0	27141152
eCl@ss 8.0	27141152
eCl@ss 9.0	27141152

ETIM

ETIM 4.0	EC002780
ETIM 5.0	EC002780
ETIM 6.0	EC002780
ETIM 7.0	EC002780

UNSPSC

UNSPSC 13.2	39121432
UNSPSC 18.0	39121432
UNSPSC 19.0	39121432

Passive module - VIP-PT/FLK16/DS/FU/LED/AN/DV - 2903599

Classifications

UNSPSC

UNSPSC 20.0	39121432
UNSPSC 21.0	39121432

Approvals

Approvals

Approvals

CSA / UL Recognized / cUL Recognized / EAC / cULus Recognized

Ex Approvals

Approval details

CSA		http://www.csagroup.org/services-industries/product-listing/	2122203
Nominal voltage UN		24 V	
Nominal current IN		0.063 A	
mm²/AWG/kcmil		26-14	

UL Recognized		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	FILE E 238705
Nominal voltage UN		24 V	
Nominal current IN		0.063 A	
mm²/AWG/kcmil		26-14	

cUL Recognized		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	FILE E 238705
Nominal voltage UN		24 V	
Nominal current IN		0.063 A	
mm²/AWG/kcmil		26-14	

Passive module - VIP-PT/FLK16/DS/FU/LED/AN/DV - 2903599

Approvals

EAC



RU C-
DE.A*30.B.01742

cULus Recognized



Phoenix Contact 2020 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>