
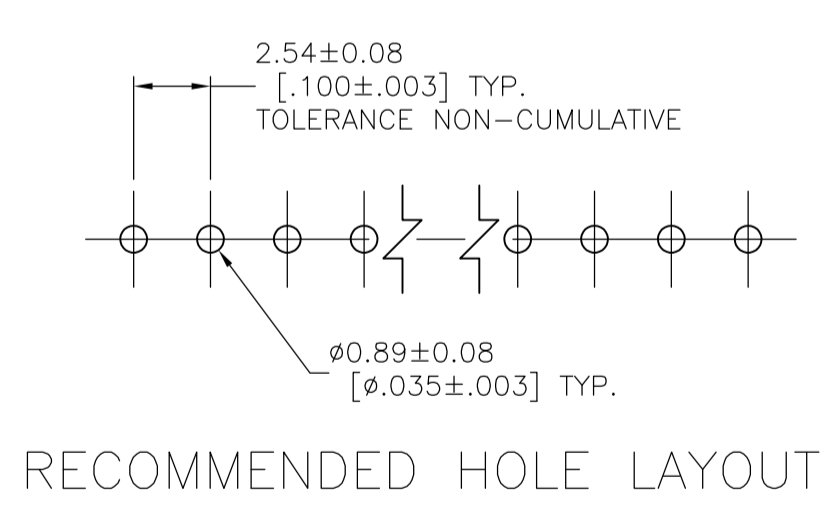


REVISIONS					
REV	DATE	BY	CHKD	APPD	DESCRIPTION
R	05AUG2016	NK	MM		REVISD PER ECO-16-006307
S	02DEC2016	RS	KM		REVISD PER ECR-16-016633

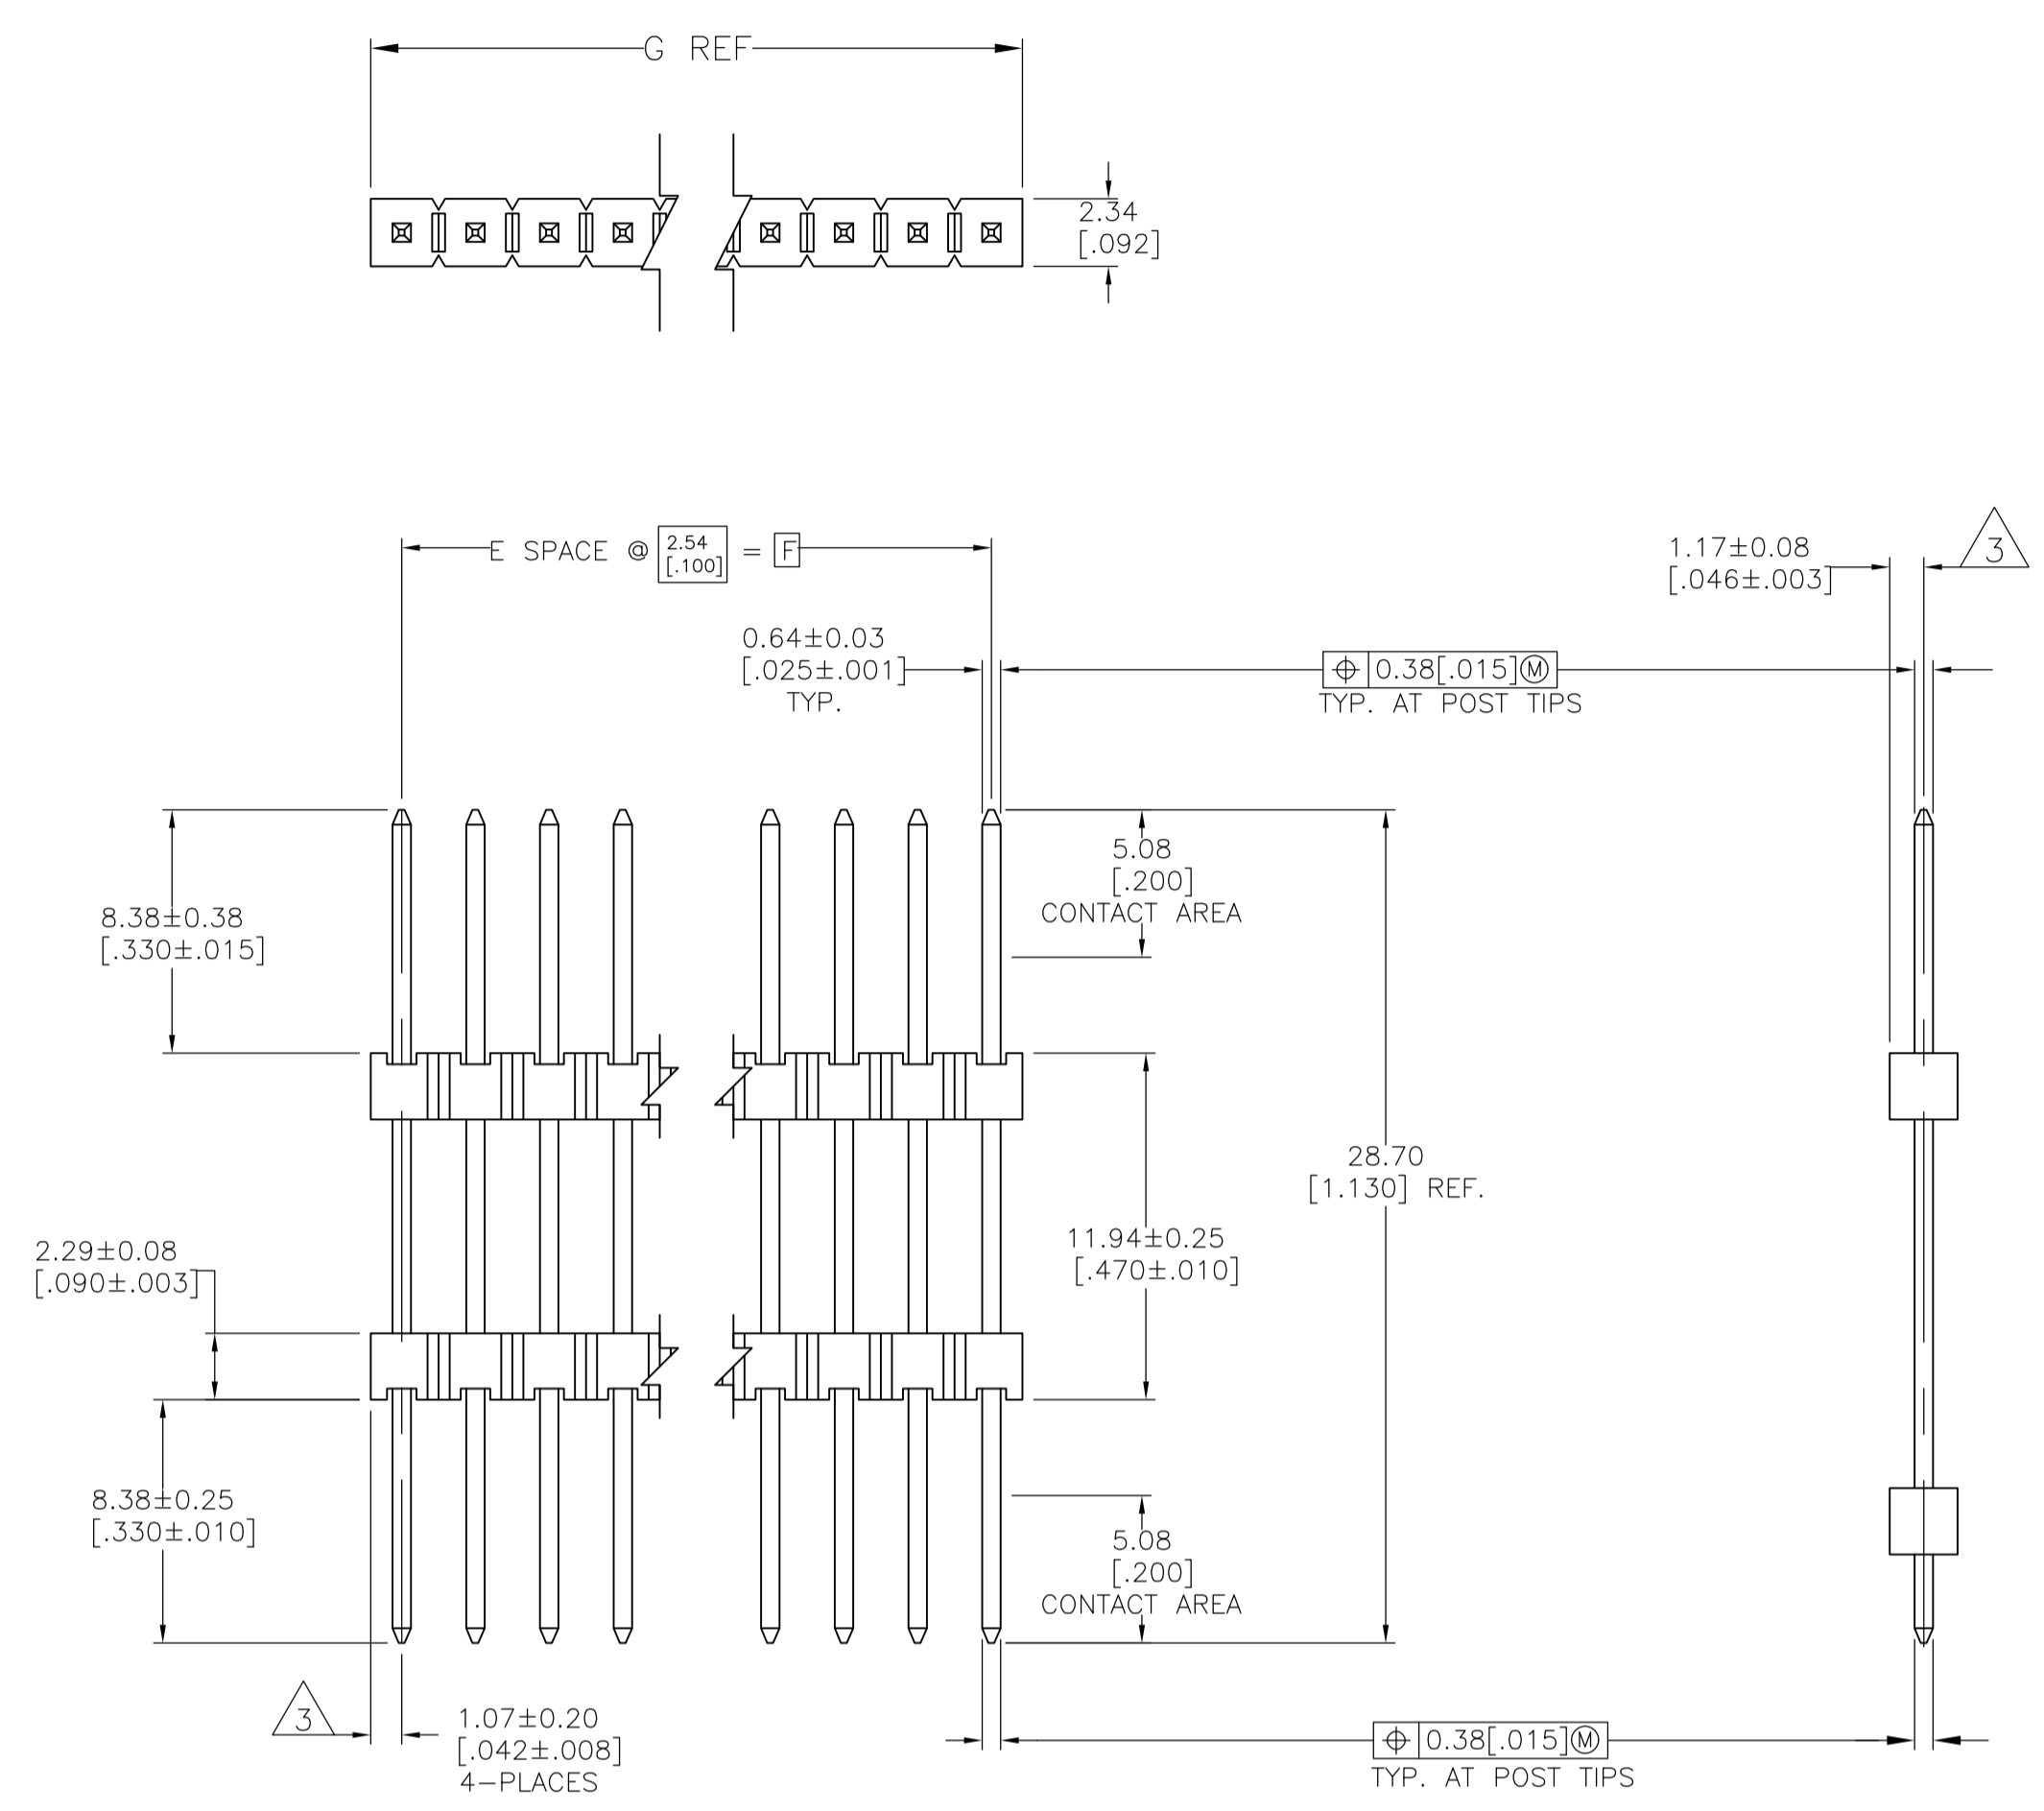

- 1 ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS.
- 2 TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADER IS HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD.
- 3 THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING.
- 4 HOUSING: FLAME RETARDANT THERMOPLASTIC; COLOR: BLACK.
- 5 FINISH: 0.000381 [.000015] GOLD ON CONTACT AREA, ALL OVER 0.00127 [.000050] NICKEL ENTIRE POST.

REV	DATE	BY	CHKD	APPD	DESCRIPTION
OBSOLETE	101.19	99.06	39	40	-4-146473-0-
OBSOLETE	98.65	96.52	38	39	-3-146473-9-
OBSOLETE	96.11	93.98	37	38	-3-146473-8-
OBSOLETE	93.57	91.44	36	37	-3-146473-7-
OBSOLETE	91.03	88.90	35	36	-3-146473-6-
OBSOLETE	88.49	86.36	34	35	-3-146473-5-
OBSOLETE	85.95	83.82	33	34	-3-146473-4-
OBSOLETE	83.41	81.28	32	33	-3-146473-3-
OBSOLETE	80.87	78.74	31	32	-3-146473-2-
OBSOLETE	78.33	76.20	30	31	-3-146473-1-
OBSOLETE	75.79	73.66	29	30	-3-146473-0-
OBSOLETE	73.25	71.12	28	29	-2-146473-9-
OBSOLETE	70.71	68.58	27	28	-2-146473-8-
OBSOLETE	68.17	66.04	26	27	-2-146473-7-
OBSOLETE	65.63	63.50	25	26	-2-146473-6-
OBSOLETE	63.09	60.96	24	25	-2-146473-5-
OBSOLETE	60.55	58.42	23	24	-2-146473-4-
OBSOLETE	58.01	55.88	22	23	-2-146473-3-
OBSOLETE	55.47	53.34	21	22	-2-146473-2-
OBSOLETE	52.93	50.80	20	21	-2-146473-1-
OBSOLETE	50.39	48.26	19	20	-2-146473-0-
OBSOLETE	47.85	45.72	18	19	-1-146473-9-
OBSOLETE	45.31	43.18	17	18	-1-146473-8-
OBSOLETE	42.77	40.64	16	17	-1-146473-7-
OBSOLETE	40.23	38.10	15	16	-1-146473-6-
OBSOLETE	37.69	35.56	14	15	-1-146473-5-
OBSOLETE	35.15	33.02	13	14	-1-146473-4-
OBSOLETE	32.61	30.48	12	13	-1-146473-3-
OBSOLETE	30.07	27.94	11	12	-1-146473-2-
OBSOLETE	27.53	25.40	10	11	-1-146473-1-
OBSOLETE	24.99	22.86	9	10	-1-146473-0-
OBSOLETE	22.45	20.32	8	9	-146473-9-
OBSOLETE	19.91	17.78	7	8	-146473-8-
OBSOLETE	17.37	15.24	6	7	-146473-7-
OBSOLETE	14.83	12.70	5	6	-146473-6-
OBSOLETE	12.29	10.16	4	5	-146473-5-
OBSOLETE	9.75	7.62	3	4	146473-4-
OBSOLETE	7.21	5.08	2	3	-146473-3-
OBSOLETE	4.67	2.54	1	2	-146473-2-
OBSOLETE	2.13	-	-	1	-146473-1-

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	±	-
1 PLC	±	-
2 PLC	±	0.51[.02]
3 PLC	±	0.12[.005]
4 PLC	±	0.0127[.0005]

ANGLES: ±

MATERIAL: 4

FINISH: 5

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIN E BRANDBERG 14MAR97

CHK G DUBNICZKI 14MAR97

APPD G DUBNICZKI 14MAR97

NAME: HEADER ASSEMBLY, MOD II, STACKING, SINGLE ROW, .025 SQ.POST, UNSHROUDED

PRODUCT SPEC: -

APPLICATION SPEC: -

SIZE: A1

WEIGHT: -

CUSTOMER DRAWING

SCALE: 4:1

SHEET 1 OF 1

REV S

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[146473-3](#)