
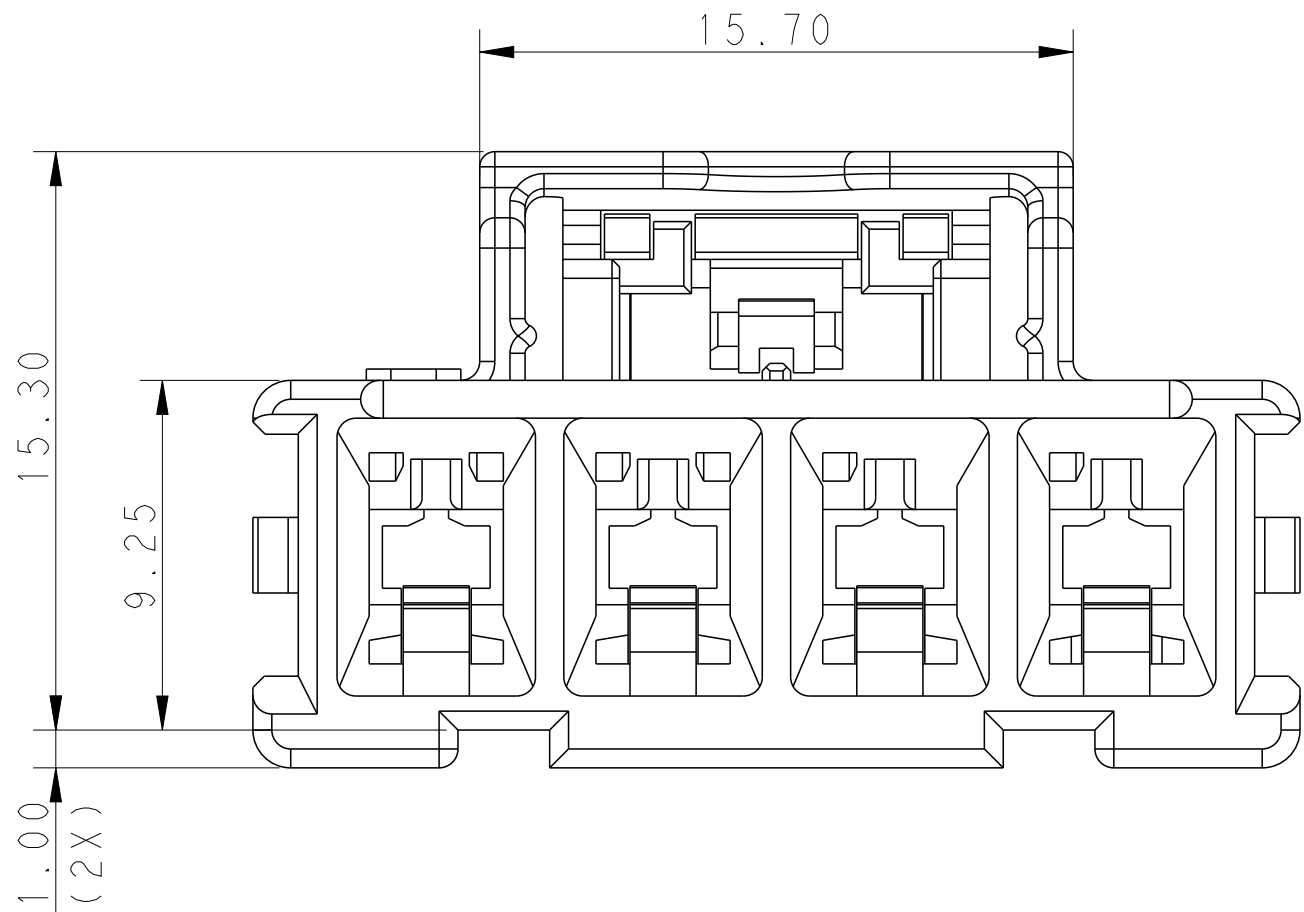
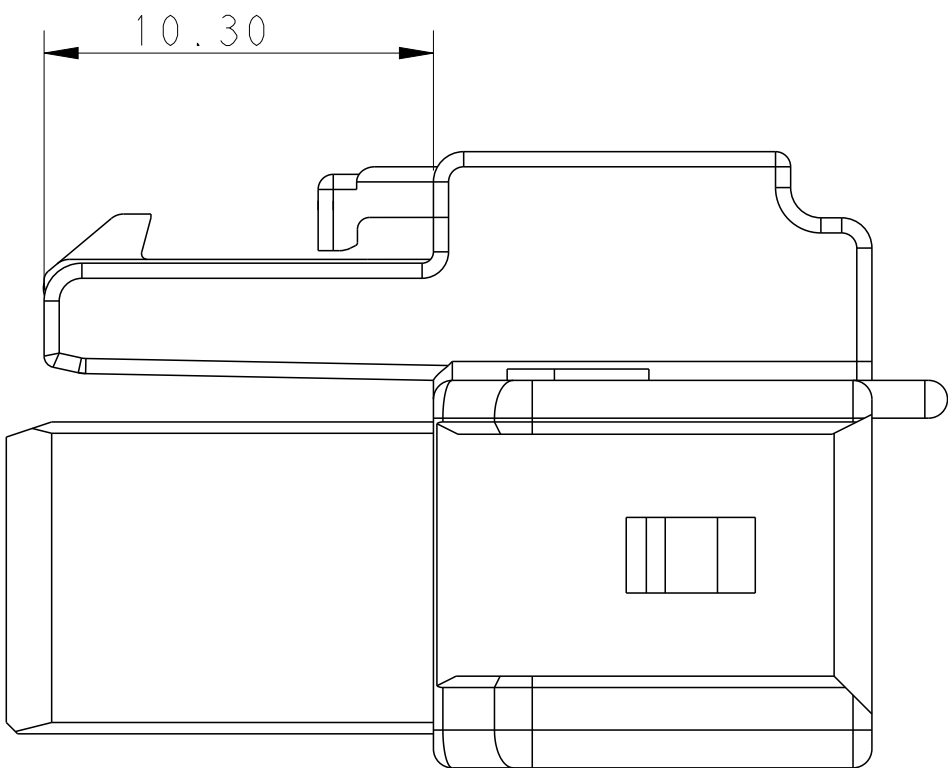
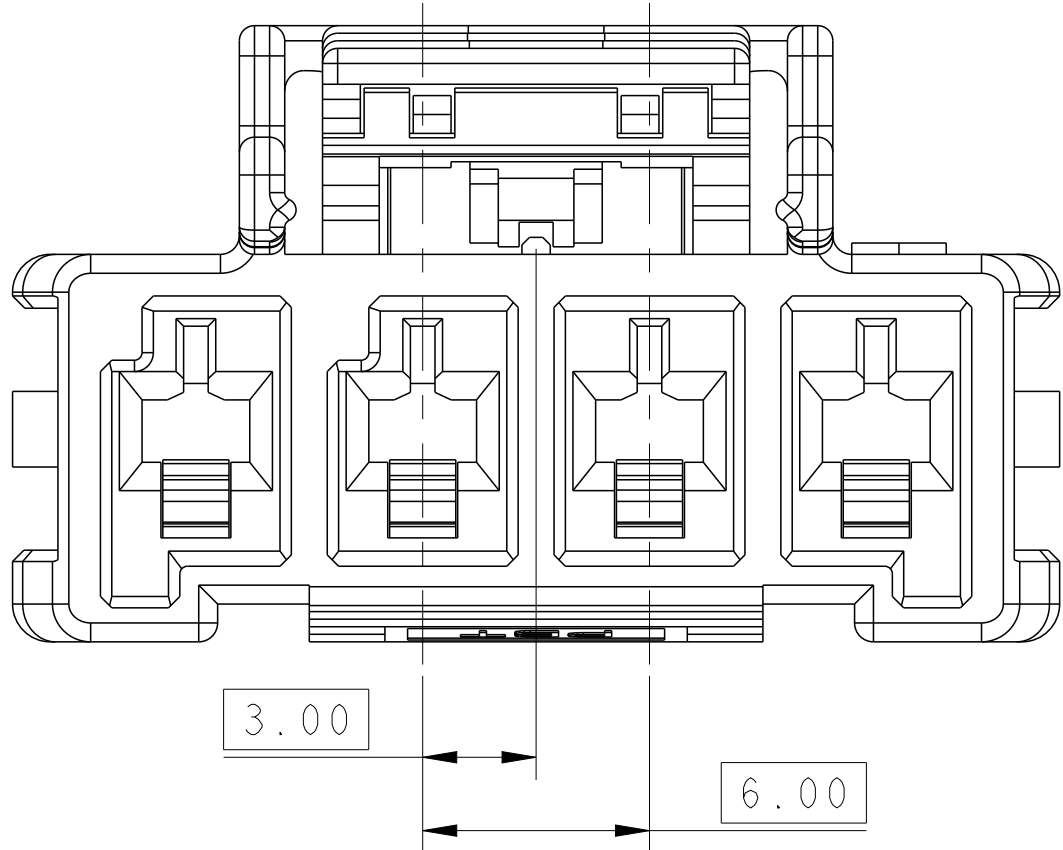


LOC		DIST	REVISIONS				
P	LTR	DESCRIPTION			DATE	DWN	APVD
	C	REVISED PER ECR-16-001024			03JUN2016	BW	GJ

POS.	DIM.A	DIM.B
1*5	33.70	28.00
1*4	27.70	22.00
1*3	21.70	16.00
1*2	15.70	10.00

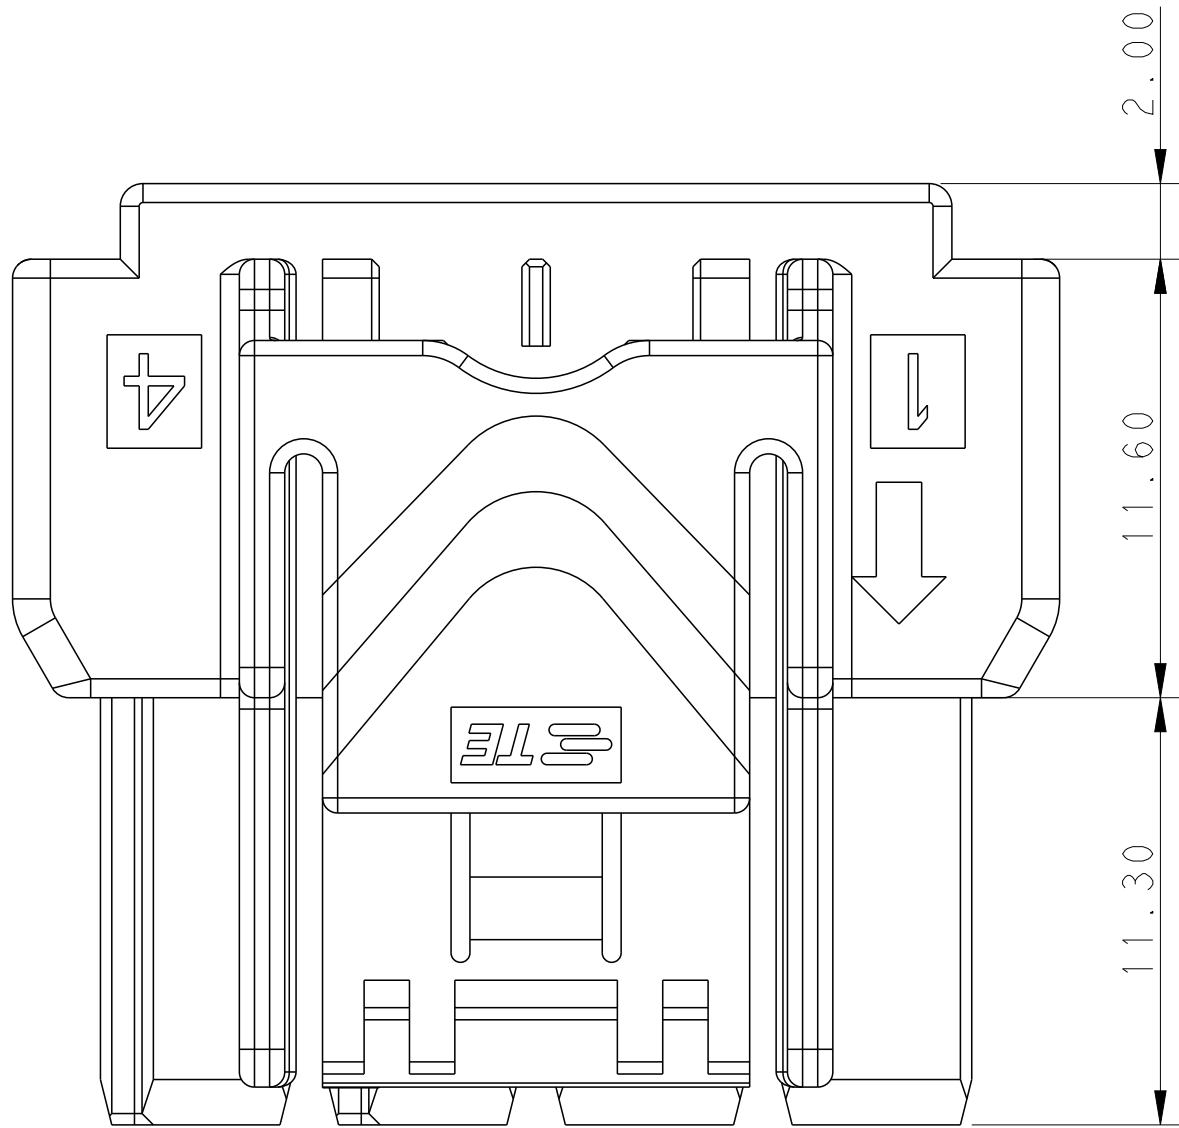


NOTE
1. MATERIAL:
LEVEL A: PA6, COMPLY WITH GLOW WIRE REQUIREMENTS FOR PARTS OF
NON-METALLIC MATERIAL SUPPORTING A CURRENT-CARRYING CONNECTION
DETAILED IN IEC 60335-1, SECTION 30 (GWT), UL 94V-0
LEVEL B: PBT, HOT WIRE IGNITION (HWI) VERSION ARE MOLDED IN
A RESIN THAT COMPLIES WITH TE HOT WIRE IGNITION TEST 109-32026
AND ARE RECOMMENDED FOR USE WITH HWI HOUSINGS THAT ALSO COMPLY,
UL 94V-0

2. MATERIAL MARK:
LEVEL A: GWT, LEVEL B: HWT









3. APPLICABLE CONTACT P/N
REC CONTACT: 1971237/1971779/81/83/85/87-*

4. MATING CONN. P/N
CAP HSG: *-2232358/263-
TPA: *-1971777-*

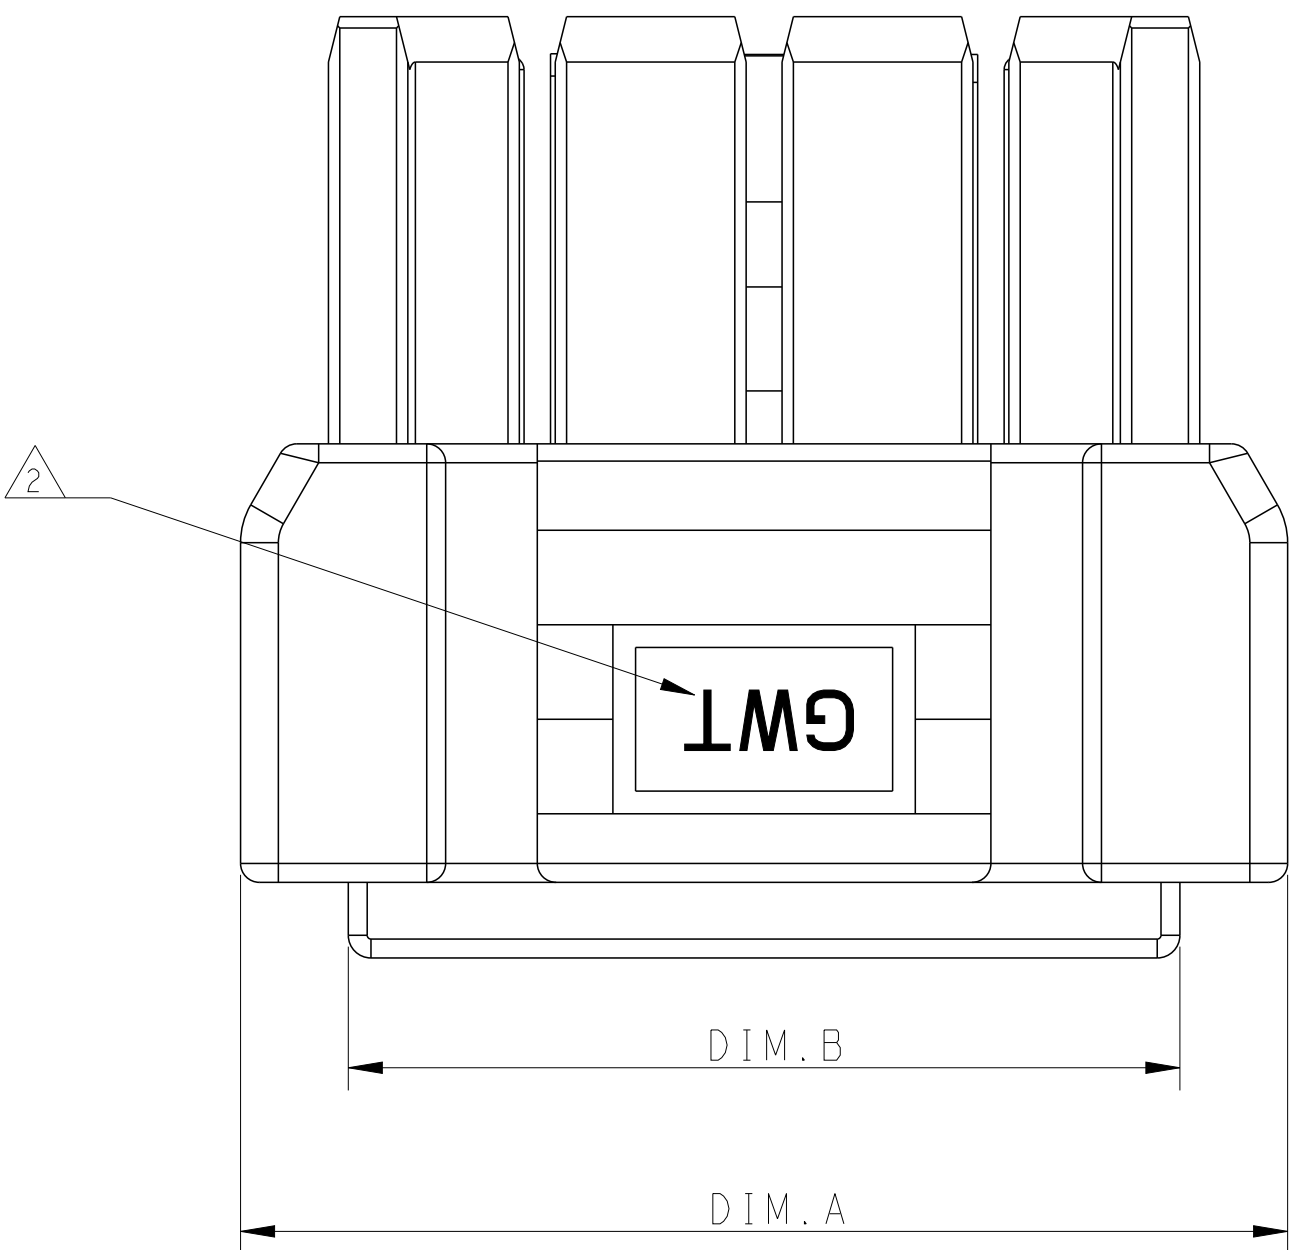

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	TOMMY_WU		26MAR2013		 TE Connectivity	
		CHK	HAPYE_WU		26MAR2013			
DIMENSIONS:		APVD	YUZHONG_MAO		26MAR2013		NAME PLUG HOUSING, SINGLE ROW POWER TRIPLE LOCK - SIZE CAGE CODE DRAWING NO A1 100779 C-2232265 Customer Drawing SCALE - SHEET 1 OF 2 REV C	
mm		PRODUCT SPEC						
		108-106118						
		APPLICATION SPEC						
MATERIAL		114-106118						
SEE TABLE		WEIGHT						
		-						
		Customer Drawing						
		SCALE						
		-						
		SHEET						
		1						
		OF						
		2						
		REV						
		C						

LOC		DIST		REVISONS			
P	LTR	DESCRIPTION			DATE	DWN	APVD
-	-	SEE SHEET 1			-	-	-

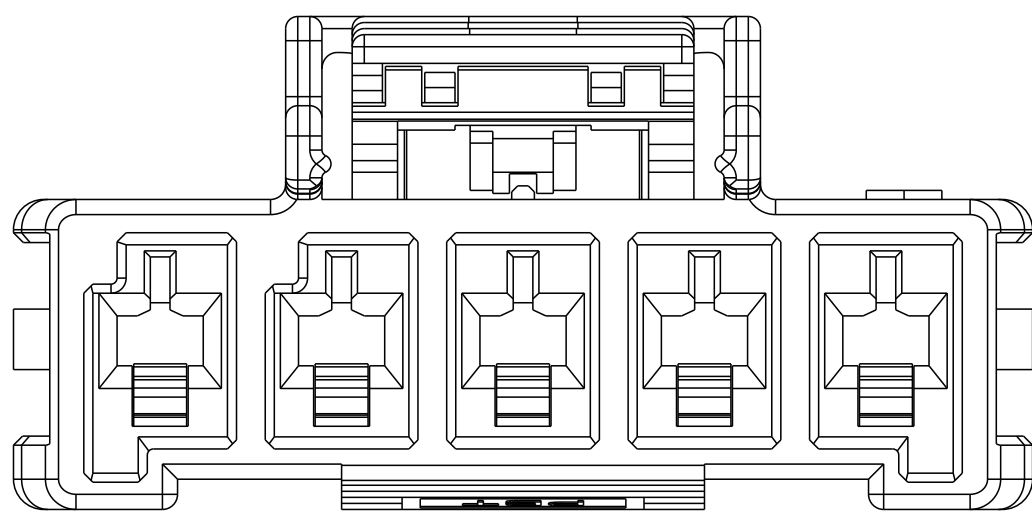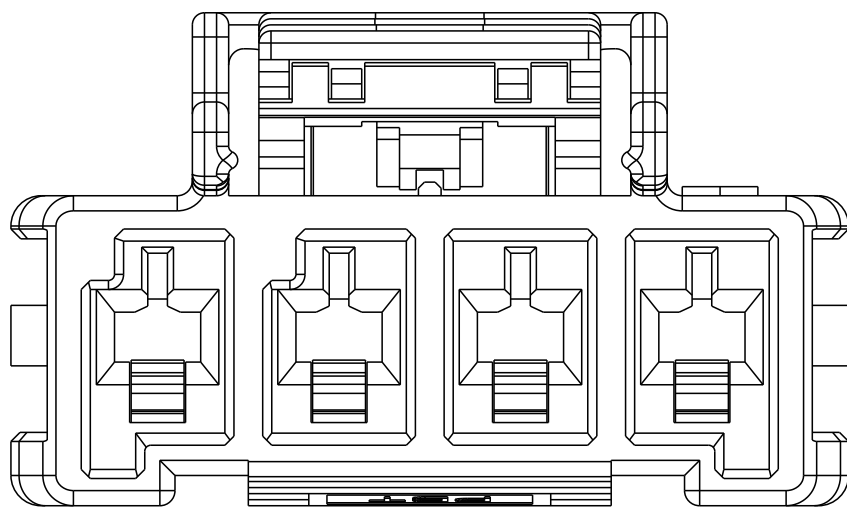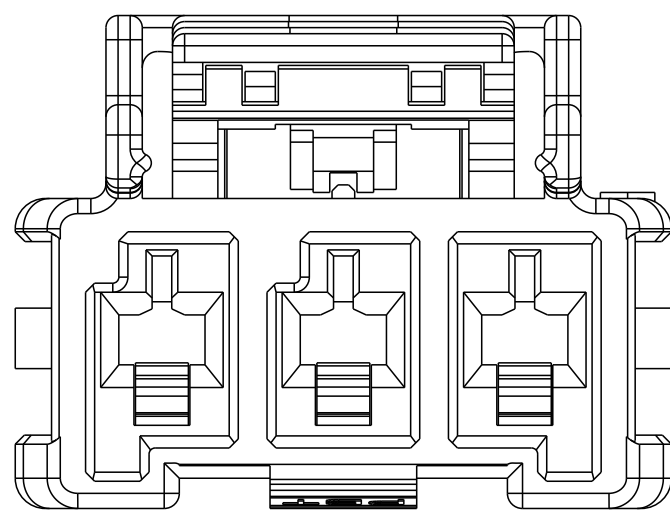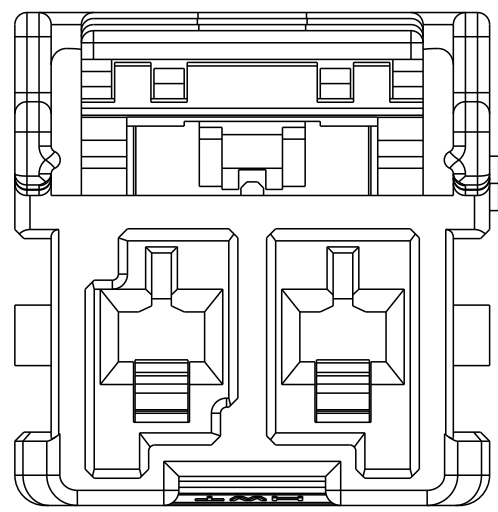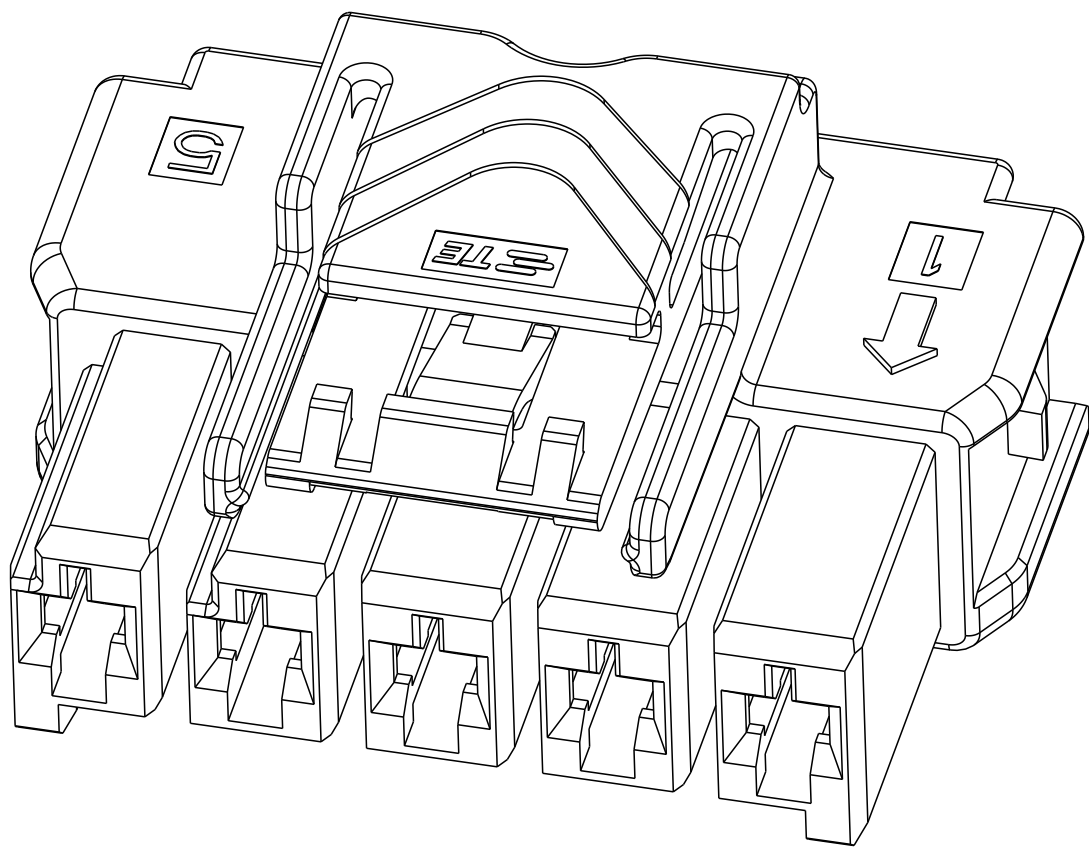
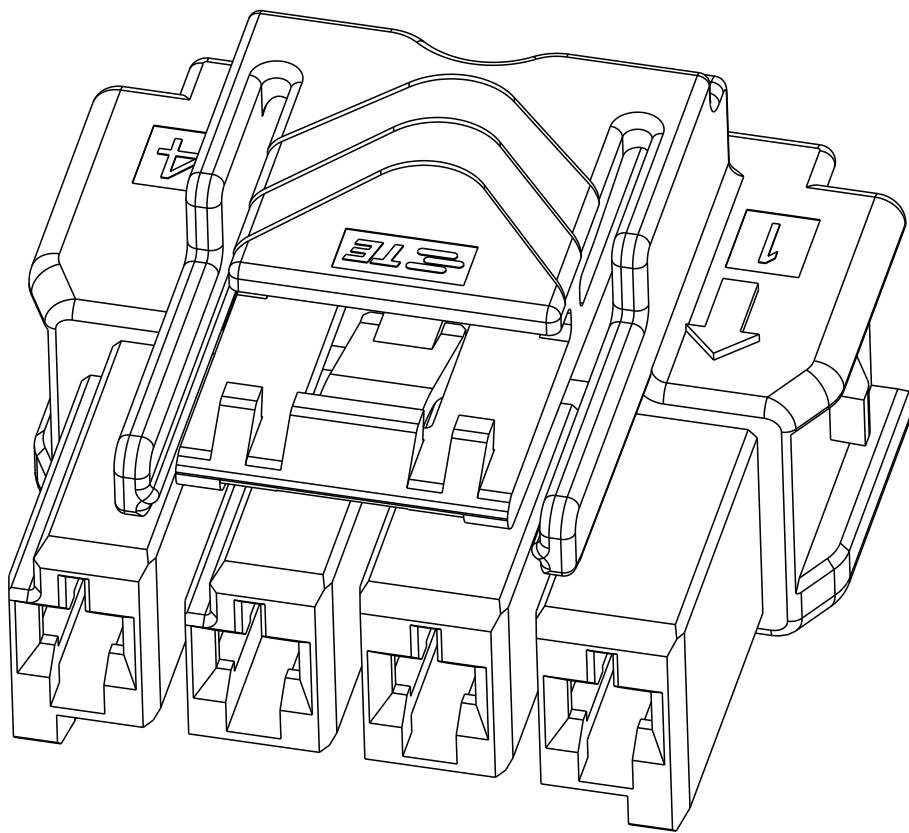
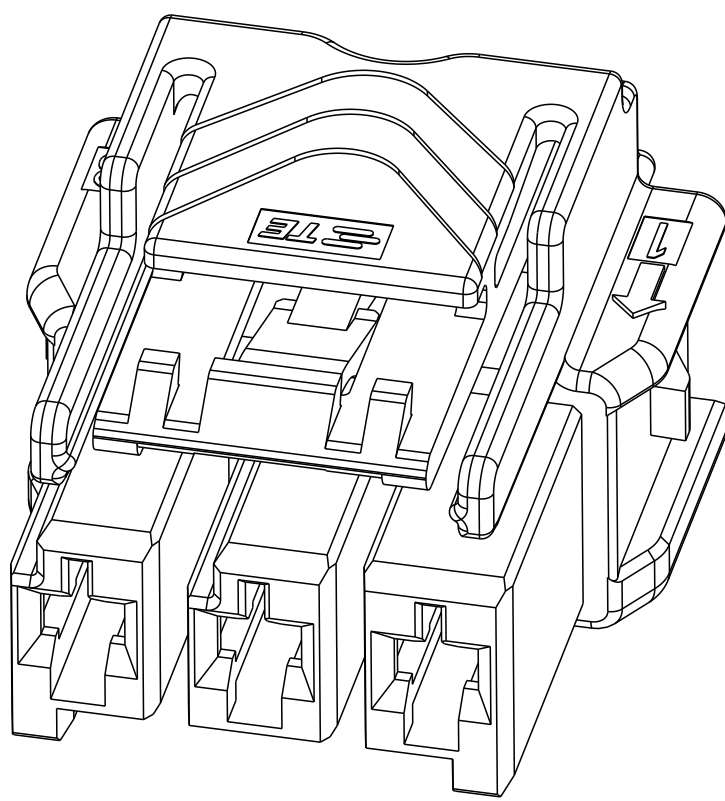
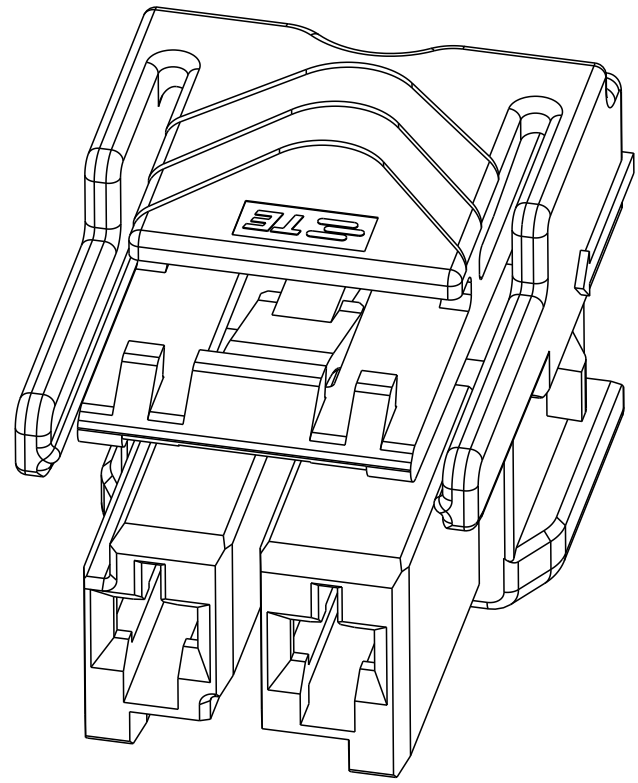


1*2 POSITIONS

1*3 POSITIONS

1*4 POSITIONS

1*5 POSITIONS

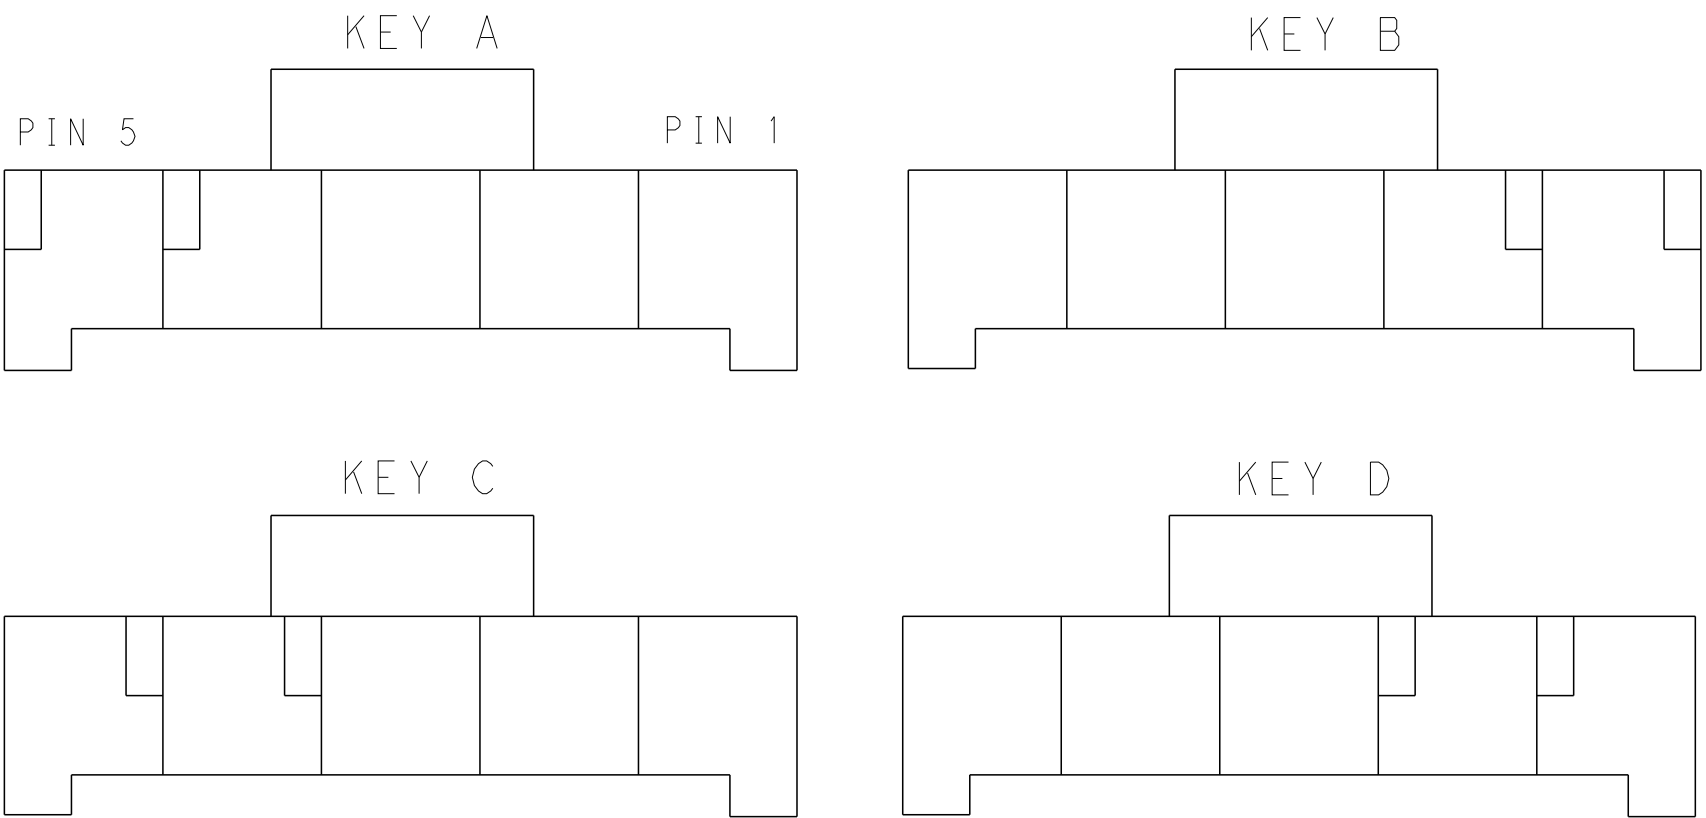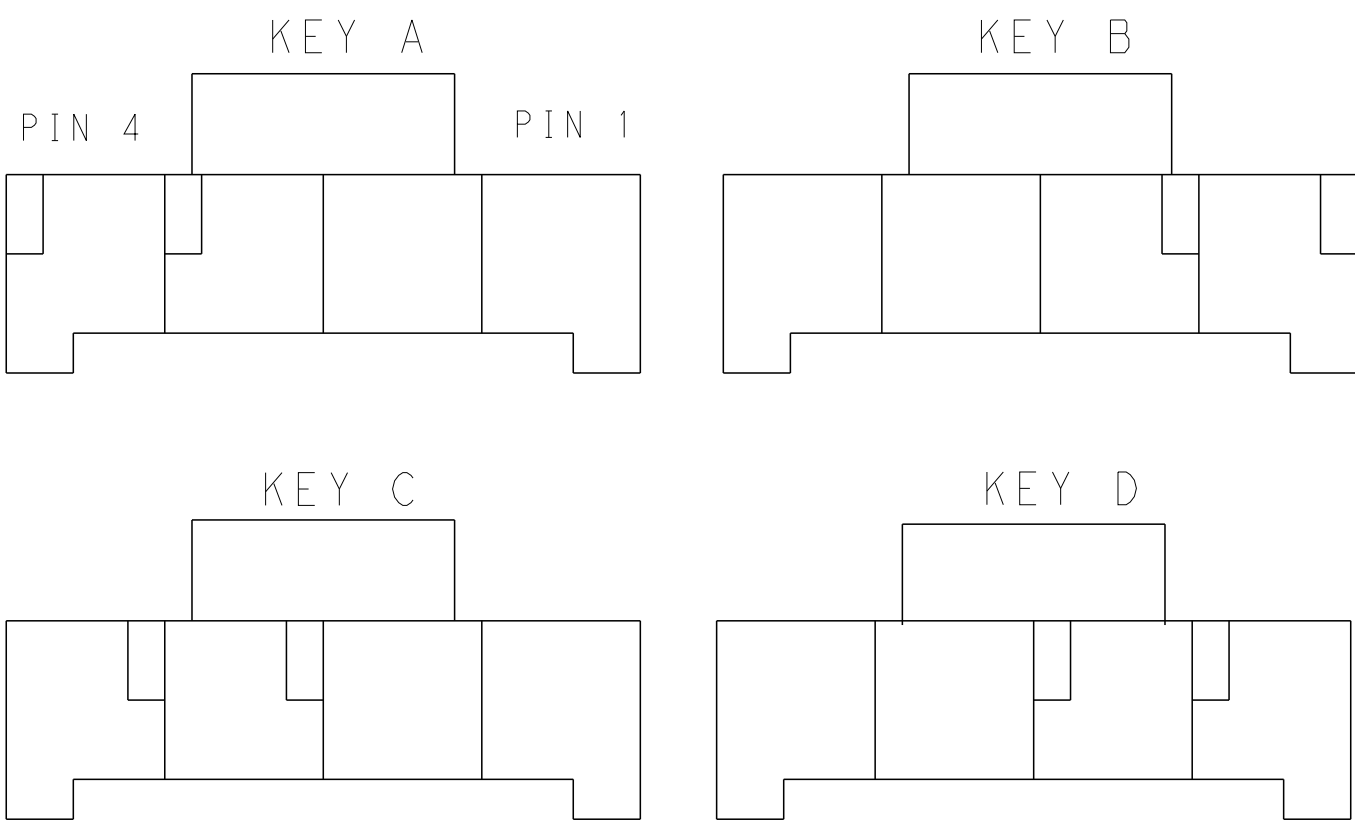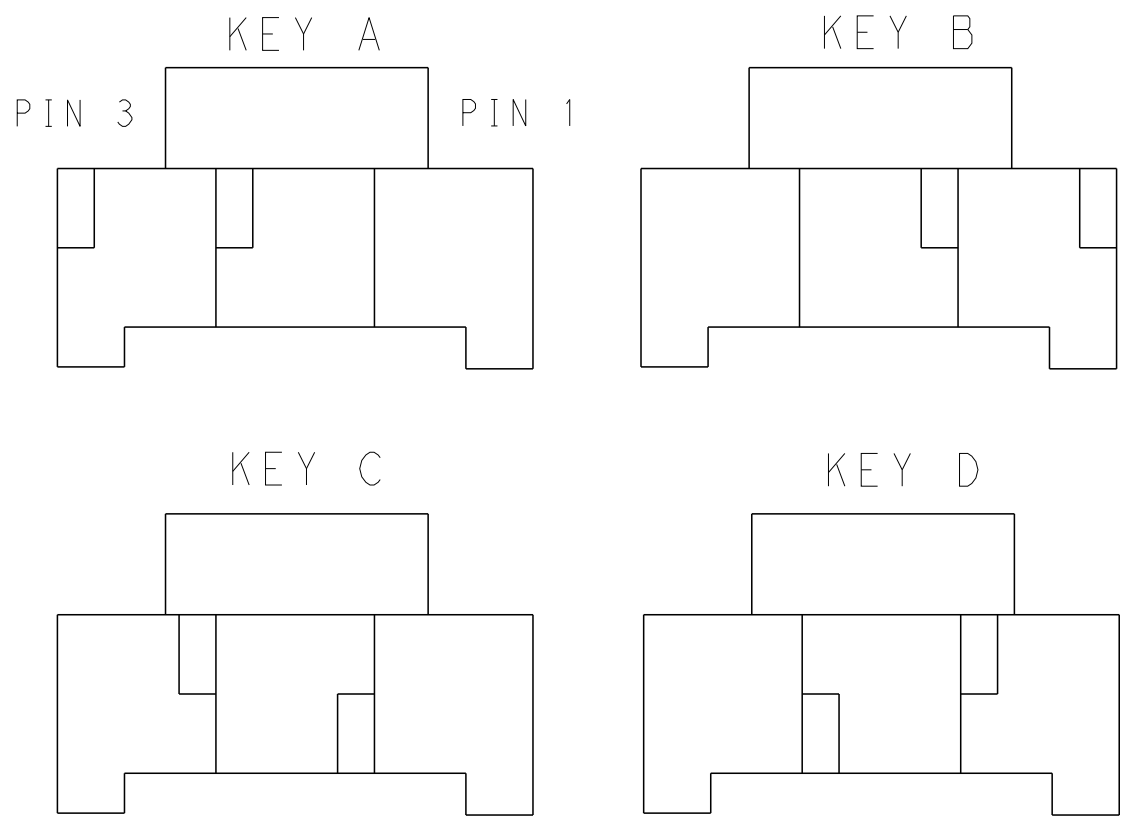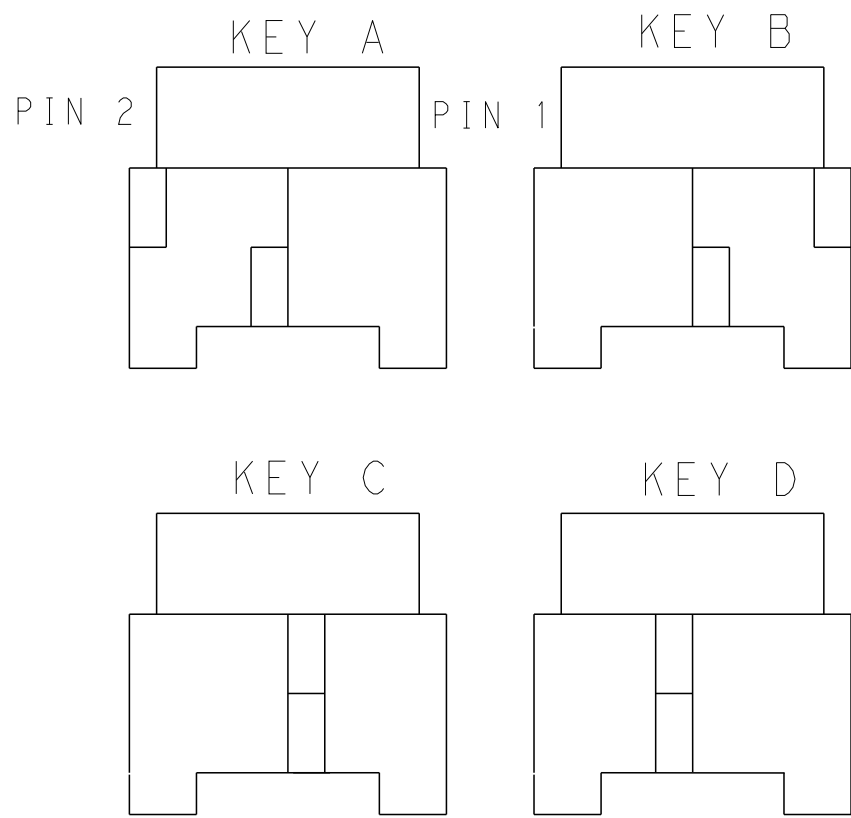

KEYING FOR 1*2 POS.

KEYING FOR 1*3 POS.

KEYING FOR 1*4 POS.

KEYING FOR 1*5 POS.

1*5	LEVEL A	DARK GREY	KEY A	5-2232265-7
		BROWN	KEY B	6-2232265-7
		GREEN	KEY C	7-2232265-7
		ORANGE	KEY D	8-2232265-7
1*4	LEVEL A	BLACK	KEY A	1-2232265-3
		DARK GREY	KEY A	5-2232265-4
		BROWN	KEY B	6-2232265-4
		GREEN	KEY C	7-2232265-4
1*3	LEVEL A	ORANGE	KEY D	8-2232265-4
		BLACK	KEY A	1-2232265-2
		DARK GREY	KEY A	5-2232265-3
		BROWN	KEY B	6-2232265-3
1*2	LEVEL A	GREEN	KEY C	7-2232265-3
		ORANGE	KEY D	8-2232265-3
	LEVEL B	DARK GREY	KEY A	5-2232265-2
		BROWN	KEY B	6-2232265-2
POS.	MATERIAL	COLOR	KEY	P/N

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	TOMMY WU	26MAR2013	TE Connectivity		
		CHK	HAPYE WU	26MAR2013			
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:			NAME		
mm		0 PLC ±.01			PRODUCT SPEC		
		1 PLC ±0.35			108-106118		
		2 PLC ±0.25			APPLICATION SPEC		
		3 PLC ±.01			114-106118		
		4 PLC ±.01			WEIGHT		
		ANGLES			A100779		
		FINISH			C=2232265		
MATERIAL		SEE TABLE			Customer Drawing		
					SCALE		
					SHEET 2 OF 2		
					REV C		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[6-2232265-7](#)