


D

D



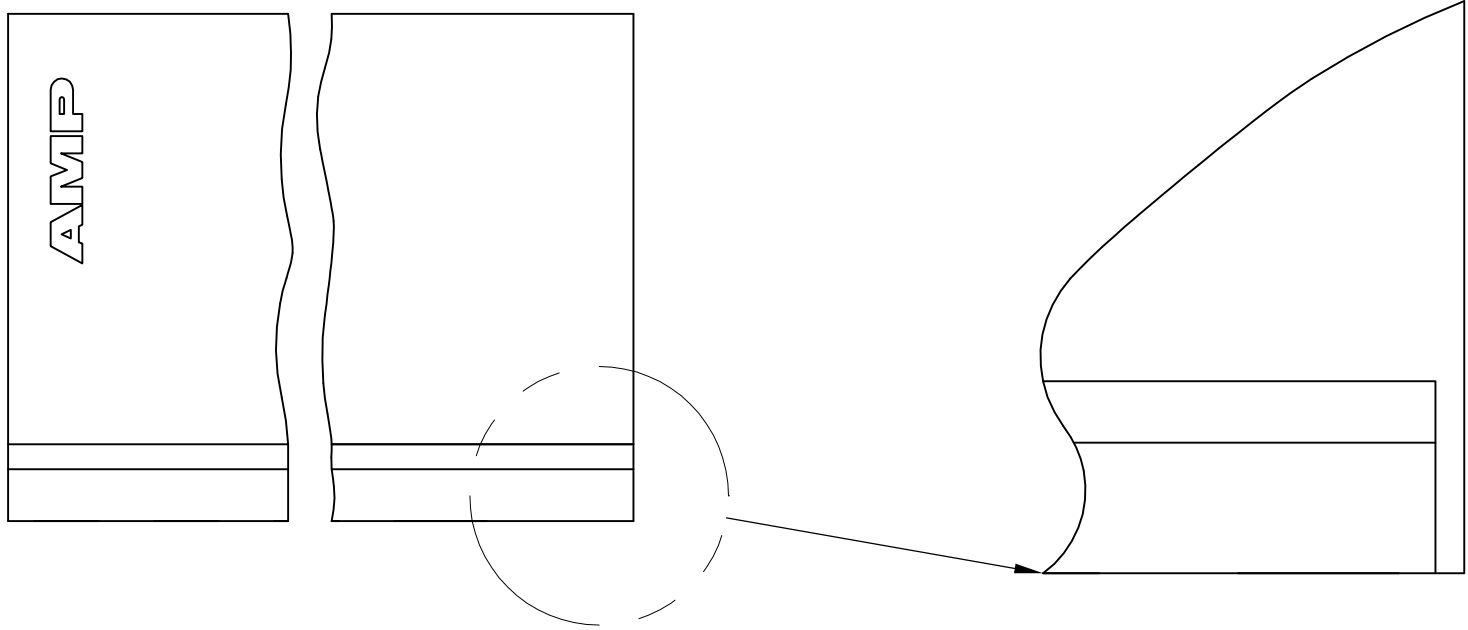


SCALE 10:1

- 1UNIT ACCEPTS 1.14 [.045] SQUARE OR ROUND POST.
- 2UNIT ACCEPTS STANDARD SL-156 CONTACTS.
- 3UNIT ACCEPTS KEYING PLUG 640254-1 AND KEYING PIN 640255-1.
- 4CIRCUIT I.D. NUMBER(S),TO BE LOCATED SEQUENTIALLY AS SHOWN.
- 5DIMENSIONS IN BRACKETS ARE IN INCHES.
- 6OPTIONAL CONSTRUCTION (BOTH CORNERS) UP TO 0.38[.015] FOR P/N -1 THRU -5,UP TO 1.27[.050] FOR P/N -6 THRU 2--4.
- 7ACCEPTS UP TO .110 INCH INSULATION WIRE.



C

C

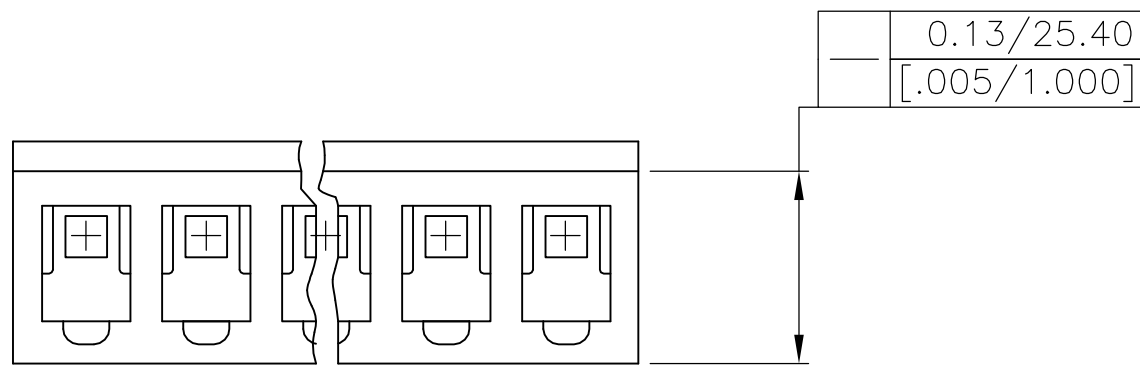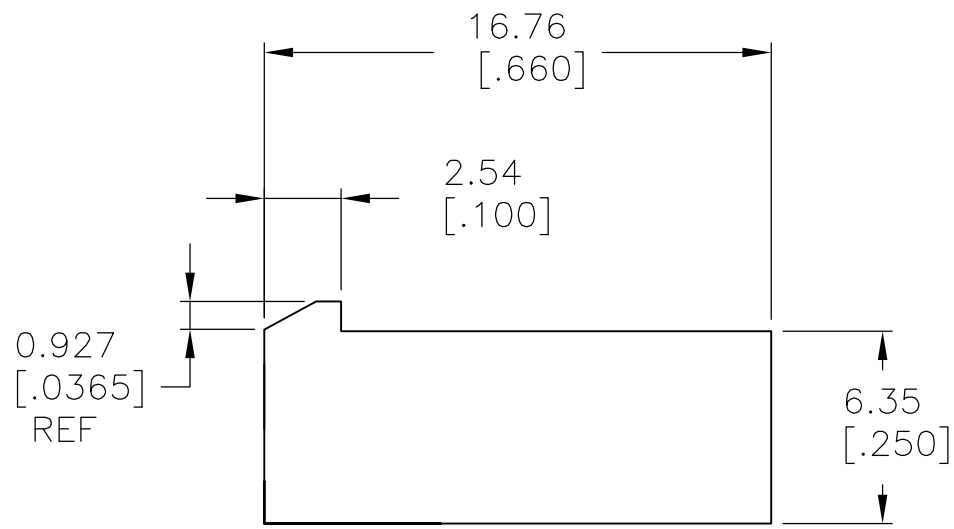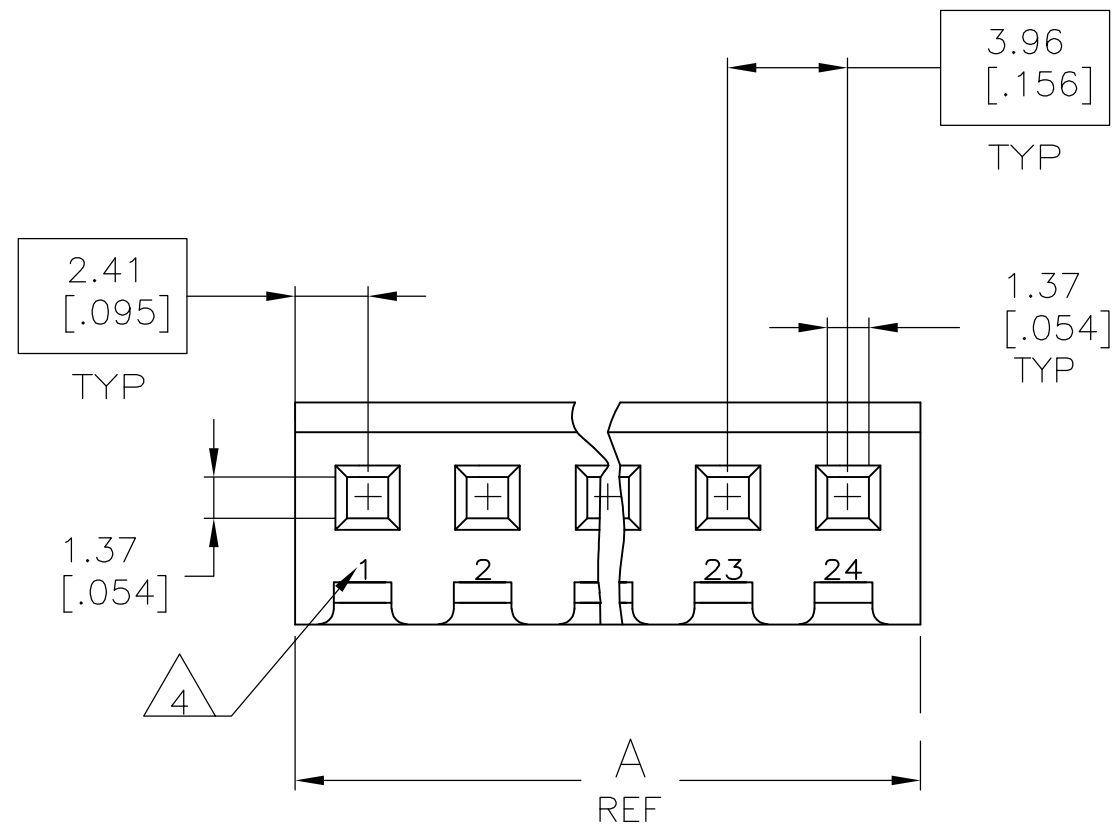

B

B

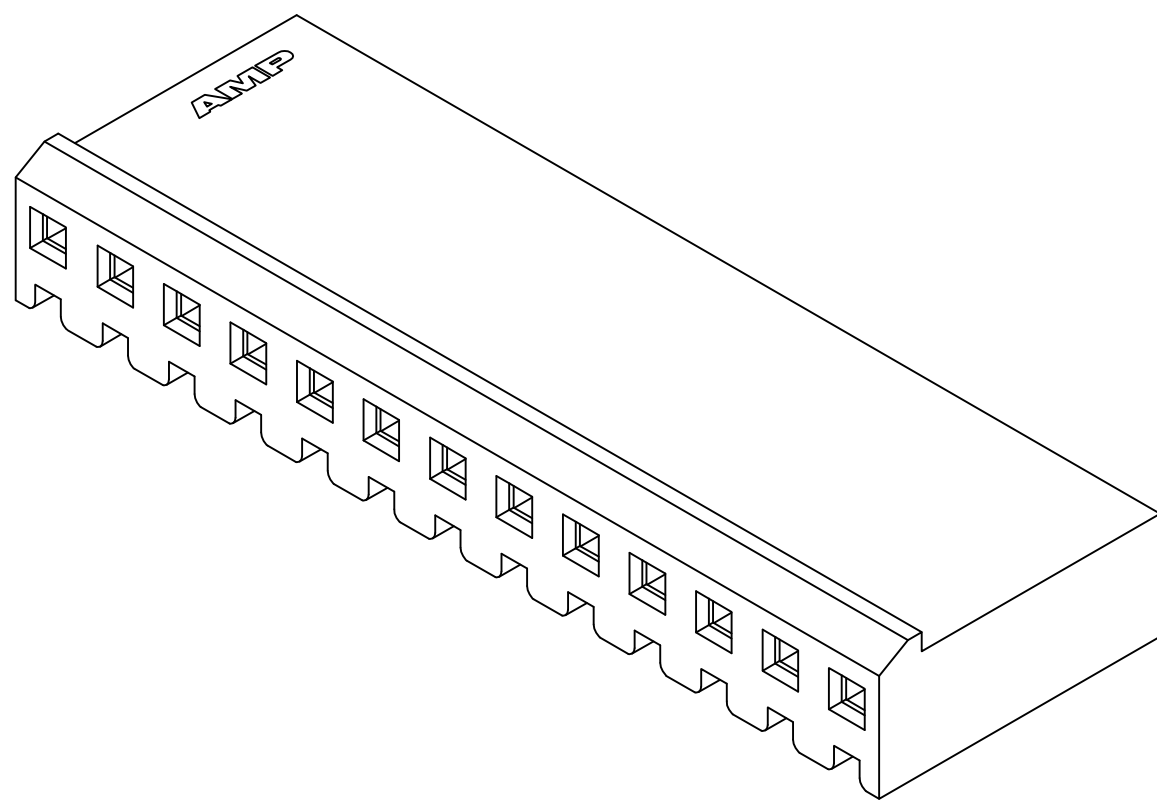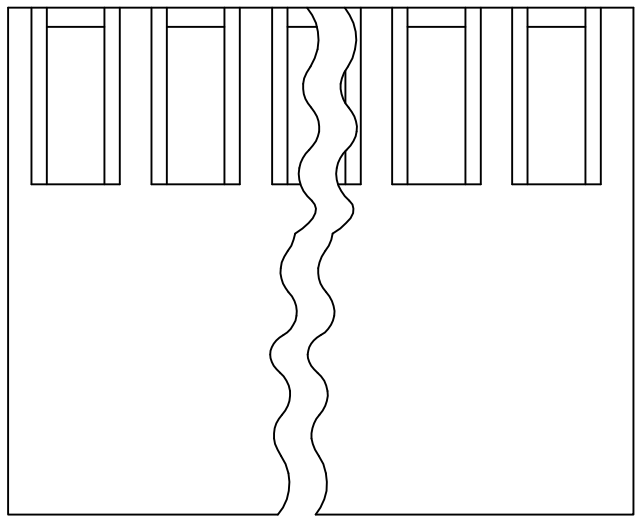

3-DIMENSIONAL MODEL NTS

A

A

|       |         |                 |             |
|-------|---------|-----------------|-------------|
| 95.96 | [3.778] | 24              | 2-647401-4  |
| 92.00 | [3.622] | 23              | 2-647401-3  |
| 88.04 | [3.466] | 22              | 2-647401-2  |
| 84.07 | [3.310] | 21              | 2-647401-1  |
| 80.11 | [3.154] | 20              | 2-647401-0  |
| 76.15 | [2.998] | 19              | 1-647401-9  |
| 72.19 | [2.842] | 18              | 1-647401-8  |
| 68.22 | [2.686] | 17              | 1-647401-7  |
| 64.26 | [2.530] | 16              | 1-647401-6  |
| 60.30 | [2.374] | 15              | 1-647401-5  |
| 56.34 | [2.218] | 14              | 1-647401-4  |
| 52.37 | [2.062] | 13              | 1-647401-3  |
| 48.41 | [1.906] | 12              | 1-647401-2  |
| 44.45 | [1.750] | 11              | 1-647401-1  |
| 40.49 | [1.594] | 10              | 1-647401-0  |
| 36.53 | [1.438] | 9               | 647401-9    |
| 32.56 | [1.282] | 8               | 647401-8    |
| 28.60 | [1.126] | 7               | 647401-7    |
| 24.64 | [.970]  | 6               | 647401-6    |
| 20.68 | [.814]  | 5               | 647401-5    |
| 16.71 | [.658]  | 4               | 647401-4    |
| 12.75 | [.502]  | 3               | 647401-3    |
| 8.79  | [.346]  | 2               | 647401-2    |
| 4.83  | [.190]  | 1               | 647401-1    |
| DIM A |         | NO. OF CIRCUITS | PART NUMBER |

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]

TOLERANCES UNLESS OTHERWISE SPECIFIED:  
0 PLC ± -  
1 PLC ± -  
2 PLC ± -  
3 PLC ± 0.13 [.005]  
4 PLC ± -  
ANGLES ± 0°30'

MATERIAL NYLON,UL94V-0,NAT  
FINISH -

DWN L. McEACHIN 28MAR00  
CHK J. ELLIS 28MAR00  
APVD J. ELLIS 28MAR00

NAME

SIZE CAGE CODE DRAWING NO  
A100779

RESTRICTED TO

PRODUCT SPEC  
APPLICATION SPEC  
WEIGHT -

TE Connectivity  
HOUSING WITH LOCKING RAMP, SL-156, FOR LARGE WIRE INSULATION  
647401

CUSTOMER DRAWING  
SCALE 4:1  
SHEET 1 OF 1  
REV C

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[2-647401-2](#)