

Female insert - VS-MSTBVA 2,5/ 5-GB-5,08-BK-A - 1609565

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)

MSTB contact insert, for PCB assembly, 24 V, 5-pos., with straight solder pins, RAL 9005 (black), for panel mounting frame VS-PPC-F2-MSTB-...-1R-P



Key Commercial Data

Packing unit	50 pc
GTIN	
GTIN	4046356175876

Technical data

Dimensions

Type	Male
------	------

Ambient conditions

Ambient temperature (operation)	-40 °C ... 70 °C
---------------------------------	------------------

General data

Note	This product corresponds to the PROFINET Cabling and Interconnection Technology Guideline for PROFINET regulations, version 2.00, order no: 2.252, Chapter 11 Connectors for 24 Volt Power Supply Cabling and Chapter 13 Application specific Cabling and Interconnection Technology (AIDA)
Number of positions	5
Alternative short product description	Contact insert for PCB mounting
Rated voltage (III/3)	24 V
COMBICON connection data	2.5 mm ²
Connection method	Printed circuit connection
Contact material	Copper alloy
Contact carrier material	PA
Contact surface material	Gold over nickel

Characteristics head 2

Female insert - VS-MSTBVA 2,5/ 5-GB-5,08-BK-A - 1609565

Technical data

Characteristics head 2

Color	black
-------	-------

Standards and Regulations


Connection in acc. with standard	CUL
Flammability rating according to UL 94	V0

Environmental Product Compliance


China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Drawings

Dimensional drawing

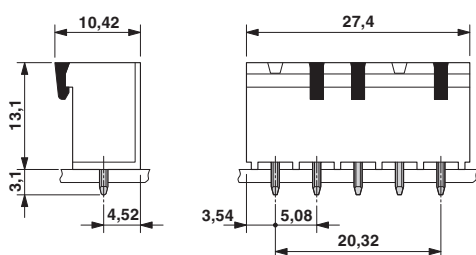

Drilling diagram

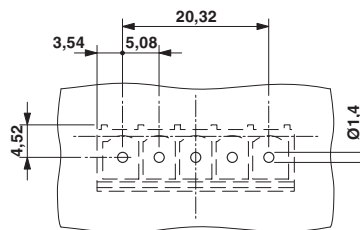

Drilling diagram

MSTB contact insert

Approvals

Approvals

Approvals

EAC / cULus Recognized


Ex Approvals

Approval details

EAC		B.01742
-----	--	---------

Female insert - VS-MSTBVA 2,5/ 5-GB-5,08-BK-A - 1609565

Approvals

cULus Recognized		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm E118976-20080903
Nominal voltage UN	24 V	
Nominal current IN	16 A	

Phoenix Contact 2019 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>